



1/3" Sony CCD Indoor Dome Camera, 600 TVL, 2.8~12mm Varifocal Lens, D-WDR




Specifications

TV SYSTEM	NTSC	PAL
Pickup device	1/3" 410K Sony super HAD II color CCD	
Number of pixels	NTSC: 768(H)x494(V) PAL: 752(H)x582(V)	
System of signal	NTSC/PAL	
Horizontal resolution	Color: 600 TV Lines	
Mini illumination	0.1 Lux /F1.2	
Lens	2.8 ~ 12mm DC Auto iris lens	
S/N ratio	>50 dB	
Gamma correction	> 0.45	
Operation temperature	-10 ~ 50°C	
Video output	Composite Video 1.0Vp-p/75Ω	
Vandal Proof	Yes	
DNR	Yes	
Power supply	DC12V 10% 5.0 Watt	




Dimensions

Part name & Dimension

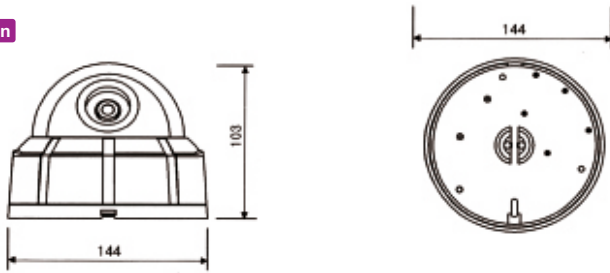


Installation

Step.1




Fix the Camera Base by screws on the ceiling

Step.2



Adjust desired focus and scene by turning and moving Gimbal bracket by hand

Step.3

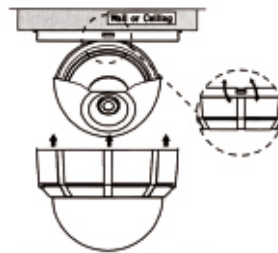

Put the dome cover over the base

Step.4



Turn it clockwise

Setup Menu Flow

OSD MENU SETTING

LENS	MANUAL		
	DC		
	VIDEO		
EXPOSURE	SHUTTER	AUTO, 1/60(50), FLK, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/5000, 1/10000, 1/100000	
	BRIGHTNESS	0-255	
	AGC	OFF, LOW, MIDDLE, HIGH	
	DWDR	LEVEL	0-35
WHITE BAL	ATW1		
	ATW2		
	ATW->SET		
BACKLIGHT	MANUAL	COLOR TEMP	
		BLUE	
		RED	
		AREA SEL	AREA1, AREA2
		AREA STATE	ON, OFF
DAYNIGHT	BLC	GAIN	0-255
		HEIGHT	0-4
		WIDTH	0-15
		LEFT/RIGHT	0-13
		TOP/BOTTOM	0-11
	HLC	LEVEL	0-255
		MODE	ALL DAY, NIGHT ONLY
		D...>N LEVEL	33-208
		D...>N DELAY	1-30 SEC
		N...>D LEVEL	0-80
DPC	AUTO	N...>D DELAY	1-30 SEC
		COLOR	
		BURST	ON, OFF
		IR GAIN	0-255
		HEIGHT	0-8
	B/W	WIDTH	0-13
		LEFT/RIGHT	0-2
		TOP/BOTTOM	0-10
		EXIT	
		COVER THE LENS THAN PRESS ENTER KEY	
MOTION	CAM TITLE	ON, OFF	
		AREA SEL	AREA 1-4
		AREA STATE	ON, OFF
		HEIGHT	0-13
		WIDTH	0-13
		LEFT/RIGHT	0-11
		TOP/BOTTOM	0-11
		DEGREE	0-255
		VIEW	ON, OFF

OSD MENU SETTING

SPECIAL	PRIVACY	AREA SEL	AREA1-8		
		AREA STATE	ON, OFF		
		HEIGHT	0-133		
		WIDTH	0-180		
		LEFT/RIGHT	0-167		
		TOP/BOTTOM	0-116		
		COLOR	0-15		
		LT	0-110		
		LB	0-170		
		RT	0-110		
	PAR. LINE	RB	0-110		
		F	0-110		
		N	0-110		
		T	0-110		
		IMAGE ADJ	LENS SHAD	LEVEL	0-255
			ZDNR	ON, OFF	
			MIRROR	ON, OFF	
			FONT COLOR	FONT	0-15
			CONTRAST	ID & TITLE	0-15
			SHARPNESS		0-51
DISPLAY	CRT		PED LEVEL	0-63	
			COLOR GAIN	0-255	
			GAMMA	0.5-1.0	
	LCD		PED LEVEL	0-63	
		COLOR GAIN	0-255		
		GAMMA	0.5-1.0		
USER	PED LEVEL	0-63			
	COLOR GAIN	0-255			
NEG. IMAGE	ON, OFF				
COMM ADJ	CAM ID				
	BAUD RATE				
	PROTOCOL				
	DISPLAY ID				
	ID POS				
LANGUAGE	ENGLISH, CHINESE				
VERSION	21 01 10				
RESET	FACTORY	RESET			
EXIT					

* Depending on setting of sub menu, the default value may be changed.

