
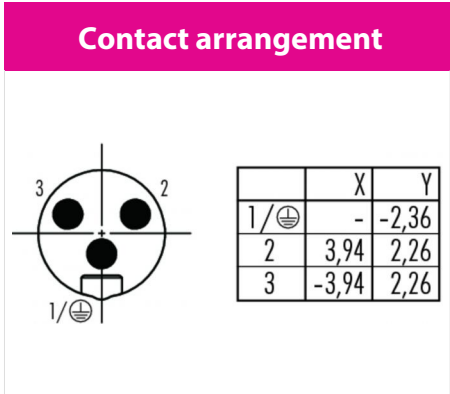


Product description	<b>Cable outlet: 6 - 8 mm, Contacts 2+PE, cable plug connector UL approval, with pin marking in the connecting area</b>
Area	<b>7/8" Series 820</b>
Order number	<b>99 2441 12 03</b>

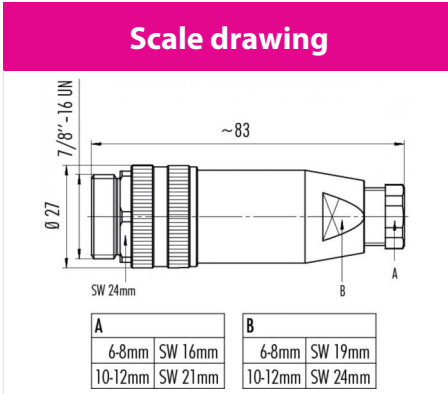

You can find the component part drawing and assembly instructions on the next page.

## Technical data

### General values

Connector design	Cable Connector
Connector locking system	bolted
Termination	screw
Wire gauge (mm)	1,50 mm <sup>2</sup>
Wire gauge (AWG)	16
Cable outlet	6 - 8 mm
Upper limit temperature	85 °C
Lower limit temperature	-25 °C

### Cable data

Approval 1	UL
------------	----

### Electrical values

Rated voltage	300 V
Rated impulse voltage	4000 V
Pollution degree	3
Overvoltage category	III
Insulating material group	III
Rated current (40 °C)	12 A
Volume resistivity	≤ 5 mΩ
EMC compliance	not shielded
Degree of protection	IP67
Mechanical operation	> 100 Mating cycles


### Material

Contact material	CuZn (Messing)
Contact plating	Au (gold)
Contact body material	PUR, PA


Product description **Cable outlet: 6 - 8 mm, Contacts 2+PE, cable plug connector UL approval, with pin marking in the connecting area**

Area **7/8" Series 820**  
Order number **99 2441 12 03**

Component part drawing

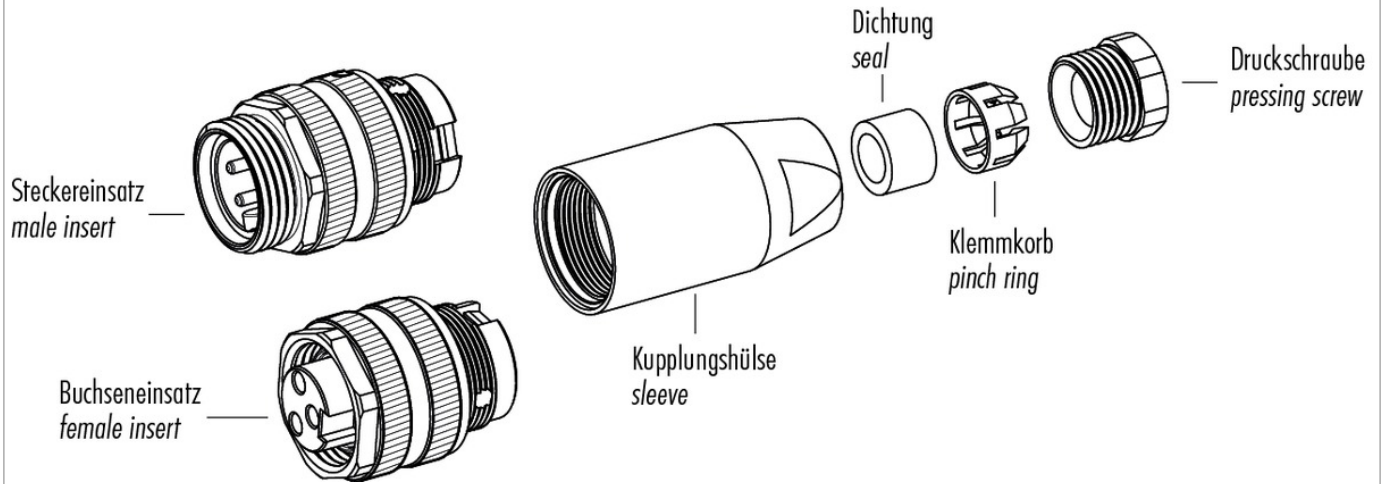

Assembly instructions / Panel cut-out

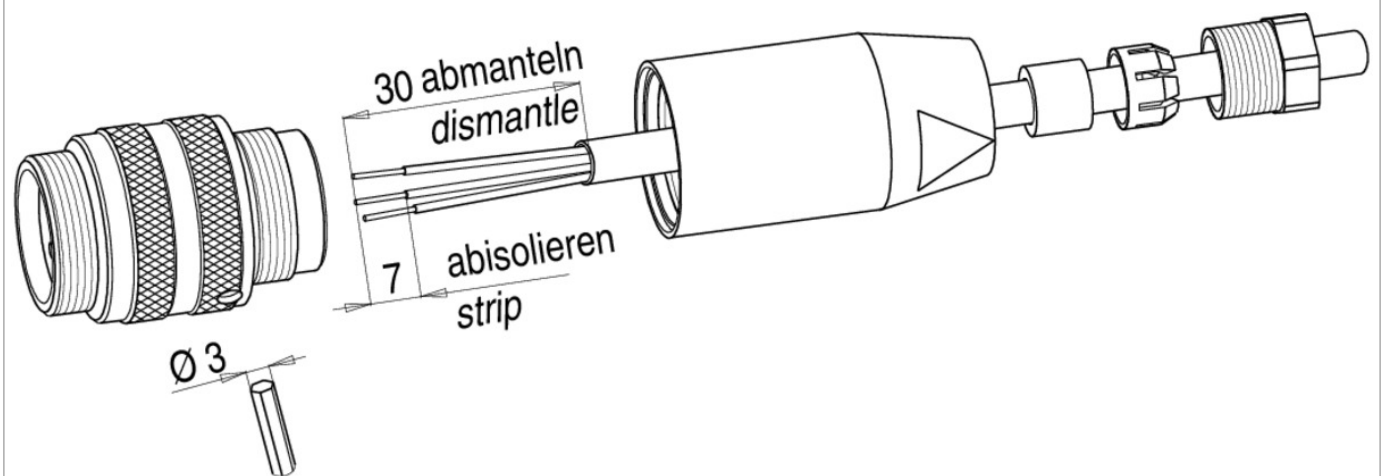

Product description	<b>Cable outlet: 6 - 8 mm, Contacts 2+PE, cable plug connector UL approval, with pin marking in the connecting area</b>
Area	<b>7/8" Series 820</b>
Order number	<b>99 2441 12 03</b>

## Sicherheitshinweise

1. The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.
2. The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.
4. Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.
6. Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.
8. To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).