


Datasheet

Art.No. 71.354.1035.1

Hood BAS GOT GI 10 M25 A2

revos BASIC 500V size 10 hood with threaded collar M25, top cable entry, single locking lever

version .0

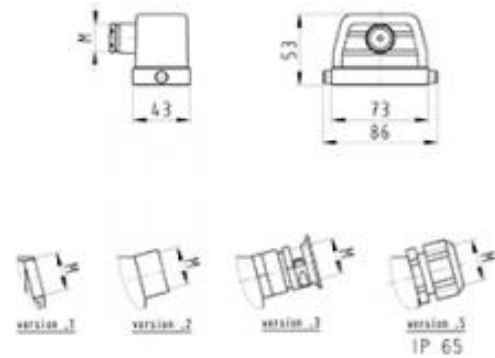

Art.No.	71.354.1035.1
EAN	4015573651401
Order unit	1 pieces

Approvals



Technical data

General

Housing material	Aluminium
Colour	Grey
Surface	With powder coating
Degree of protection (IP)	Other
UV resistant	Yes
Inflammability class of insulation material acc. with UL94	Other
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C

Model

DIN-size	10
Model	male
Locking mechanism	Single locking lever
Cable entry	Above
Type of cable	Thread
With cable screw gland	No
Thread size M	25
Hinged lid	No
EMC-version	No

Classification

ECLASS 8.1	27440202: Housing for industrial connectors
ETIM 6.0	: EC000437

ETIM 5.0	EC000437: Housing for industrial connectors
ETIM 4.0	EC000437: Housing for industrial connectors
ETIM 3.0	EC000437: Housing for industry plug connectors

Drawings

Varianten/ Variants

71.352.1035.5	BAS 60T 61 10 M25 A5	Kabelverschraubung(KV), IP65 /Cable gland(CB), IP65
71.352.1035.4	BAS 60T 61 10 M20 A4	KV mit Zugentlastung, IP54 /CG with strain relief, IP54
71.352.1035.3	BAS 60T 61 10 M25 A3	KV mit Zugentlastung und Kriechschutz, IP54 /CG with strain relief and creep protect., IP54
71.352.1035.2	BAS 60T 61 10 M20 A2	Zwischensitzlösen /Bushing
71.352.1035.1	BAS 60T 61 10 M20 A1	Gewindebohrung /Thread hole
71.352.1035.0	BAS 60T 61 10 M20 A0	Kabelverschraubung(KV), IP54 /Cable gland(CB), IP54

Bestellnummer / Order number:

Typ / Type:

Varianten / Variants:

Weitere Daten, siehe KATALOG oder eKatalog. www.wieland-electric.com
Additional data see CATALOG or eCatalog. shop.wieland-electric.com

/	Kontakt/Abtaster Abtaster Inkubator / contact probe	2013	Typ/Name	Zusätzliche Abmessung Nr. Additional dimension No.	Best.- / Ord.-Nr. Part / Order No.	Einheit / Unit	Anzahl / Qty
/	1-2		T	71.352.1035.0 13K			

GEHAUSEOBERTEIL
Housing top part
Housing top part for M20/M25