


Product description	<b>Contacts: 3, cable plug connector</b>
Area	<b>Bayonet IP40 Power Series 690</b>
Order number	<b>09 0055 00 03</b>

**Illustration**



**Scale drawing**

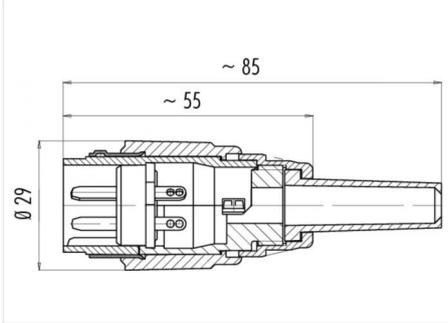

**Contact arrangement**

	X	Y
1	-2,39	-2,14
2	2,39	-2,14
3	0,00	3,00

You can find the component part drawing on the next page.

**Technical data**

**General values**

Connector design	Cable Connector
Connector locking system	Bayonet
Termination	solder
Wire gauge (mm)	2,50 mm <sup>2</sup>
Wire gauge (AWG)	14
Cable outlet	5 – 8 mm
Upper limit temperature	85 °C
Lower limit temperature	-40 °C

**Electrical values**

Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	1
Overvoltage category	II
Insulating material group	III
Rated current (40 °C)	10 A
Volume resistivity	≤ 5 mΩ
EMC compliance	Shielding is not possible
Degree of protection	IP40
Mechanical operation	> 50 Mating cycles


**Material**

Contact material	CuZn (Messing)
Contact plating	Ag (silver)
Contact body material	PET (UL 94 V-0)

Product description **Contacts: 3, cable plug connector**

Area **Bayonet IP40 Power Series 690**  
Order number **09 0055 00 03**

Component part drawing

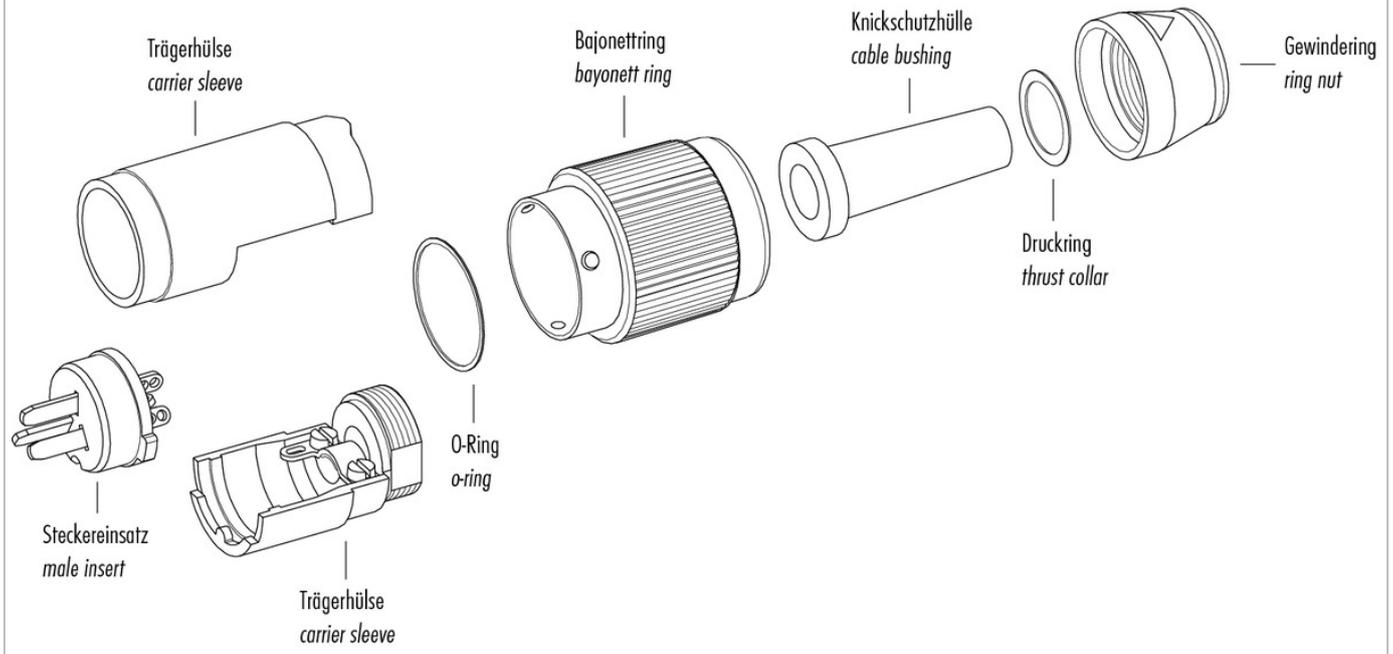

Product description      **Contacts: 3, cable plug connector**

Area                              **Bayonet IP40 Power Series 690**  
Order number                **09 0055 00 03**

### Sicherheitshinweise

1. The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.
2. The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.
4. Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.