


Datasheet

Art.No. 70.810.4656.0

Male insert BAS STCK 46 50 PC

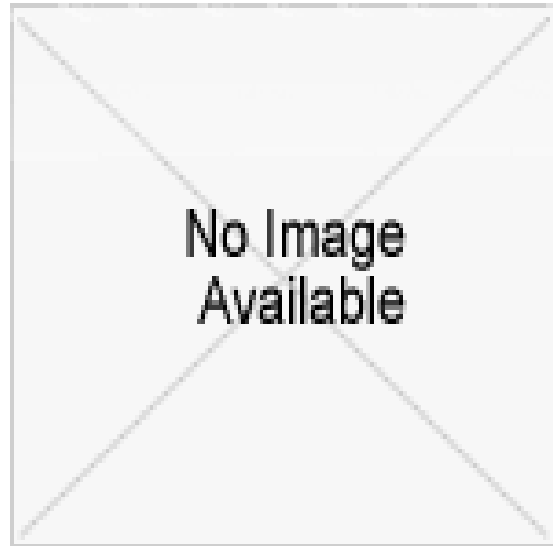

Art.No.	70.810.4656.0
EAN	4015573861978
Order unit	10 pieces

Drawings

**Verpackung/packaging: 5 Stück im Karton / 5 pieces in the cardboard**

**gezeichnet/drawn: 70.810.3256.0**

X (im 180° gedreht/around 180° turned)

**Technische Daten**  
**Technical Data**

Bemessungsspannung rated voltage	500V
Bemessungsstrom rated current	16A
Bemessungsstoßspannung rated peak voltage	6kV
Verschmutzungsgrad degree of pollution	3
Isoliermaterial insulating material	Polycarbonat
Brennbarkeitsklasse flammability rating	UL 94 V-0
Temperaturbereich temperature range	-40°C - +125°C

Teile - Nr. part no.	Typ type	A	B	Polz. pole
70.810.1056.0	BAS STACK 10 50 PC	44	51	10
70.810.1856.0	BAS STACK 18 50 PC	57	64	18
70.810.3256.0	BAS STACK 32 50 PC	77,5	84	32
70.810.4656.0	BAS STACK 46 50 PC	104	111	46

**Zubehör - Steckkontakte**  
**Accessories - plug contact**

Bestell-Nr.	Ømm <sup>2</sup>	AWG
05.543.70MM.0	0,5	20 AWG
05.543.71MM.0	0,75-1	18 AWG
05.543.72MM.0	1,5	16 AWG
05.543.73MM.0	2,5	14 AWG

**MM Oberfläche**  
**Surface**

01	vergoldet/gold plated
02	versilbert/silver plated

**Wieland**  
Wielandwerke  
Waldshut

**STECKER INSATZ**  
für Gruppkontakte 500V 16A  
male insert for crimp contacts