


## Datasheet

Art.No. 71.354.2435.1

Hood BAS GOT GI 24 M32 A1

revos BASIC 500V size 24 hood with threaded collar M32, top cable entry, single locking lever

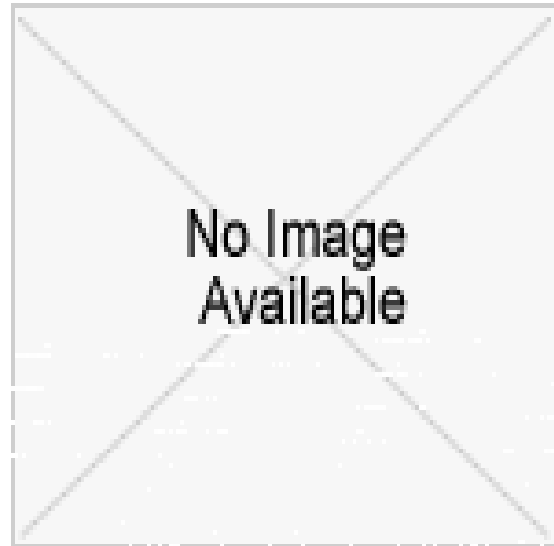

Art.No.	71.354.2435.1
EAN	4015573651791
Order unit	1 pieces

## Approvals



## Technical data

### General

Housing material	Aluminium
Colour	Grey
Surface	With powder coating
Degree of protection (IP)	Other
UV resistant	Yes
Inflammability class of insulation material acc. with UL94	Other
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C

### Model

DIN-size	24
Model	male
Locking mechanism	Single locking lever
Cable entry	Above
Type of cable	Thread
With cable screw gland	No
Thread size M	32
Hinged lid	No
EMC-version	No

### Classification

ECLASS 8.1	27440202: Housing for industrial connectors
ETIM 6.0	: EC000437

ETIM 5.0	EC000437: Housing for industrial connectors
ETIM 4.0	EC000437: Housing for industrial connectors
ETIM 3.0	EC000437: Housing for industry plug connectors

Drawings

Varianten/ Variants

.0

.2

.3

.4

.5

71.352.4.2435.5	BAS 60T 61 24 M25 A5	Kabelverschraubung (KV), IP65 /Cable gland (CG), IP65
71.352.4.2435.4	BAS 60T 61 24 M25 A4	KV mit Zugentlastung, IP54 /CG with strain relief, IP54
71.352.4.2435.3	BAS 60T 61 24 M25 A3	KV mit Zugentlastung und Krallschutz, IP54 /CG with strain relief and bend support, IP54
71.352.4.2435.2	BAS 60T 61 24 M25 A2	Zwischenstutzen /Bushing
71.352.4.2435.1	BAS 60T 61 24 M25 A1	Seiteneinbohrung /Thread hole
71.352.4.2435.0	BAS 60T 61 24 M25 A0	Kabelverschraubung (KV), IP54 /Cable gland (CG), IP54

**Weitere Daten, siehe KATALOG oder eCatalog.**  
Additional data see CATALOG or eCatalog.

www.wieland-electric.com  
eshop.wieland-electric.com

<p>Bestellnummer / Order number</p>		<p>Typ / Type</p>		<p>Variante / Variant</p>	
<p>71.352.4.2435.5</p>		<p>BAS 60T 61 24 M25 A5</p>		<p>Kabelverschraubung (KV), IP65</p>	
<p>71.352.4.2435.4</p>		<p>BAS 60T 61 24 M25 A4</p>		<p>KV mit Zugentlastung, IP54</p>	
<p>71.352.4.2435.3</p>		<p>BAS 60T 61 24 M25 A3</p>		<p>KV mit Zugentlastung und Krallschutz, IP54</p>	
<p>71.352.4.2435.2</p>		<p>BAS 60T 61 24 M25 A2</p>		<p>Zwischenstutzen</p>	
<p>71.352.4.2435.1</p>		<p>BAS 60T 61 24 M25 A1</p>		<p>Seiteneinbohrung</p>	
<p>71.352.4.2435.0</p>		<p>BAS 60T 61 24 M25 A0</p>		<p>Kabelverschraubung (KV), IP54</p>	