




2PF

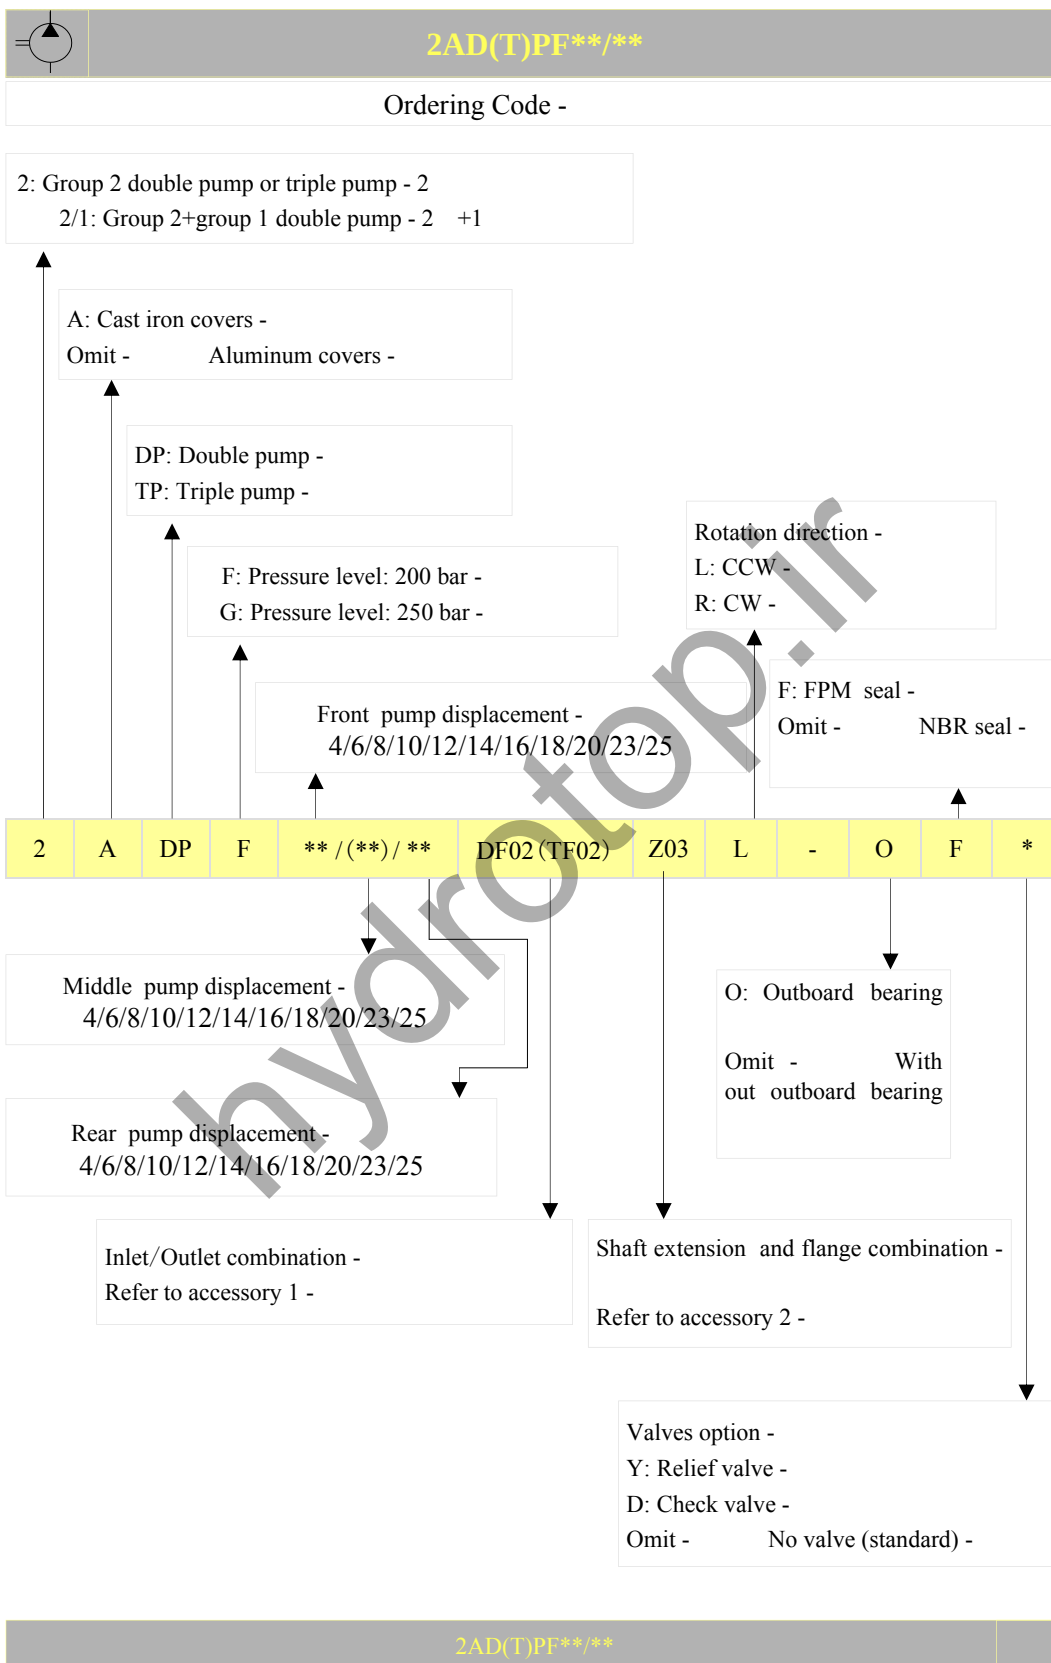


2PF**L**P02*


Specifications -

Model	Displacement (ml/r)	Pressure (bar)		Speed (r/min)			L (mm)	L1 (mm)	D (mm)	
		Rated	Peak	Rated	Max	Min			Inlet	Outlet
2PF4L09P02*	4	200(250)	250(300)	2000	3500	500	96	43.3	PT 1/2	PT 1/2
2PF6L09P02*	6	200(250)	250(300)	2000	3500	500	98	45		
2PF8L09P02*	8	200(250)	250(300)	2000	3500	500	102	46.5		
2PF10L09P02*	10	200(250)	250(300)	2000	3500	500	104	48		
2PF12L10P02*	12	200(250)	250(300)	2000	3500	500	108	50	PT 3/4	PT 1/2
2PF14L10P02*	14	200(250)	250(300)	2000	3500	500	110	51		
2PF16L10P02*	16	200(250)	250(280)	2000	3500	500	114	53		
2PF18L10P02*	18	200(250)	250(280)	2000	3500	500	117	55		
2PF20L10P02*	20	200(250)	250(280)	2000	3500	500	120	56		
2PF23L10P02*	23	200	250	2000	3000	500	123	58		
2PF25L10P02*	25	200	250	2000	3000	500	128	60		
2PF28L10P02*	28	160	200	2000	3000	500	133	63		
2PF30L10P02*	30	160	200	2000	3000	500	136	64		

Dimension -

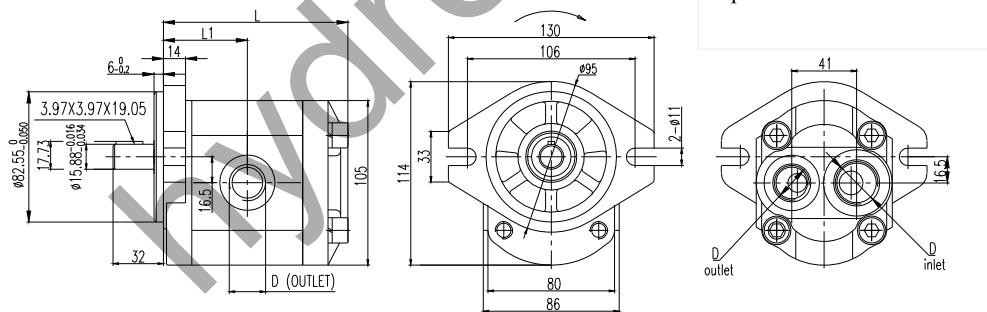

2PF**L**S03-Y With Relief Valves - 2PF**L**S03-Y

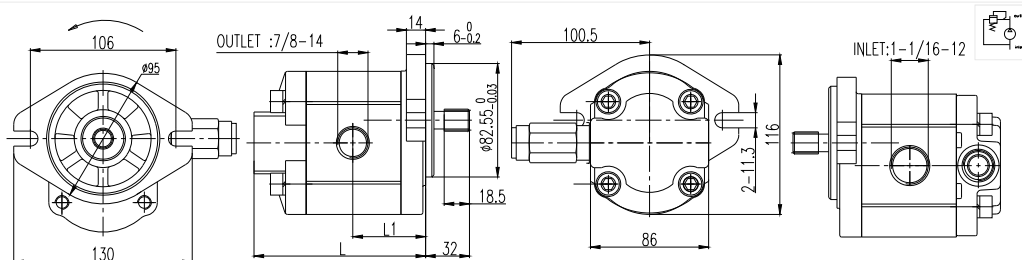

Adjusted Pressure of Relief Valves -

50 Bar to 250 Bar

2PF**L**P02*