





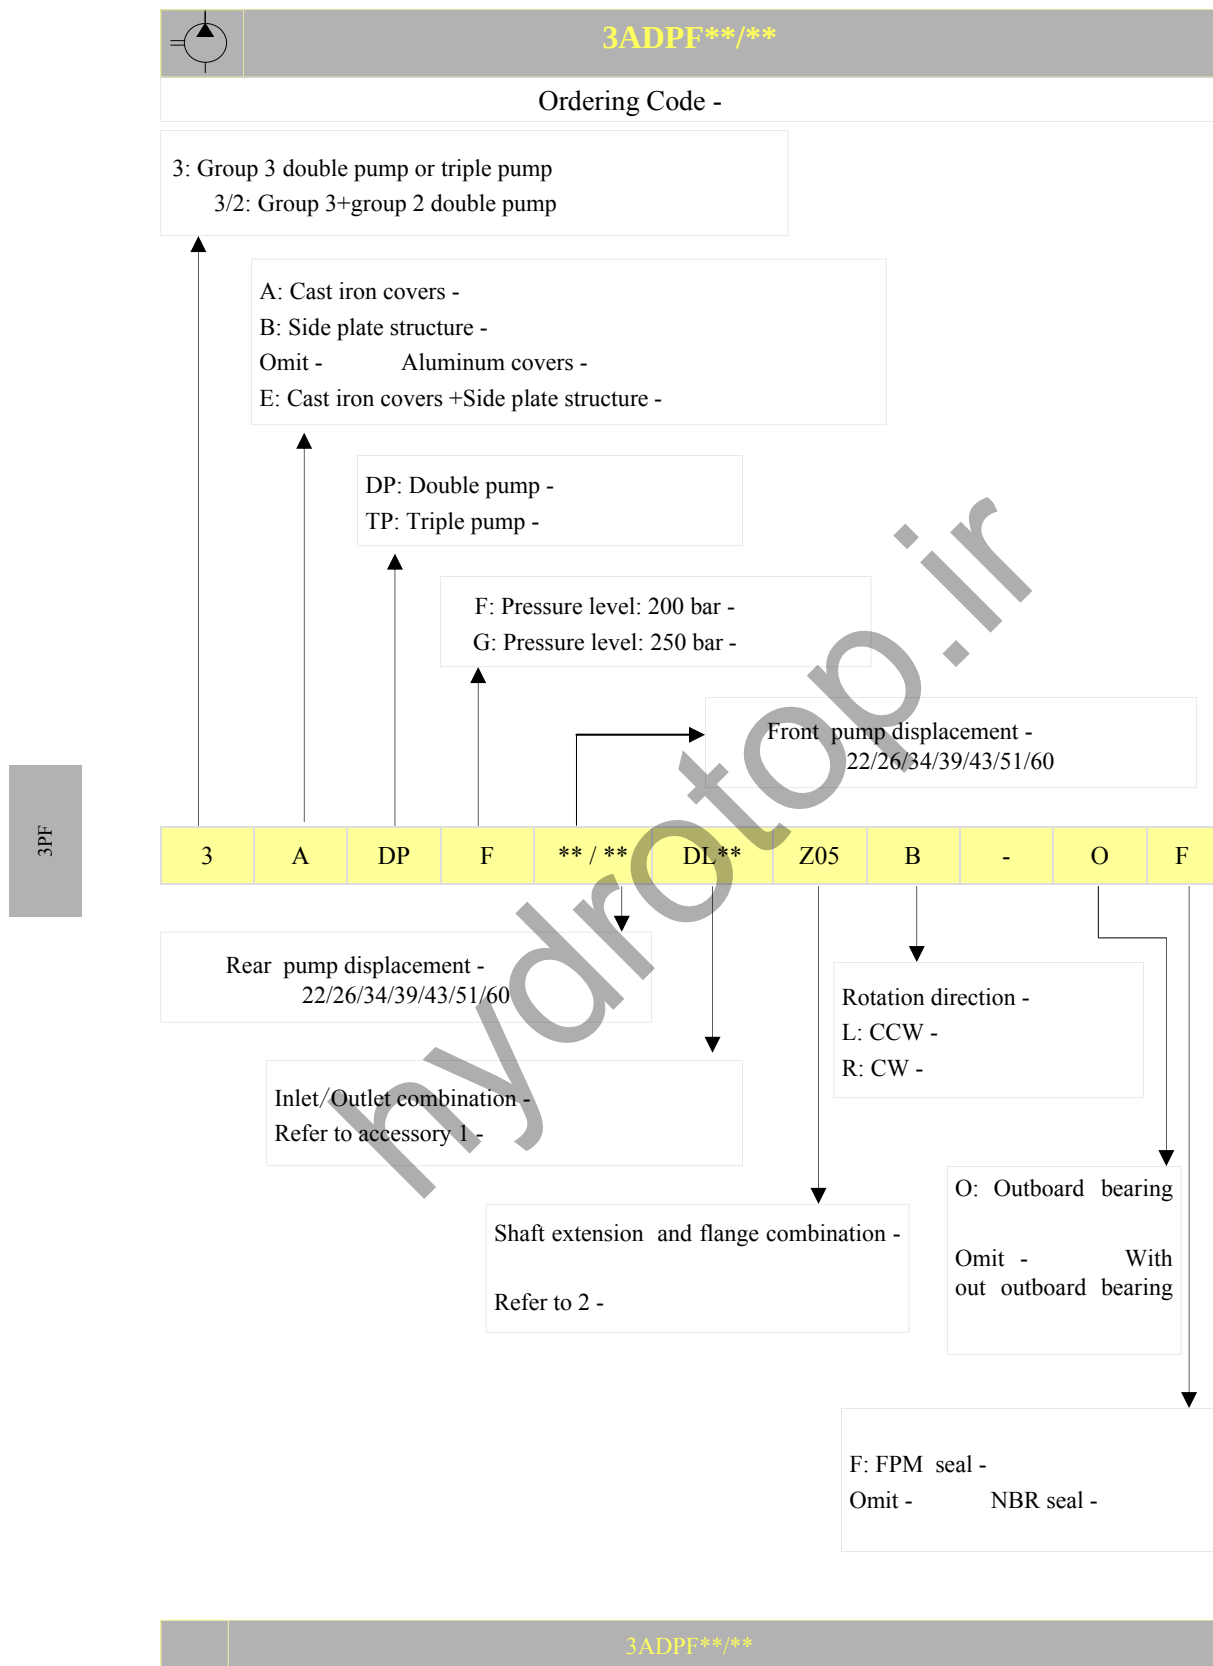


Specifications -

Model	Displacement (ml/r)	Pressure (bar)		Speed (r/min)			L (mm)	L1 (mm)	ϕD1 (mm)	ϕd1 (mm)	T1 (mm)	ϕD2 (mm)	ϕd2 (mm)	T2 (mm)
		Rated	Peak	Rated	Max	Min								
3APF22F10	22	200(250)	250(300)	2000	3000	400	128.5	65.5	56	27	M10	56	19	M10
3APF26F10	26	200(250)	250(300)	2000	3000	400	131.5	67						
3APF34F10	34	200(250)	250(300)	2000	3000	400	137	69.8						
3APF39F10	39	200(250)	250(300)	2000	3000	400	141	71.8						
3APF43F09	43	200(250)	250(300)	2000	2800	400	143.5	73	51	27		51	27	
3APF51F11	51	200(250)	250(300)	2000	2400	400	149.5	76	56	27	56	27		
3APF60F12	60	180(200)	230(250)	1500	2800	400	156	79.3	62	33	51	27		
3APF70F12	70	180(200)	200(230)	1500	2500	400	163	82.8						
3APF78F12	78	160(200)	200(230)	1500	2300	400								
3APF89F12	89	140(180)	180(200)	1500	2000	400								

Dimension -

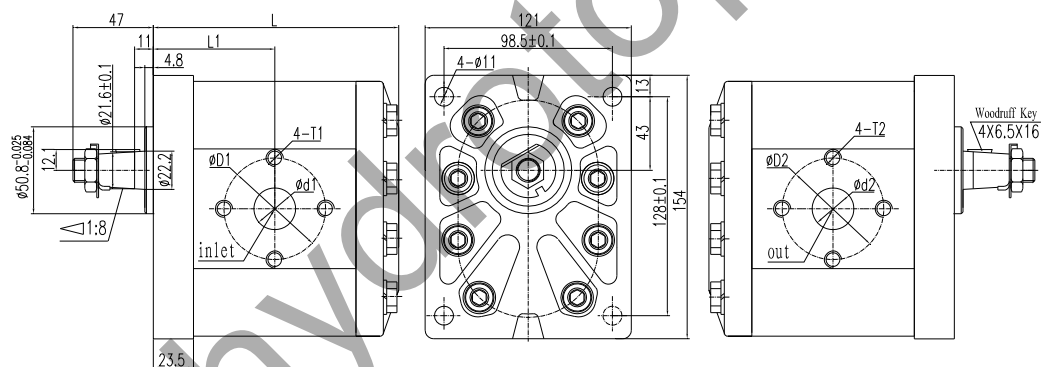

3APF**/**DL**P88* DOUBLE PUMPS - 3APF**/**DL**Z05(S05)*

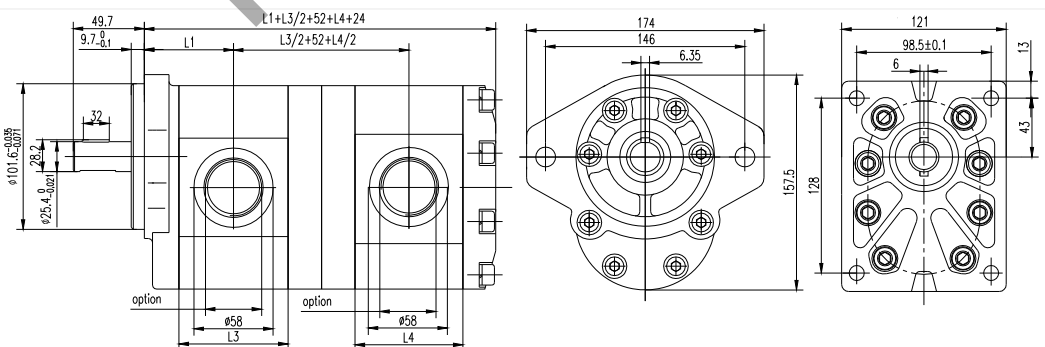

Displacement -	ml/r)	22	26	34	39	43	51	60	70
L3(Front Pump) L4(Rear Pump)		80	83	88.5	92.5	95	101	107.5	114.5

3APF**F**Z05*

3PF