


# Axial piston fixed pump

## A17FO series 10

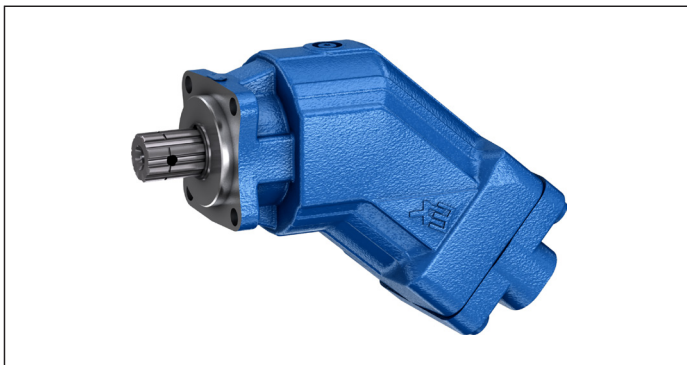

- ▶ High-pressure pump for use in commercial vehicles
- ▶ Sizes 23 to 107
- ▶ Nominal pressure 350 bar
- ▶ Maximum pressure 400 bar
- ▶ Bent-axis design
- ▶ Open circuit

### Features

- ▶ Flange and shaft designed for direct mounting on the power take-off of commercial vehicles
- ▶ Weight-optimized thanks to diecast aluminum housing
- ▶ No case drain line necessary
- ▶ Reduced noise
- ▶ Straightforward adjustment of direction of drive
- ▶ Excellent suction performance
- ▶ High total efficiency
- ▶ Long service life

### Contents

|                           |    |
|---------------------------|----|
| Ordering code             | 2  |
| Hydraulic fluid           | 3  |
| Operating pressure range  | 5  |
| Technical data            | 6  |
| Direction of rotation     | 8  |
| Dimensions size 23, 32    | 9  |
| Dimensions size 45        | 11 |
| Dimensions size 63        | 13 |
| Dimensions size 80        | 15 |
| Dimensions size 107       | 17 |
| Accessories               | 19 |
| Installation instructions | 22 |
| Project planning notes    | 24 |
| Safety instructions       | 25 |
| Related documentation     | 26 |

Ordering code

|      |    |    |   |    |    |    |    |    |    |    |   |    |
|------|----|----|---|----|----|----|----|----|----|----|---|----|
| 01   | 02 | 03 |   | 04 | 05 | 06 | 07 | 08 | 09 | 10 |   | 11 |
| A17F | O  |    | / | 10 | N  | L  | W  | K0 | E8 | 1  | - |    |

Axial piston unit

|    |                                                                                                              |      |
|----|--------------------------------------------------------------------------------------------------------------|------|
| 01 | Bent-axis design, fixed, nominal pressure 350 bar, maximum pressure 400 bar, for commercial vehicles (truck) | A17F |
|----|--------------------------------------------------------------------------------------------------------------|------|

Operating mode

|    |                    |   |
|----|--------------------|---|
| 02 | Pump, open circuit | O |
|----|--------------------|---|

Sizes (NG)

|    |                                                        |     |     |     |     |     |     |
|----|--------------------------------------------------------|-----|-----|-----|-----|-----|-----|
| 03 | Geometric displacement, see “Technical data” on page 6 | 023 | 032 | 045 | 063 | 080 | 107 |
|----|--------------------------------------------------------|-----|-----|-----|-----|-----|-----|

Series

|    |                   |    |
|----|-------------------|----|
| 04 | Series 1, index 0 | 10 |
|----|-------------------|----|

Configuration of port and fastening threads

|    |                                                                       |   |
|----|-----------------------------------------------------------------------|---|
| 05 | Metric, port threads with profiled sealing ring according to DIN 3852 | N |
|----|-----------------------------------------------------------------------|---|

Direction of rotation<sup>1)</sup>

|    |                       |                   |   |
|----|-----------------------|-------------------|---|
| 06 | Viewed on drive shaft | counter-clockwise | L |
|----|-----------------------|-------------------|---|

Sealing material

|    |                                                                   |   |
|----|-------------------------------------------------------------------|---|
| 07 | FKM (fluorocarbon rubber) including the 2 shaft seal rings in FKM | W |
|----|-------------------------------------------------------------------|---|

Mounting flange

|    |                                           |    |
|----|-------------------------------------------|----|
| 08 | Special flange ISO 7653-1985 (for trucks) | K0 |
|----|-------------------------------------------|----|

Drive shaft

|    |                                                  |    |
|----|--------------------------------------------------|----|
| 09 | Splined shaft similar to DIN ISO 14 (for trucks) | E8 |
|----|--------------------------------------------------|----|

Service line port

|    |                                              |   |
|----|----------------------------------------------|---|
| 10 | Threaded ports <b>A</b> and <b>S</b> at rear | 1 |
|----|----------------------------------------------|---|

Standard / special version

|    |                  |   |
|----|------------------|---|
| 11 | Standard version | 0 |
|    | Special version  | S |

Notice

- Note the project planning notes on page 24!
- In addition to the type code, please specify the relevant technical data when placing your order.
- Please note that not all type code combinations are available even if the individual functions are marked as available.

<sup>1)</sup> Changing the direction of rotation see operating instructions  
91520-01-B, chapter 6.4.2

## Hydraulic fluid

The axial piston unit is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluid selection, behavior during operation as well as disposal and environmental protection should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids.
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)
- ▶ 90225: Limited technical data for operation with waterfree and water-containing fire-resistant hydraulic fluids (HFDR, HFDU, HFA, HFB, HFC, HFC-E)

### Selection of hydraulic fluid

Bosch Rexroth evaluates hydraulic fluids on the basis of the Fluid Rating according to the technical data sheet 90235.

Hydraulic fluids with positive evaluation in the Fluid Rating are provided in the following technical data sheet:

- ▶ 90245: Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)

Selection of hydraulic fluid shall make sure that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$ ; see selection diagram).


### Notice

The axial piston unit is not suitable for operation with water-containing HF hydraulic fluids.

### Viscosity and temperature of hydraulic fluids

|                             | Viscosity                                                                                      | Shaft seal | Temperature <sup>2)</sup>                        | Comment                                                                                                                                                                                                     |
|-----------------------------|------------------------------------------------------------------------------------------------|------------|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cold start                  | $v_{max} \leq 1600 \text{ mm}^2/\text{s}$                                                      | FKM        | $\vartheta_{St} \geq -25 \text{ }^\circ\text{C}$ | $t \leq 3 \text{ min}$ , without load ( $p \leq 50 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$<br>Permissible temperature difference between axial piston unit and hydraulic fluid in the system maximum 25 K |
| Warm-up phase               | $v = 1600 \dots 400 \text{ mm}^2/\text{s}$                                                     |            |                                                  | $t \leq 15 \text{ min}$ , $p \leq 0.7 \times p_{nom}$ and $n \leq 0.5 \times n_{nom}$                                                                                                                       |
| Permissible operating range | $v = 400 \dots 10 \text{ mm}^2/\text{s}^{1)}$<br>$v_{opt} = 36 \dots 16 \text{ mm}^2/\text{s}$ | FKM        | $\vartheta \leq +103 \text{ }^\circ\text{C}$     | measured at port <b>R</b><br>Optimal operating viscosity and efficiency range                                                                                                                               |
| Short-term operation        | $v_{min} = 10 \dots 7 \text{ mm}^2/\text{s}$                                                   | FKM        | $\vartheta \leq +103 \text{ }^\circ\text{C}$     | $t \leq 3 \text{ min}$ , $p \leq 0.3 \times p_{nom}$ , measured at port <b>R</b>                                                                                                                            |

### ▼ Selection diagram

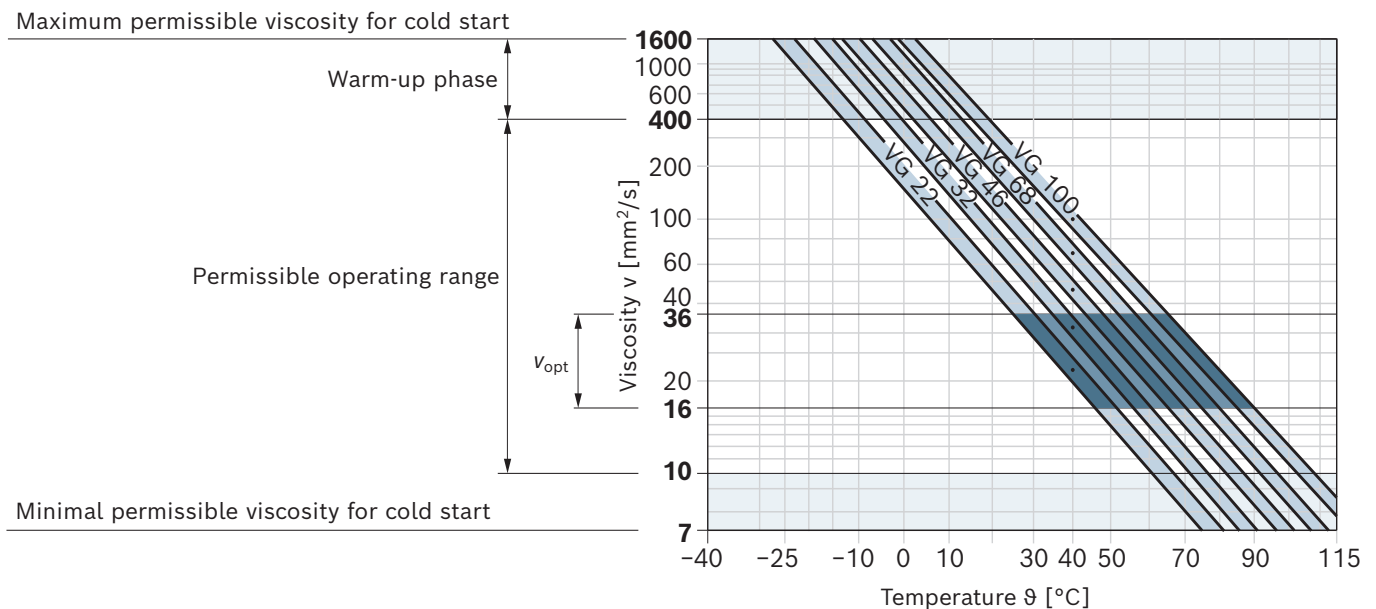

1) This corresponds, for example on the VG 46, to a temperature range of +4 °C bis +85 °C (see selection diagram).

2) If the temperature at extreme operating parameters cannot be adhered to, please contact us.

### **Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At a hydraulic fluid viscosity of less than 10 mm<sup>2</sup>/s (e.g. due to high temperatures during short-term operation) a cleanliness level of at least 19/17/14 according to ISO 4406 is required.


Examples of temperatures of hydraulic fluids at a viscosity of 10 mm<sup>2</sup>/s at:

- ▶ 73 °C bei HLP 32
- ▶ 85 °C bei HLP 46

## Operating pressure range

| Pressure at service line port A (high-pressure side) |                  | Definition                                                                                                                                                                                        |
|------------------------------------------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Nominal pressure $p_{nom}$                           | 350 bar          | The nominal pressure corresponds to the maximum design pressure.                                                                                                                                  |
| Maximum pressure $p_{max}$                           | 400 bar          | The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.        |
| Single operating period                              | 5 s              |                                                                                                                                                                                                   |
| Total operating period                               | 50 h             |                                                                                                                                                                                                   |
| Minimum pressure (high-pressure side)                | 10 bar           | Minimum pressure at the high-pressure side (A) which is required in order to prevent damage to the axial piston unit.                                                                             |
| Rate of pressure change $R_{A\ max}$                 | 9000 bar/s       | Maximum permissible rate of pressure rise and reduction during a pressure change over the entire pressure range.                                                                                  |
| Pressure at suction port S (inlet)                   |                  |                                                                                                                                                                                                   |
| Minimum pressure $p_{S\ min}$                        | 0.8 bar absolute | Minimum pressure at suction port <b>S</b> (inlet) which is required in order to prevent damage to the axial piston unit. The minimum pressure is dependent on the speed of the axial piston unit. |
| Maximum pressure $p_{S\ max}$                        | 2 bar absolute   |                                                                                                                                                                                                   |


### ▼ Rate of pressure change $R_{A\ max}$

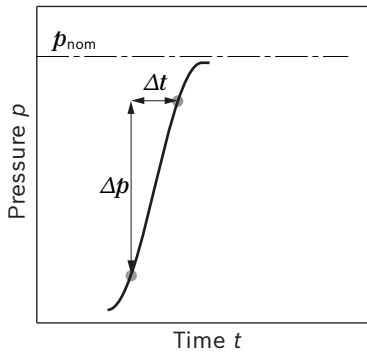

### Notice

- Operating pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.
- In addition to the hydraulic fluid and the temperature, the service life of the shaft seal is influenced by the rotational speed of the axial piston unit and the case pressure.

### ▼ Pressure definition

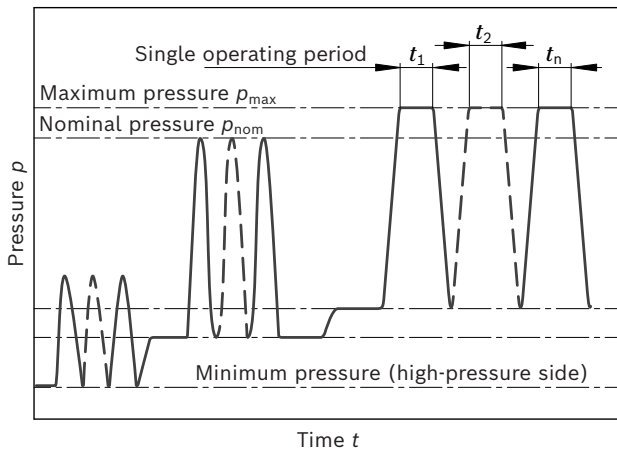


$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

## Technical data

| Size                                   | NG                                    |                  | 23     | 32     | 45    | 63     | 80     | 107    |
|----------------------------------------|---------------------------------------|------------------|--------|--------|-------|--------|--------|--------|
| Geometric displacement, per revolution | $V_g$                                 | cm <sup>3</sup>  | 22.9   | 32     | 45.6  | 63     | 80.4   | 106.7  |
| Rotational speed maximum <sup>1)</sup> | $n_{nom}^{2)}$                        | rpm              | 3050   | 2750   | 2650  | 2200   | 2150   | 2000   |
|                                        | $n_{max}^{3)}$                        | rpm              | 4300   | 3900   | 3800  | 3200   | 3100   | 2800   |
| Flow                                   | at $n_{nom}$                          | $q_v$            | l/min  | 70     | 88    | 121    | 139    | 213    |
| Power                                  | at $n_{nom}$ and $\Delta p = 350$ bar | $P$              | kW     | 41     | 51    | 71     | 81     | 124    |
| Torque                                 | at $\Delta p = 350$ bar               | $M$              | Nm     | 127    | 178   | 254    | 351    | 594    |
| Rotary stiffness                       | $c$                                   | kNm/rad          | 2.56   | 3.12   | 4.18  | 6.25   | 8.73   | 11.2   |
| Moment of inertia for rotary group     | $J_{TW}$                              | kgm <sup>2</sup> | 0.0012 | 0.0012 | 0.003 | 0.0042 | 0.0072 | 0.0116 |
| Case volume                            | $V$                                   | l                | 0.25   | 0.29   | 0.4   | 0.5    | 0.6    | 0.75   |
| Mass moment                            | $M_G$                                 | Nm               | 4.7    | 4.7    | 8.6   | 9.9    | 15.3   | 20     |
| Weight approx.                         | $m$                                   | kg               | 5.9    | 5.9    | 8.4   | 9.3    | 12.3   | 15.0   |

### ▼ Maximum speed (limiting speed)

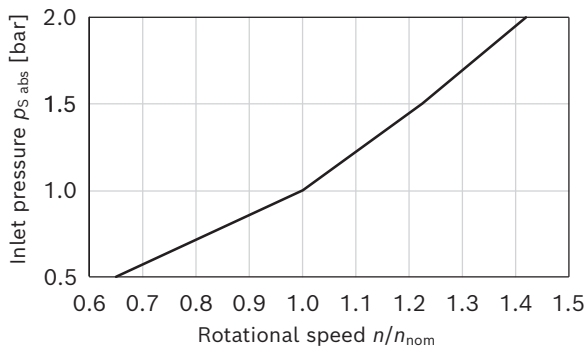

#### Notice

- Theoretical values, without efficiency and tolerances; values rounded.
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit.
- Technical data regarding torsional vibrations on request.

### Determination of the operating characteristics

|        |                                                                                             |         |
|--------|---------------------------------------------------------------------------------------------|---------|
| Flow   | $q_v = \frac{V_g \times n \times \eta_v}{1000}$                                             | [l/min] |
| Torque | $M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$                            | [Nm]    |
| Power  | $P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$ | [kW]    |

#### Key

- $V_g$  Displacement per revolution [cm<sup>3</sup>]
- $\Delta p$  Differential pressure [bar]
- $n$  Rotational speed in [rpm]
- $\eta_v$  Volumetric efficiency
- $\eta_{hm}$  Hydraulic-mechanical efficiency
- $\eta_t$  Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ )

- The values are applicable:
  - for the optimum viscosity range from  $\nu_{opt} = 36$  to  $16$  mm<sup>2</sup>/s
  - for hydraulic fluids based on mineral oils
- The values apply at absolute pressure  $p_{abs} = 1$  bar at suction port **S**.
- Maximum speed (speed limit) with increased inlet pressure  $p_{abs}$  at suction port **S** (see diagram).

Permissible axial forces of the drive shaft

| Size                                                             |                                                                                   | NG                | 23 | 32 | 45 | 63 | 80 | 107 |
|------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------|----|----|----|----|----|-----|
| Maximum axial force,<br>at standstill or pressure-free operation |  | + $F_{ax \max}$ N | 0  | 0  | 0  | 0  | 0  | 0   |
|                                                                  |                                                                                   | - $F_{ax \max}$ N | 24 | 33 | 43 | 53 | 60 | 71  |

**Notice**

- ▶ The values given are maximum values and do not apply to continuous operation.
- ▶ The permissible axial force in direction  $-F_{ax}$  is to be avoided as the lifetime of the bearing is reduced.
- ▶ Radial forces are not permissible.

## Direction of rotation

The direction of rotation of the axial piston unit is defined by means of a pressure connection screwed into the service line port and can easily be changed.

By changing the pressure connection, the service line port and the suction port are exchanged. As a result, the permissible drive direction is changed. This is necessary when mounting on a power take-off with counter-clockwise rotation, for example. The procedure for conversion of the pressure nipple can be found in the operating instructions (91520-01-B, chapter 6.4.2 “Direction of rotation and change of direction of rotation”).


### Direction of rotation on delivery

On delivery, the pressure connection (1) is pre-assembled in the right-hand service line port of the axial piston unit. The permissible drive direction of the pump looking at the drive shaft: counter-clockwise.

The power take-off turns clockwise.

#### Notice


The pressure connection is pre-installed upon delivery and must be tightened with the torque stipulated for the appropriate thread size prior to installation (see operating instructions).

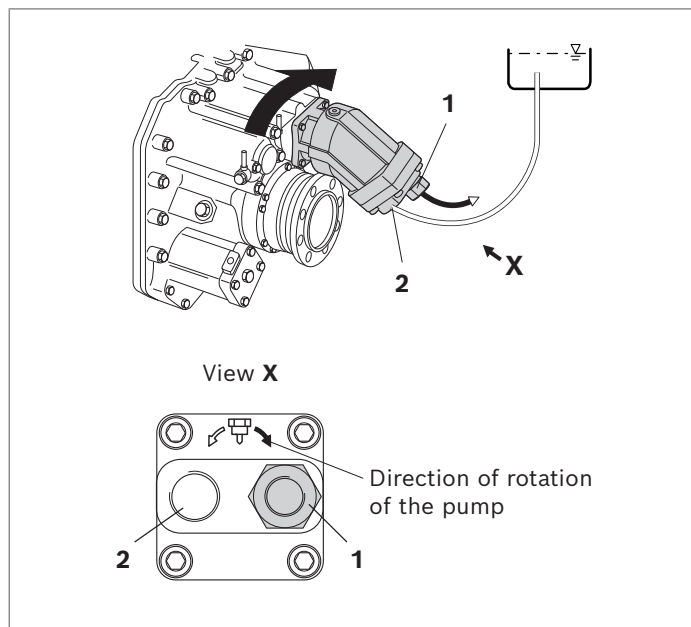

#### Legende

- 1 Pressure connection (in right port)
- 2 Suction port S

### Dimensions size 23, 32

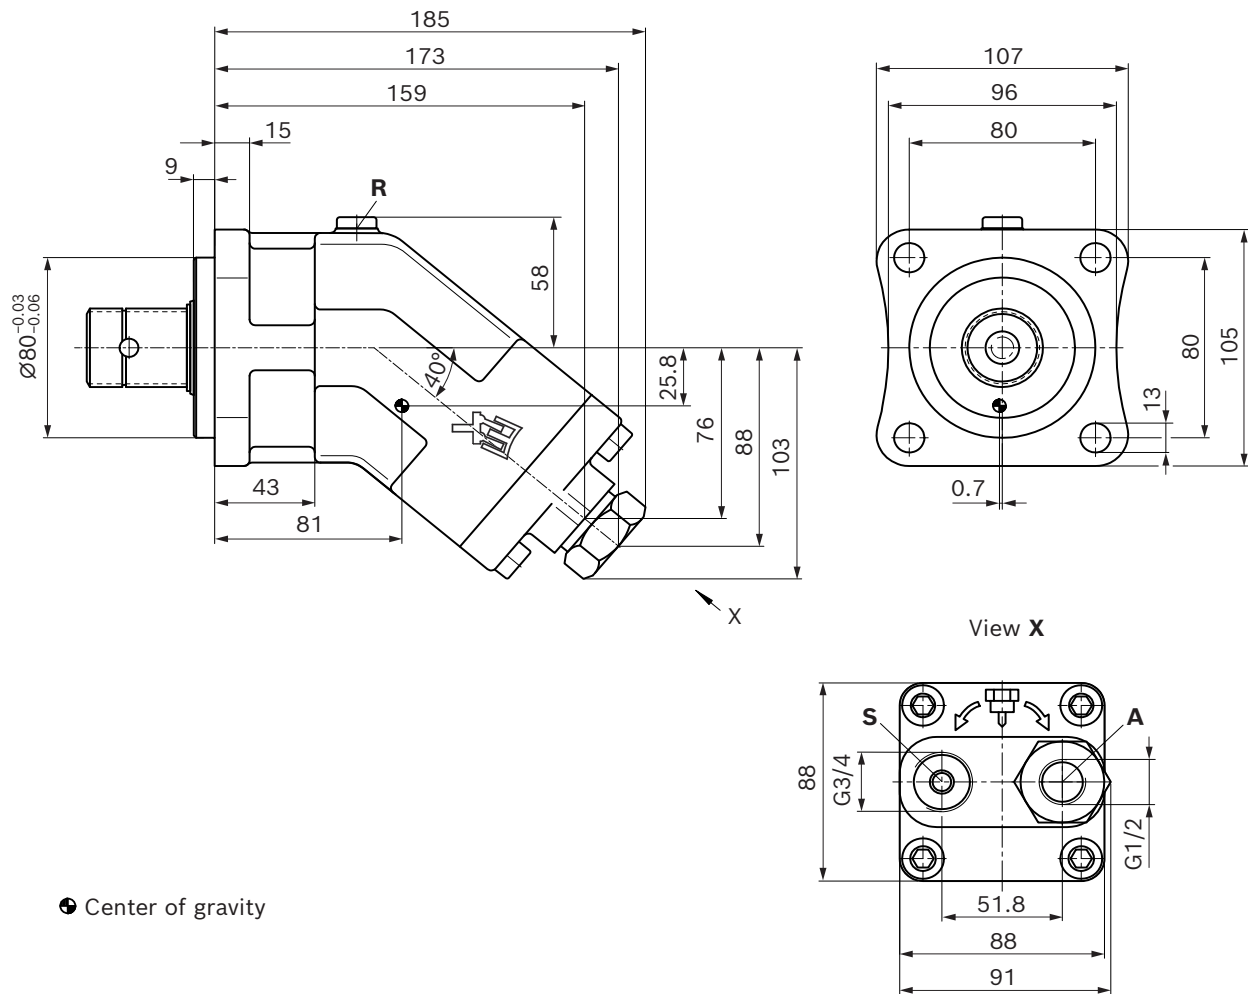

| Ports |                | Standard               | Size            | $p_{\max}$ [bar] <sup>1)</sup> | State <sup>4)</sup> |
|-------|----------------|------------------------|-----------------|--------------------------------|---------------------|
| A     | Working port   | DIN ISO 228            | G1/2; 14 deep   | 400                            | O                   |
| S     | Suction port   | DIN ISO 228            | G3/4; 16 deep   | 2                              | O                   |
| R     | Air bleed port | DIN 3852 <sup>2)</sup> | M10 × 1; 8 deep | 2                              | X <sup>3)</sup>     |

- 1) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

2) The countersink may be deeper than specified in the standard.


3) Only open port **R** for filling and air bleeding.

4) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)

▼ **Splined shaft similar to DIN ISO 14**


**E8** – 8×32×35

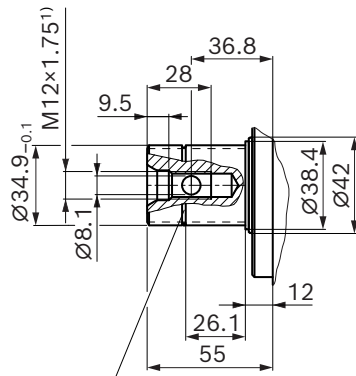

Groove for retaining ring 35 × 1.5 DIN 471

<sup>1)</sup> Zentrierbohrung nach DIN 332 (Gewinde nach DIN 13)

Dimensions size 45

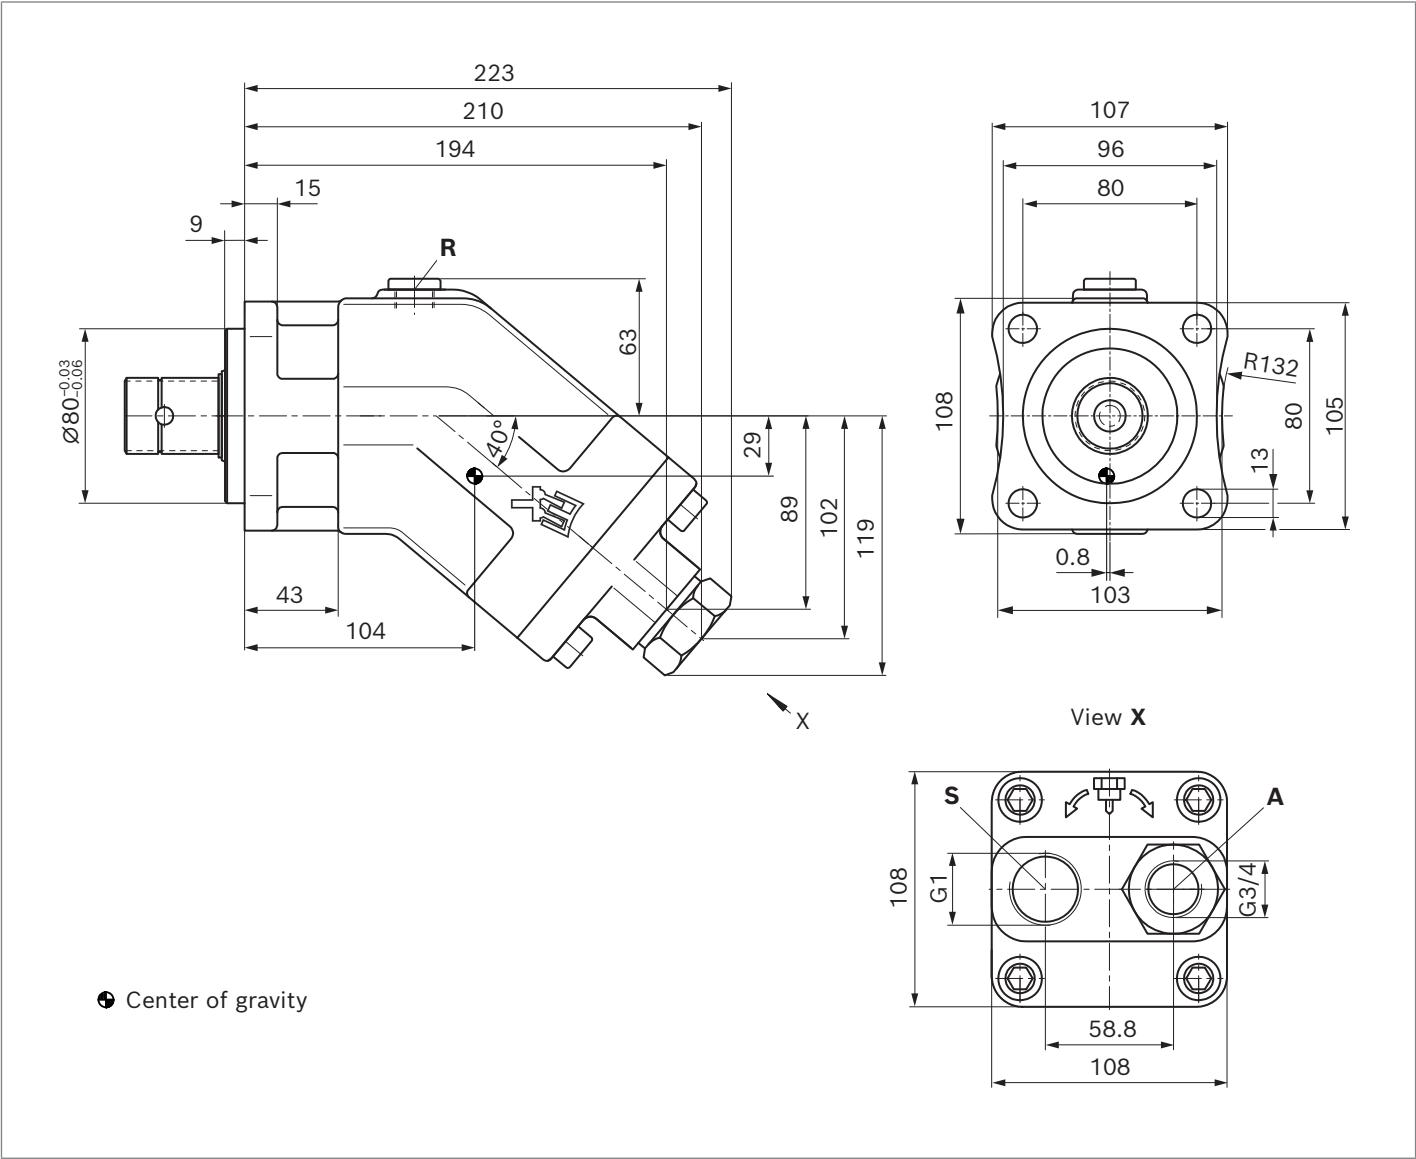

| Ports |                | Standard               | Size            | $p_{max}$ [bar] <sup>1)</sup> | State <sup>4)</sup> |
|-------|----------------|------------------------|-----------------|-------------------------------|---------------------|
| A     | Working port   | DIN ISO 228            | G3/4; 16 deep   | 400                           | O                   |
| S     | Suction port   | DIN ISO 228            | G1; 18 deep     | 2                             | O                   |
| R     | Air bleed port | DIN 3852 <sup>2)</sup> | M10 × 1; 8 deep | 2                             | X <sup>3)</sup>     |

1) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.


2) The countersink may be deeper than specified in the standard.

3) Only open port **R** for filling and air bleeding.

4) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)


▼ **Splined shaft similar to DIN ISO 14**

**E8** – 8×32×35

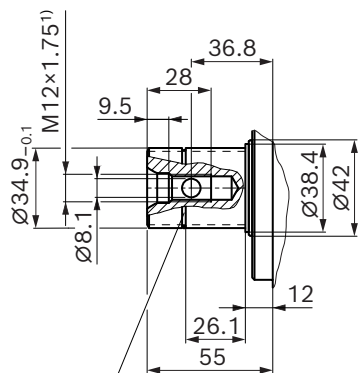

Groove for retaining ring 35 × 1.5 DIN 471

<sup>1)</sup> Zentrierbohrung nach DIN 332 (Gewinde nach DIN 13)

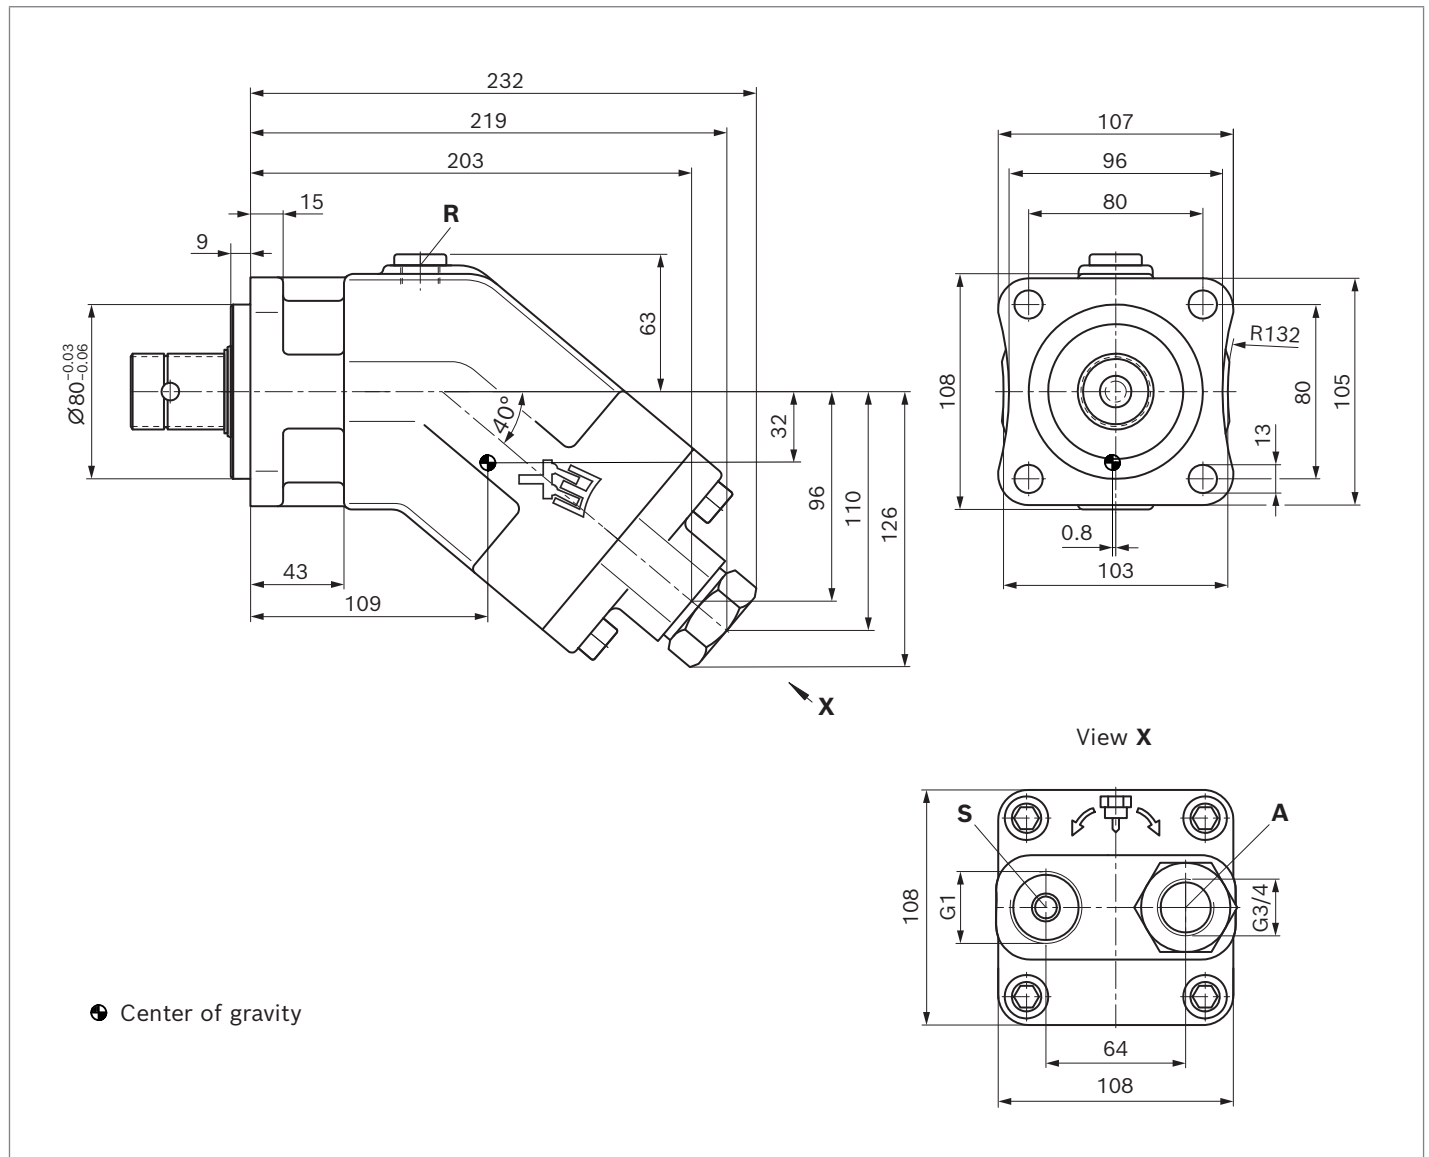**Dimensions size 63**

| Ports    |                | Standard               | Size            | $p_{\max}$ [bar] <sup>1)</sup> | State <sup>4)</sup> |
|----------|----------------|------------------------|-----------------|--------------------------------|---------------------|
| <b>A</b> | Working port   | DIN ISO 228            | G3/4; 16 deep   | 400                            | O                   |
| <b>S</b> | Suction port   | DIN ISO 228            | G1; 18 deep     | 2                              | O                   |
| <b>R</b> | Air bleed port | DIN 3852 <sup>2)</sup> | M10 × 1; 8 deep | 2                              | X <sup>3)</sup>     |

1) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

2) The countersink may be deeper than specified in the standard.


3) Only open port **R** for filling and air bleeding.

4) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)

▼ **Splined shaft similar to DIN ISO 14**


**E8** – 8×32×35

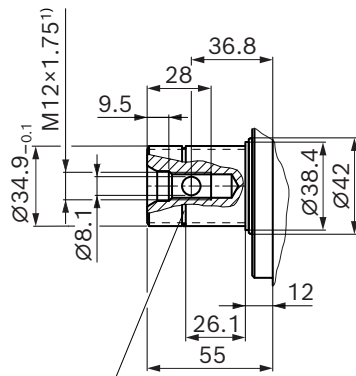

Groove for retaining ring 35 × 1.5 DIN 471

<sup>1)</sup> Zentrierbohrung nach DIN 332 (Gewinde nach DIN 13)

## Dimensions size 80

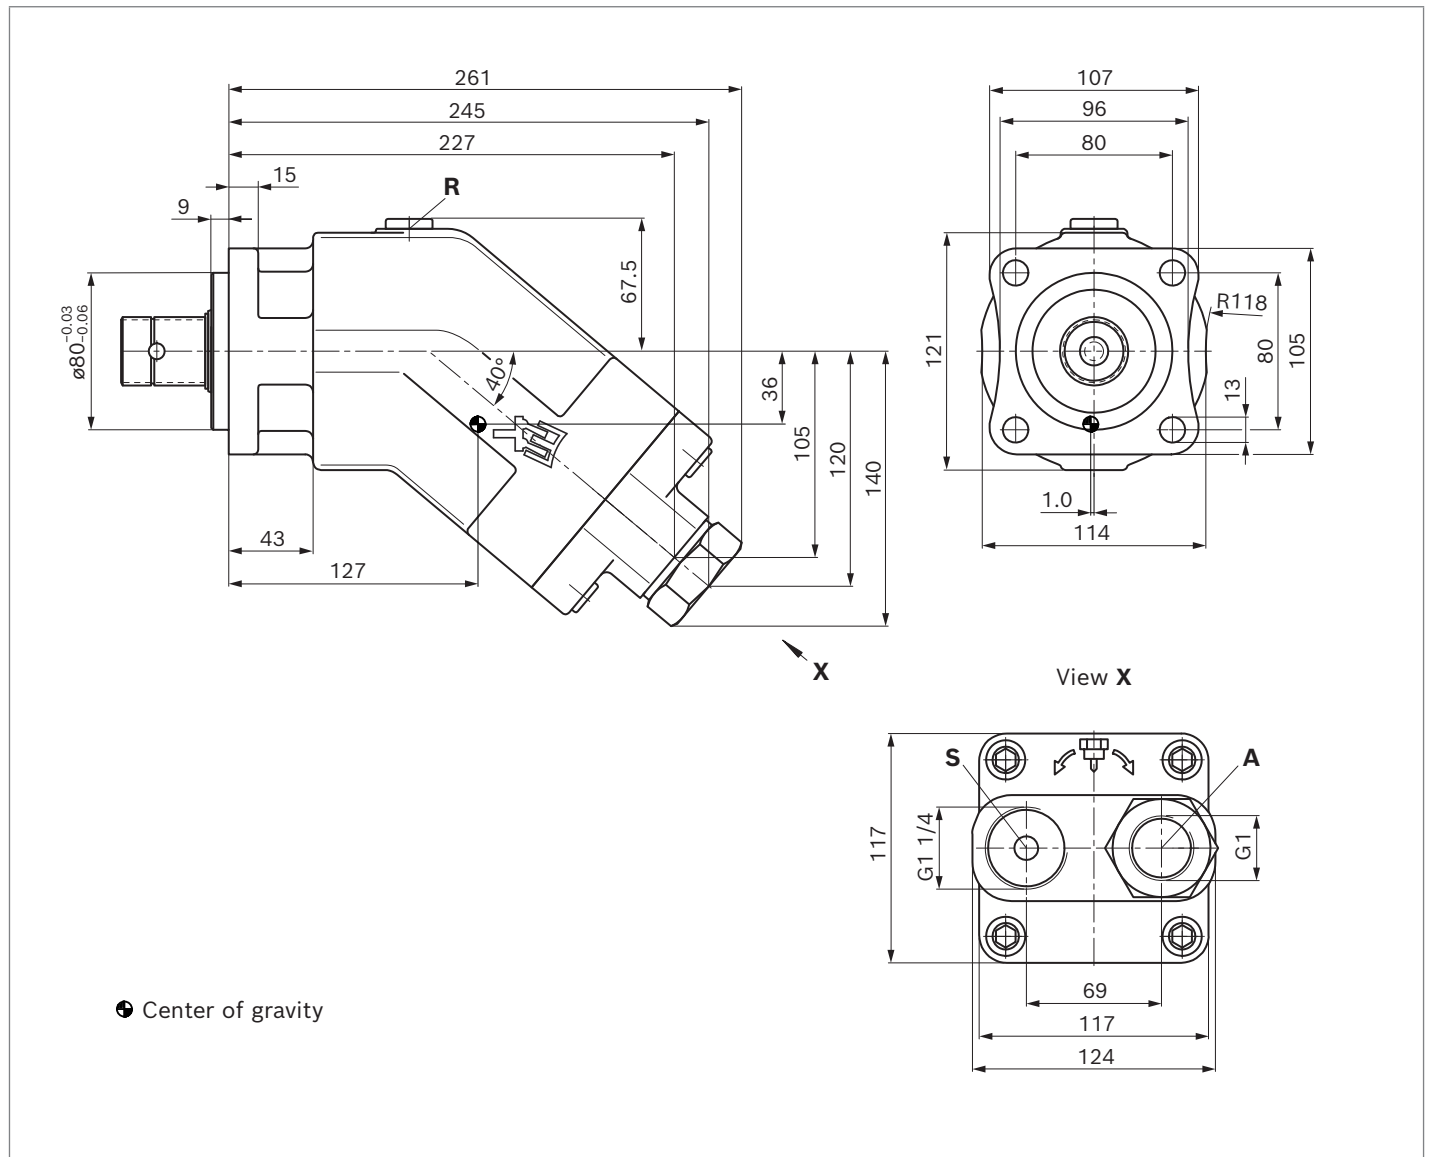

| Ports |                | Standard               | Size            | $p_{\max}$ [bar] <sup>1)</sup> | State <sup>4)</sup> |
|-------|----------------|------------------------|-----------------|--------------------------------|---------------------|
| A     | Working port   | DIN ISO 228            | G1; 18 deep     | 400                            | O                   |
| S     | Suction port   | DIN ISO 228            | G1 1/4; 20 deep | 2                              | O                   |
| R     | Air bleed port | DIN 3852 <sup>2)</sup> | M10 × 1; 8 deep | 2                              | X <sup>3)</sup>     |

- 1) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

2) The countersink may be deeper than specified in the standard.


3) Only open port **R** for filling and air bleeding.

4) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)

▼ **Splined shaft similar to DIN ISO 14**


**E8** – 8×32×35

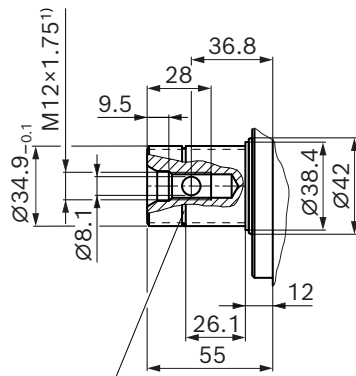

Groove for retaining ring 35 × 1.5 DIN 471

<sup>1)</sup> Zentrierbohrung nach DIN 332 (Gewinde nach DIN 13)

## Dimensions size 107

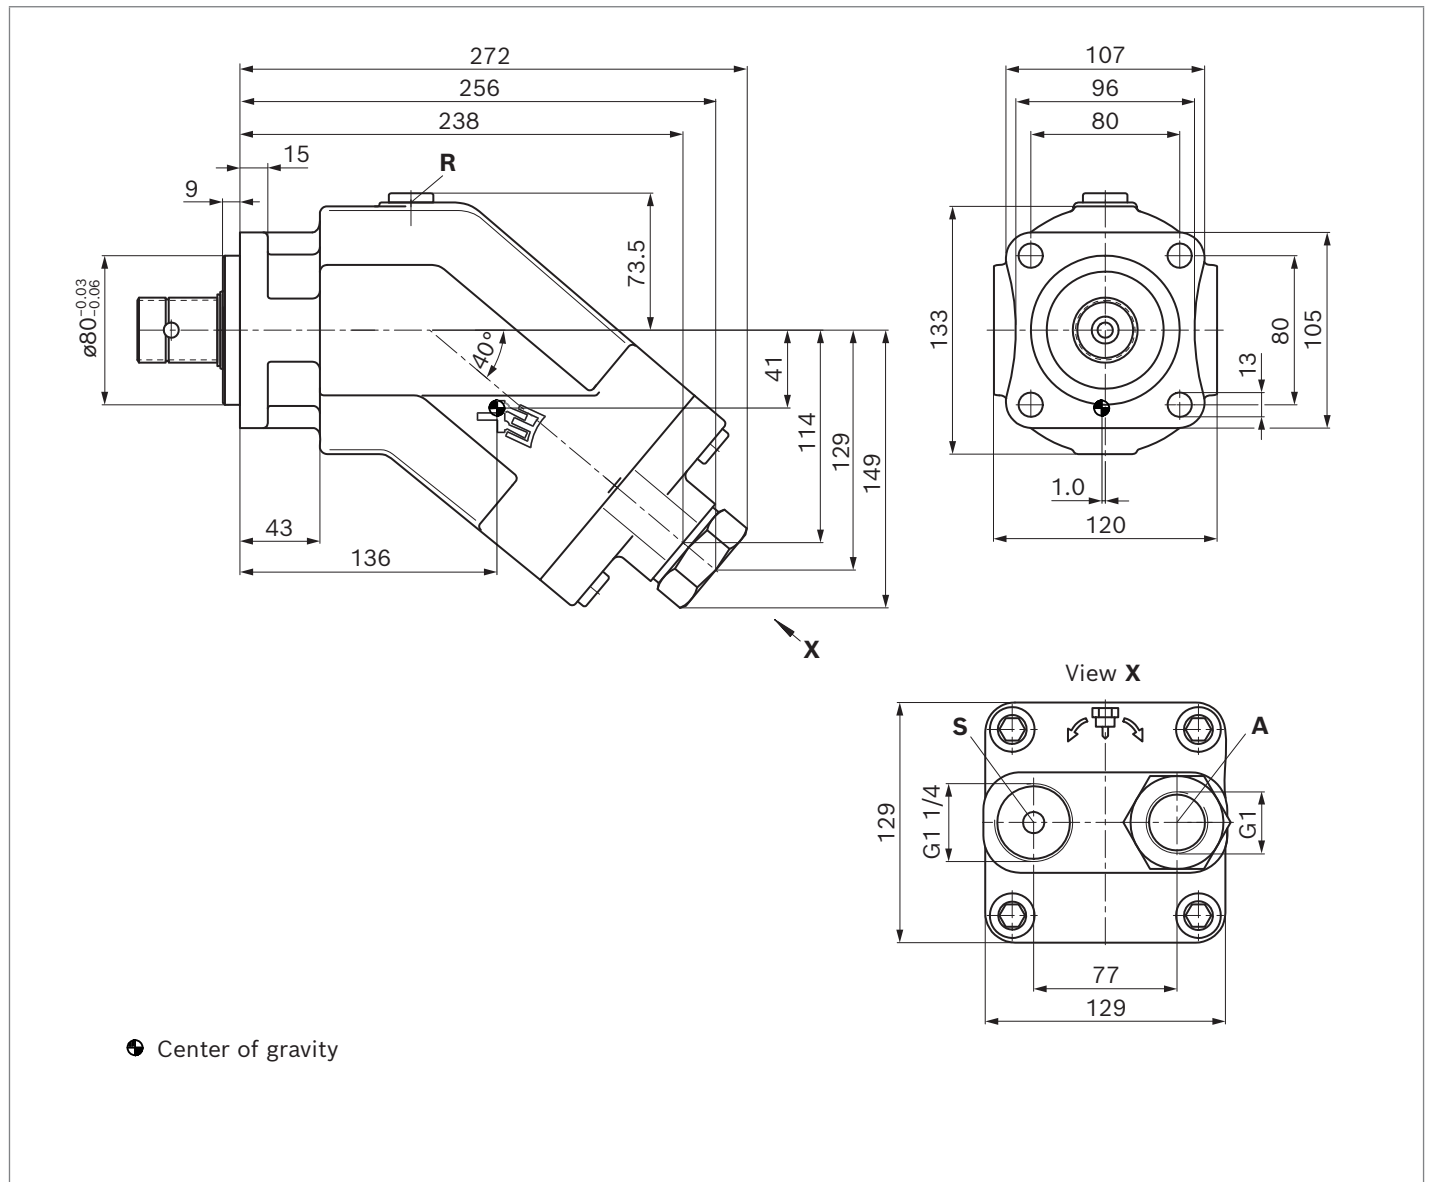

| Ports    |                | Standard               | Size            | $p_{\max}$ [bar] <sup>1)</sup> | State <sup>4)</sup> |
|----------|----------------|------------------------|-----------------|--------------------------------|---------------------|
| <b>A</b> | Working port   | DIN ISO 228            | G1; 18 deep     | 400                            | O                   |
| <b>S</b> | Suction port   | DIN ISO 228            | G1 1/4; 20 deep | 2                              | O                   |
| <b>R</b> | Air bleed port | DIN 3852 <sup>2)</sup> | M10 × 1; 8 deep | 2                              | X <sup>3)</sup>     |

1) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

2) The countersink may be deeper than specified in the standard.


3) Only open port **R** for filling and air bleeding.

4) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


▼ **Splined shaft similar to DIN ISO 14**

**E8** – 8×32×35

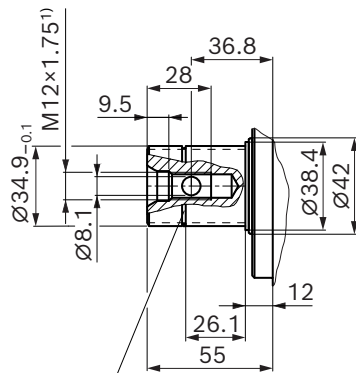

Groove for retaining ring 35 × 1.5 DIN 471

<sup>1)</sup> Zentrierbohrung nach DIN 332 (Gewinde nach DIN 13)

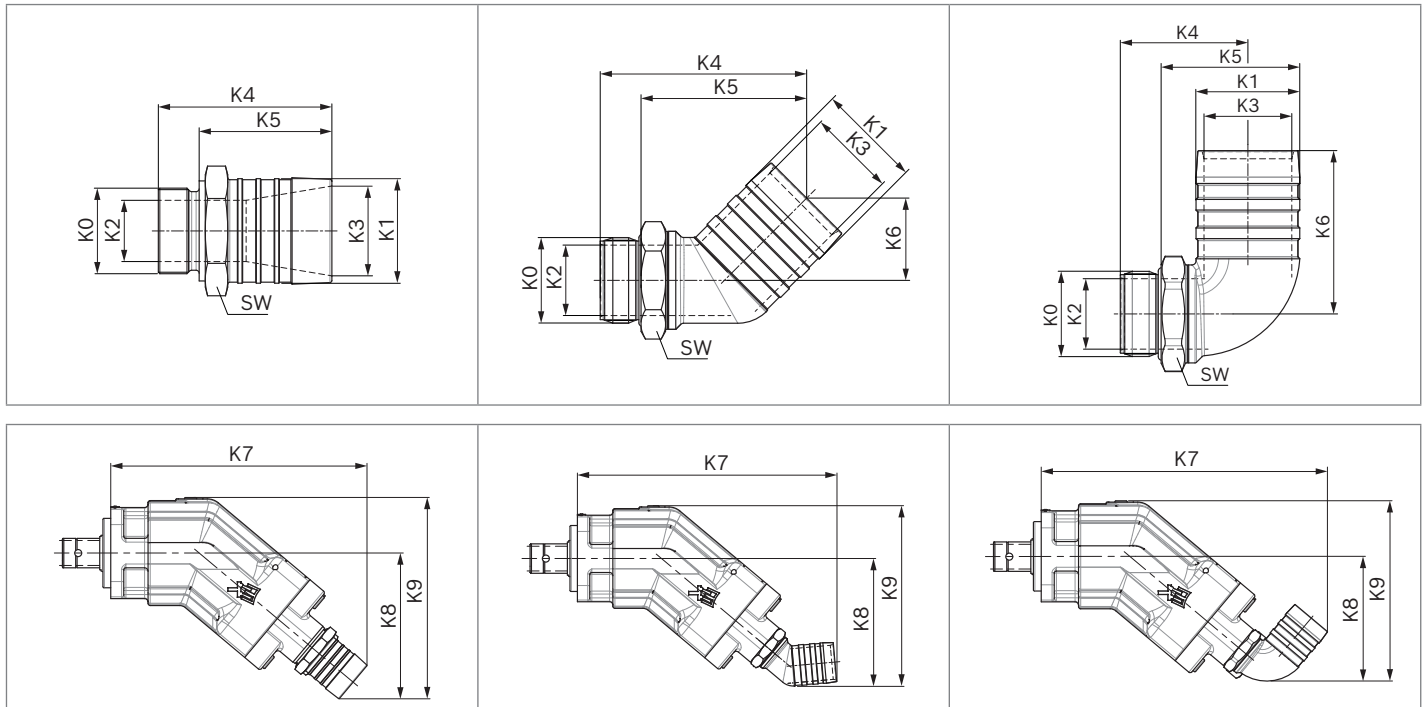**Accessories**▼ **Dimensions of suction adapters**

| Version  | Pump size | Hose nominal width | Material number | Thread K0 | K1 | K2   | K3   | K4  | K5 | K6 | K7  | K8  | K9  | SW |
|----------|-----------|--------------------|-----------------|-----------|----|------|------|-----|----|----|-----|-----|-----|----|
| Straight | 23, 32    | 1 1/2"             | R909831856      | G3/4      | 39 | 18   | 33.5 | 70  | 54 | –  | 221 | 132 | 186 | 41 |
|          | 45        | 1 1/2"             | R902600251      | G1        | 39 | 23.5 | 33.5 | 72  | 54 | –  | 248 | 139 | 197 | 41 |
|          | 63        | 1 1/2"             |                 | G1        | 39 | 23.5 | 33.5 | 72  | 54 | –  | 257 | 146 | 204 | 41 |
|          | 63        | 2"                 | R902602028      | G1        | 51 | 26   | 44   | 82  | 64 | –  | 268 | 157 | 215 | 55 |
|          | 80        | 2"                 | R902600252      | G1 1/4    | 51 | 30   | 44   | 85  | 65 | –  | 295 | 168 | 232 | 55 |
|          | 107       | 2"                 |                 | G1 1/4    | 51 | 30   | 44   | 85  | 65 | –  | 306 | 177 | 245 | 55 |
|          | 107       | 2 1/2"             | R902601630      | G1 1/4    | 63 | 31   | 54   | 82  | 64 | –  | 308 | 180 | 248 | 65 |
| 45°      | 23, 32    | 1 1/2"             | R909831601      | G3/4      | 39 | 20   | 31   | 101 | 82 | 43 | 259 | 126 | 180 | 36 |
|          | 45        | 1 1/2"             | R909831600      | G1        | 39 | 26   | 31   | 101 | 82 | 45 | 287 | 132 | 190 | 41 |
|          | 63        | 1 1/2"             |                 | G1        | 39 | 26   | 31   | 101 | 82 | 45 | 296 | 139 | 197 | 41 |
|          | 63        | 2"                 | R902602029      | G1        | 51 | 26   | 43   | 100 | 81 | 44 | 295 | 145 | 203 | 41 |
|          | 80        | 2"                 | R909831597      | G1 1/4    | 51 | 34   | 43   | 101 | 81 | 40 | 317 | 156 | 220 | 50 |
|          | 107       | 2"                 |                 | G1 1/4    | 51 | 34   | 43   | 101 | 81 | 40 | 328 | 165 | 234 | 50 |
|          | 107       | 2 1/2"             | R902601631      | G1 1/4    | 63 | 35   | 54   | 100 | 81 | 44 | 331 | 169 | 237 | 50 |
| 90°      | 23, 32    | 1 1/2"             | R909831602      | G3/4      | 39 | 20   | 31   | 62  | 43 | 81 | 265 | 117 | 171 | 36 |
|          | 45        | 1 1/2"             | R909831599      | G1        | 39 | 26   | 31   | 64  | 44 | 85 | 296 | 127 | 185 | 41 |
|          | 63        | 1 1/2"             |                 | G1        | 39 | 26   | 31   | 64  | 44 | 85 | 305 | 134 | 192 | 41 |
|          | 63        | 2"                 | R902602030      | G1        | 51 | 26   | 43   | 62  | 42 | 81 | 305 | 138 | 196 | 41 |
|          | 80        | 2"                 | R909831598      | G1 1/4    | 51 | 35   | 43   | 63  | 43 | 80 | 330 | 144 | 208 | 50 |
|          | 107       | 2"                 |                 | G1 1/4    | 51 | 35   | 43   | 63  | 43 | 80 | 341 | 153 | 221 | 50 |

**Notice**

The suction adapter is not included in the scope of delivery and must be ordered separately.

### **Notices regarding the suction line**

- ▶ Keep as short and straight as possible, without bend
- ▶ Use a supporting ring for plastic hoses.
- ▶ Use two hose clamps to protect the suction hose against air suction.
- ▶ Notice pressure resistance of suction hose against ambient pressure.

### **Replacing seals**

The O-rings used as seals against air ingress into the suction line must be replaced after every disassembly or reinstallation to ensure a complete sealing.

Material number for O-rings:

- ▶ R909083796: O-Ring für Saugstutzen G3/4
- ▶ R909083802: O-Ring für Saugstutzen G1
- ▶ R909083808: O-Ring für Saugstutzen G1 1/4

**Coupling flange**


There are special, modified coupling flanges in 4-hole and 6-hole design for the cardan shaft drive.

The coupling flange is not included in the scope of delivery and must be ordered separately.


**Notice**

- ▶ Assembly of the coupling flange is carried out by pulling it onto the drive shaft using the threaded bore in the drive shaft end.
- ▶ The coupling flange must be clamped on the drive shaft using a socket-head screw. In addition, permanent lubrication should be applied between the drive shaft and the coupling flange.
- ▶ The socket-head screw must be secured in a suitable manner (e.g. gluing with Loctite 276) and tightened with a tightening torque of 130 Nm.
- ▶ Sudden axial impact upon the drive shaft will lead to rotary group damage and therefore must be avoided.

▼ **4-hole coupling flange, complete – Ø90**  
**Material number: R902060152**

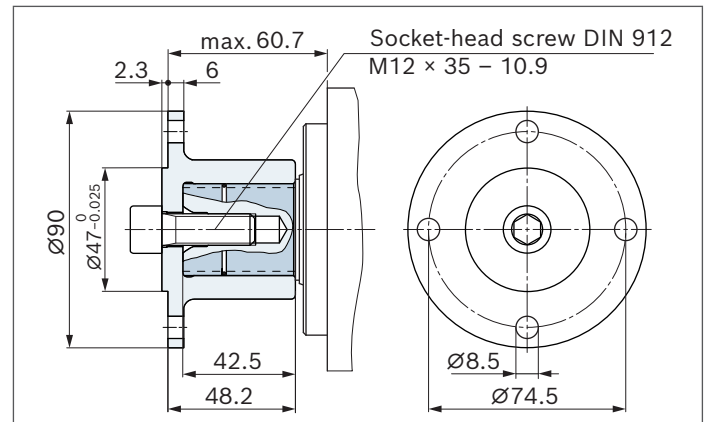

▼ **6-hole coupling flange, complete – Ø100**  
**Material number: R902060153**

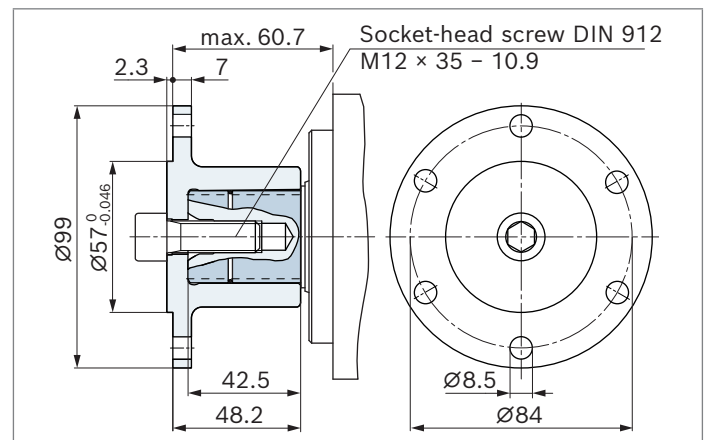

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be adhered to following a longer standstill as the axial piston unit may empty via the hydraulic lines. The pump housing is internally connected to the suction chamber. A separate drain line from the housing to the reservoir is not required.

To prevent the transmission of structure-borne noise, use elastic elements to decouple all connecting lines from all vibration-capable components (e.g. reservoir, frame parts). Under all operating conditions, the suction line must enter the reservoir below the minimum fluid level. The permissible suction height  $h_S$  results from the total pressure loss, it must not, however, be higher than  $h_{S\ max} = 800\text{ mm}$ . The minimum suction pressure at port S must not fall below 0.8 bar absolute during operation and during cold start.

### Installation position

See the following examples **1** to **4**. Further installation positions are available upon request. Recommended installation position: **1** and **2**.

Notice


Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

| Key          |                                                       |
|--------------|-------------------------------------------------------|
| <b>F</b>     | Filling / air bleeding                                |
| <b>R</b>     | Air bleeding                                          |
| <b>S</b>     | Suction port                                          |
| $h_{t\ min}$ | Minimum required immersion depth (200 mm)             |
| $h_{\ min}$  | Minimum required spacing to reservoir bottom (100 mm) |
| $h_{S\ max}$ | Maximum permissible suction height (800 mm)           |


### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

#### ▼ Installation position 1

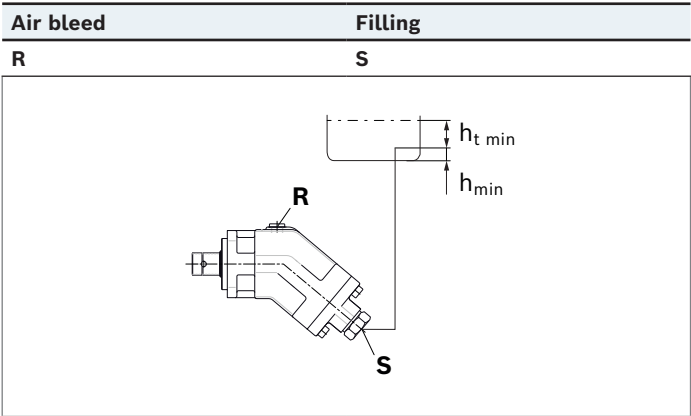

#### ▼ Installation position 2

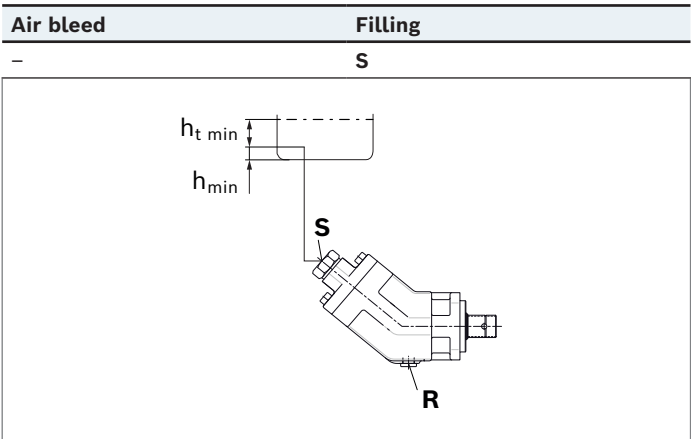


**Above-reservoir installation**

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.


Observe the maximum permissible suction height

$h_{S \max} = 800 \text{ mm}$ .

▼ **Installation position 3**

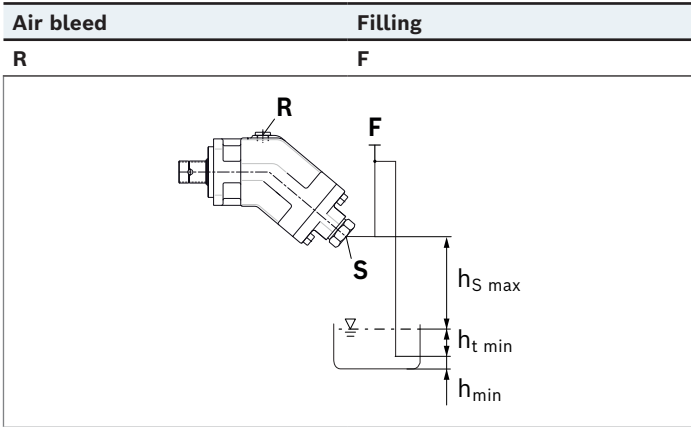

▼ **Installation position 4**

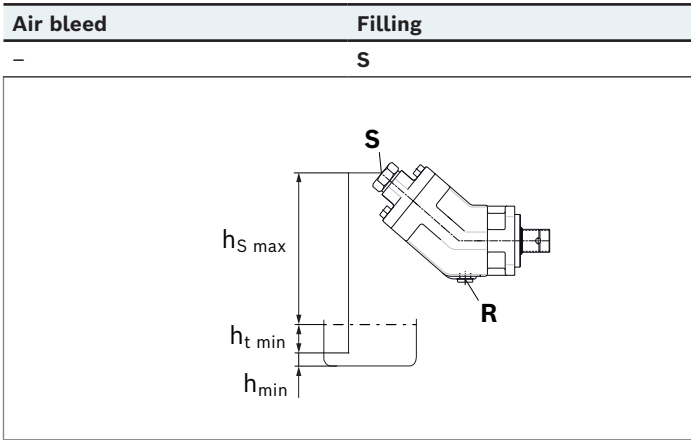

## Project planning notes

- ▶ The pump is designed to be used in open circuits.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding operating instructions completely and thoroughly. If necessary, this can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or in the operating instructions.
- ▶ Not all versions of the product are approved for use in a safety function according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g. MTTF<sub>D</sub>) for functional safety.
- ▶ Be sure to add a pressure relief valve to the hydraulic system. Observe the technical limits of the pressure relief valves here.
- ▶ Please note that a hydraulic system is an oscillating system. This can lead, for example, to the stimulation the natural frequency within the hydraulic system during operation at constant rotational speed over a longer period of time. The excitation frequency of the pump is 7 times the rotational speed frequency. This can be prevented, for example, with suitably designed hydraulic lines.
- ▶ Please note the details regarding the tightening torques of port threads and other threaded joints in the operating instructions.
- ▶ The ports and fastening threads are designed for the permissible pressures  $p_{\max}$  of the respective ports, see the port tables. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- ▶ The working ports and function ports are only intended to accommodate hydraulic lines.

## **Safety instructions**

- During and shortly after operation, there is a risk of burns on the axial piston unit. Take appropriate safety measures (e.g. by wearing protective clothing).

## Related documentation

### Additional pumps with special features and dimensions for use in commercial vehicles

| Document type | Title                              | Document number |
|---------------|------------------------------------|-----------------|
| Data sheet    | Axial piston fixed pump A17FNO     | 91510           |
|               | Axial piston variable pompe A18VO  | 92270           |
|               | Axial piston variable pompe A18VLO | 92280           |

### Product-specific documentation

| Document type          | Title                                          | Document number |
|------------------------|------------------------------------------------|-----------------|
| Operating instructions | Axial piston fixed pump A17FO/A17FNO Series 10 | 91520-01-B      |
| Data sheet             | Storage and preservation of axial piston units | 90312           |

### Documentation for hydraulic fluids

| Document type | Title                                                                                                    | Document number |
|---------------|----------------------------------------------------------------------------------------------------------|-----------------|
| Data sheet    | Hydraulic fluids based on mineral oils and related hydrocarbons                                          | 90220           |
|               | Environmentally acceptable hydraulic fluids                                                              | 90221           |
|               | Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)                                                  | 90222           |
|               | Axial piston units for operation with fire-resistant hydraulic fluids (HFDR, HFDU, HFA, HFB, HFC, HFC-E) | 90225           |
|               | Rating of hydraulic fluids used in Rexroth hydraulic components (pumps and motors)                       | 90235           |
|               | Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)                      | 90245           |

#### Bosch Rexroth AG

Glockeraustraße 2  
89275 Elchingen  
Germany  
Tel. +49 7308 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© Bosch Rexroth AG 2010. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serve to describe the product. As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.