



More information on the website  
[radwag.com/en/info,w1,Q67](http://radwag.com/en/info,w1,Q67)

# WTC 200 Precision Balance



## Functions



Plus/Minus Control



Percent Weighing



Parts counting



Peak hold



GLP Procedures



ALIBI Memory

## Datasheet

### Metrological parameters

Maximum capacity [Max]	200 g
Readability [d]	0,001 g
Tare range	-200 g
Repeatability	0,002 g
Linearity	±0,004 g
Stabilization time	2 s
Adjustment	external

### Physical parameters

Levelling system	manual
------------------	--------

Physical parameters	
Display	LCD (backlit)
Weighing pan dimensions	ø100 mm
Packaging dimensions	330×230×140 mm
Net weight	1,3 kg
Gross weight	2 kg
Protection class	IP 43
Communication interface	
Communication interface	RS232, USB-A, USB-B
Electrical parameters	
Power supply	Adapter: 100 or 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
Operation time on batteries	15 h (average time)
Environmental conditions	
Operating temperature	+15 ÷ +30 °C

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.



## Accessories

RS 232 cables (scale - printer)  
Cigarette lighter receptacle power supply cables  
Receipt Printer



Displays  
RS 232, RS 485 cables

## Software

RAD-KEY  
R Panel  
Scales Editor 2.0

LabVIEW Driver  
R-LAB

## Device dimensions

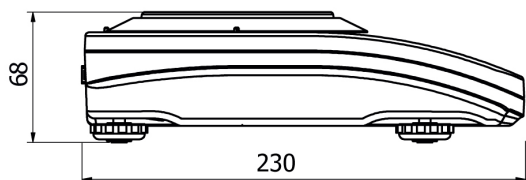

WTC, d = 0.001 g