



# UT and UTR series


M30 cylindrical direct diffuse & retro-reflective Ultrasonic Sensor with Teach-In button



M30 with Teach-In button

## features

- M30 ultrasonic sensor with standard housing and with large front with high performances and high sensing distances
- Adjustable hysteresis function: models with double digital programmable output specific for level detection
- Models with voltage or current output: programmable slope to optimize resolution
- Adjustable working area (window mode or object mode) by Teach-in button on all models for a quick and easy installation
- Two multifunction LEDs: orange LED for adjustment procedure and output type and green LED for target alignment
- Plastic and AISI 316L stainless steel housing, plug M12 or cable exit 4 pin

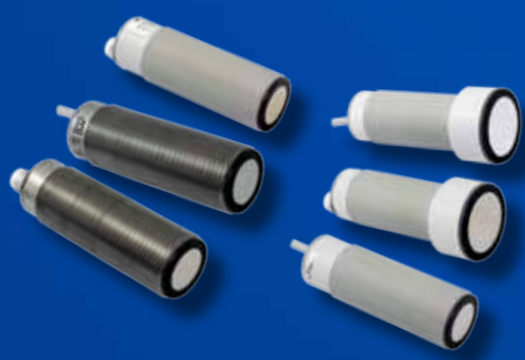

## web contents



- Application notes
- Photos
- Catalogue / Manuals



## code description<sup>(\*)</sup>

	UT	1	B	/	E	1	-	0	E	UL	
series	UT	M30 Ultrasonic Sensor									
function		Direct diffuse models									
	R	Retroreflective models									
housing type	1	Standard housing									
	2	Large front transducer, Ø 38.8 mm									
nominal sensing distance Sn	B	250 - 3,500 mm direct diffuse/350 - 3,500 metallic housing									
	F	350 - 6,000 mm direct diffuse									
adjustment	E	Sensitivity adjustment and NO/NC selection by Teach-in button									
output	1	0...10 V single voltage analogue output									
	2	4...20 mA single current analogue output									
	P	PNP - NO/NC digital output									
	N	NPN- NO/NC digital output									
	W	PNP two digital outputs with standard window and adjustable hysteresis functions <sup>(**)</sup>									
	M	NPN two digital outputs with standard window and adjustable hysteresis functions <sup>(**)</sup>									
	6	PNP - NO/NC digital output + 4 ... 20 mA current analogue output									
	4	NPN - NO/NC digital output + 4 ... 20 mA current analogue output									
	7	PNP - NO/NC digital output + 0 ... 10 V voltage analogue output									
9	NPN - NO/NC digital output + 0 ... 10 V voltage analogue output										
housing materials	0	Axial plastic housing									
	1	Axial AISI 316L (DIN 1.4404) stainless steel housing									
cable exit / connector	E	M12 plug cable exit									
	A	2 m cable exit									
cULus	UL	With cULus certification									

<sup>(\*)</sup>Models with synchronization available <sup>(\*\*)</sup>Sensitivity adjustment and status selection available by external Teach-In.



## available models

cULus certified

housing	distance (mm)	output	analogue output 0...10 V	analogue output 4...20 mA	1 x PNP - NO/NC	1 x NPN - NO/NC
plastic	3,500 mm	M12	UT1B/E1-0EUL	UT1B/E2-0EUL	UT1B/EP-0EUL	UT1B/EN-0EUL
		cable	UT1B/E1-0AUL	UK1B/E2-0AUL	UT1B/EP-0AUL	UT1B/EN-0AUL

## available models

cULus certified - Double digital output

housing	distance (mm)	output	2 X PNP (adjustable hysteresis + standard window MD)	2 X NPN (adjustable hysteresis + standard window MD)
plastic	3,500 mm	M12	UT1B/EW-0EUL	UT1B/EM-0EUL
		cable	UT1B/EW-0AUL	UK1B/EM-0AUL
AISI316L	3,500 mm	M12	UT1B/EW-1EUL	UT1B/EM-1EUL
		cable	UT1B/EW-1AUL	UT1B/EM-1AUL
plastic	6,000 mm	M12	UT2F/EW-0EUL	UT2F/EM-0EUL
		cable	UT2F/EW-0AUL	UT2F/EH-0AUL

## available models

cULus certified - Double mixed output (digital + analogue)

housing	distance (mm)	output	1 x PNP - NO/NC + 4...20 mA	1 x NPN - NO/NC + 4...20 mA	1 x PNP - NO/NC + 0...10 V	1 x NPN - NO/NC + 0...10 V
plastico	3,500 mm	M12	UT1B/E6-0EUL	UT1B/E4-0EUL	UT1B/E7-0EUL	UT1B/E9-0EUL
		cable	UT1B/E6-0AUL	UT1B/E4-0AUL	UT1B/E7-0AUL	UT1B/E9-0AUL
acciaio inox AISI 316L	3,500 mm	M12	UT1B/E6-1EUL	UT1B/E4-1EUL	UT1B/E7-1EUL	UT1B/E9-1EUL
		cable	UT1B/E6-1AUL	UT1B/E4-1AUL	UT1B/E7-1AUL	UT1B/E9-1AUL
plastico	6,000 mm	M12	UT2F/E6-0EUL	UT2F/E4-0EUL	UT2F/E7-0EUL	UT2F/E9-0EUL
		cable	UT2F/E6-0AUL	UT2F/E4-0AUL	UT2F/E7-0AUL	UT2F/E9-0AUL



	UT1B/E*-**UL	UT2F/E*- 0*UL
maximum sensing distance	3,500 mm <sup>(1)</sup>	6,000 mm <sup>(2)</sup>
minimum sensing distance	250 mm / 350 mm metallic housing	350 mm
sensing range (Sd)	250...3.500 mm (plastic) / 350...3.500 mm (metallic)	350...6.000 mm
beam angle	± 7°	± 9°
switching frequency (digital output)	2 Hz / 1 Hz metallic housing	1 Hz
response time (digital output)	250 ms	500 ms
response time (analogue output)	600 ms	600 ms
hysteresis	1 % off full scale value	
repeatability	1 % off full scale value	0.5 % off full scale value
resolution	4 mm	6 mm
linearity error	1 % off full scale value	
temperature range	- 20°C...+ 70°C	
temperature compensation	●	
operating voltage	12 - 30 Vcc; 15 - 30 Vcc: for model with analog voltage output (0 - 10 V)	
temperature drift	± 8 % (digital output); ± 5 % (analogue output)	
ripple	5 %	
leakage current	≤ 10 µA @ 30 Vcc	
output voltage drop	2.2 V max. (IL = 100 mA)	
no-load supply current	≤ 50 mA	
output current (digital output)	100 mA	
minimum load resistance (analog voltage output)	3 k Ω	
set point adjustment	Teach-In button	
power on delay	≤ 500 ms (digital output)	
power on delay	≤ 900 ms (analogue output)	
power supply protections	polarity reversal, transient	
digital output electrical protection	short circuit (auto reset), overvoltage pulses	
analog output electrical protections	overvoltage pulses	
EMC	conforming to EMC Directive, according to EN 60947-5-2	
protection degree	IP67 (EN60529); NEMA 4X <sup>(3)</sup>	IP67 (EN 60529) <sup>(3)</sup>
housing material	PBT/AISI 316L	PBT
active head material	epoxy-glass resin	
tightening torque	1.5 Nm (plastic housing) / 100 Nm (metallic housing)	1.5 Nm
weight	plastic version: 140 g connector / 200 g cable metallic version: 215 g connector / 220 g cable	170 g connector / 300 g cable
storage temperature	- 35°C...+ 70° without freeze	

<sup>(1)</sup> Metallic target 200 x 200 mm <sup>(2)</sup> Metallic target 400 x 400 <sup>(3)</sup> Protection guarantee only with plug cable well mounted





## available models

retroreflective models M30

M30 with Teach-In button

housing	function	portata (mm)	output	PNP - NO/NC	NPN - NO/NC
plastic	retroreflective	250...3,500	M12	UTR1B/EP-0EUL	UTR1B/EN-0EUL
		350...6,000		UTR2F/EP-0EUL	UTR2F/EN-0EUL
		250...3,500	cable	UTR1B/EP-0AUL	UTR1B/EN-0AUL
		350...6,000		UTR2F/EP-0AUL	UTR2F/EN-0AUL

## technical specification (cULus certified)

	UTR1B/E*-0*	UTR2F/E*-0*
		
nominal sensing distance $S_n$	3,500 mm <sup>(1)</sup>	6,000 mm <sup>(2)</sup>
reflector minimum sensing distance	250 mm	350 mm
beam angle	$\pm 7^\circ$	$\pm 8^\circ$
switching frequency	1 Hz	1 Hz
operating voltage	15 - 30 Vdc	
max. ripple content	5 %	
output type	PNP o NPN NO/NC selectable	
output current	100 mA	
output voltage drop	$\leq 2.2 \text{ V (@ } I = 100\text{mA)}$	
no-load supply current	$\leq 50 \text{ mA @ } V_{al}=24\text{V}$	
leakage current	$\leq 10 \text{ }\mu\text{A @ } 30\text{V}$	
power on delay	$\leq 500 \text{ ms}$	
temperature range	$-20^\circ\text{C} \dots +70^\circ\text{C}$	
temperature drift of $S_r$	$\leq 5 \%$	
short-circuit protection	● (autoreset)	
induction protection	●	
voltage reversal protection	●	
LEDs	yellow: output green: alignment	
protection degree	IP67	
EMC	conforming to EMC Directive according to EN 60947-5-2	
housing material	PBT	
active head material	epoxy glass resin	
connection	M12 plug cable exit, 2 m cable exit	


<sup>(1)</sup> Metallic target 200 x 200 mm <sup>(2)</sup> Metallic target 400 x 400 mm <sup>(3)</sup> Protection granted only by plug mounted in a correct way

UT - UTR


# electrical diagrams of connections



M30 with Teach-In button

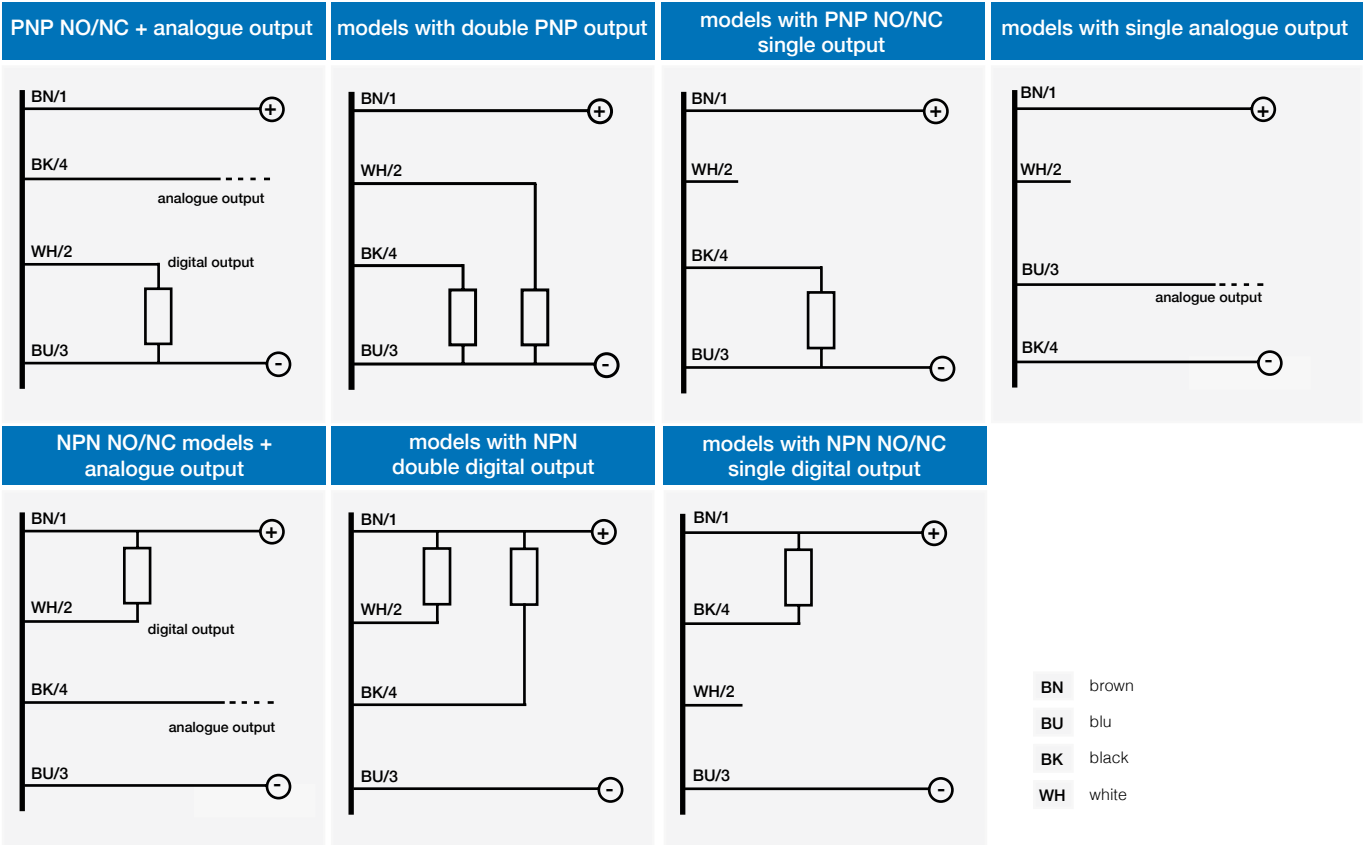


## plugs

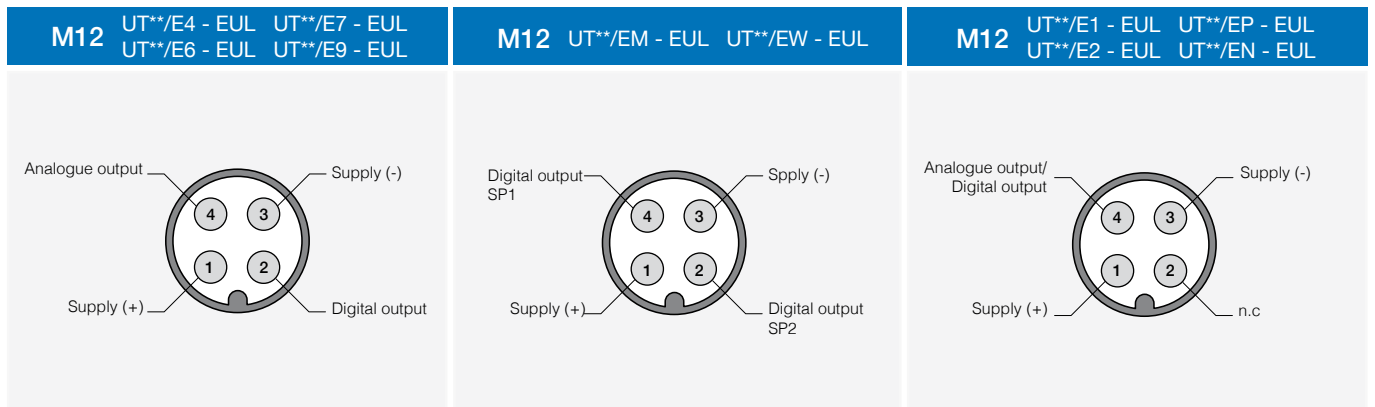

## response diagrams

direct diffuse models

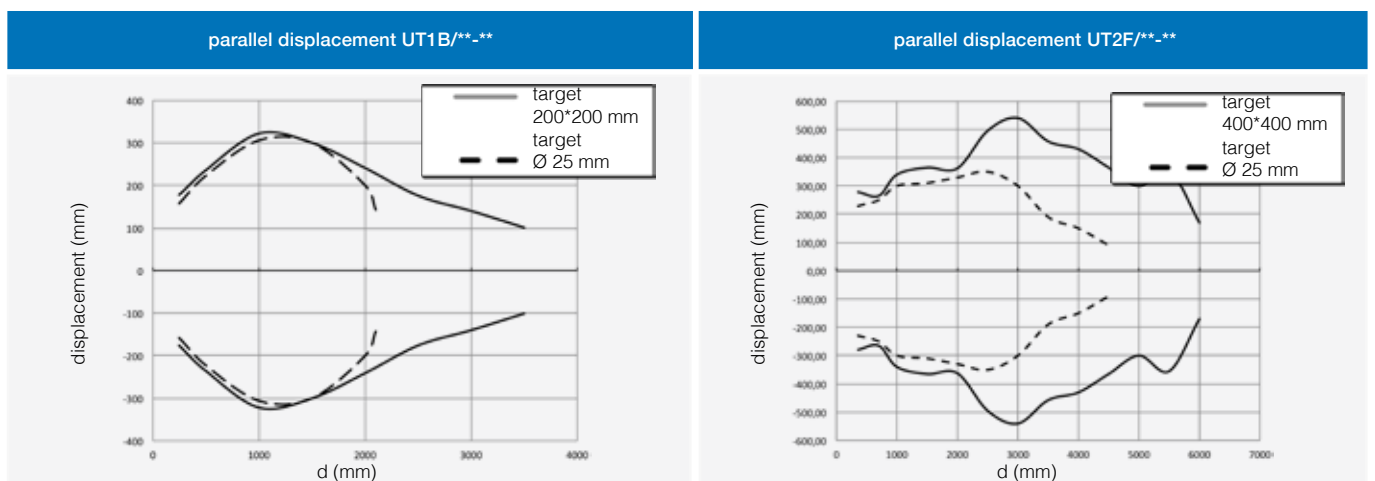




# response diagrams


retroreflective models

M30 with Teach-In button

parallel displacement UTR1B/\*\*\_\*\*

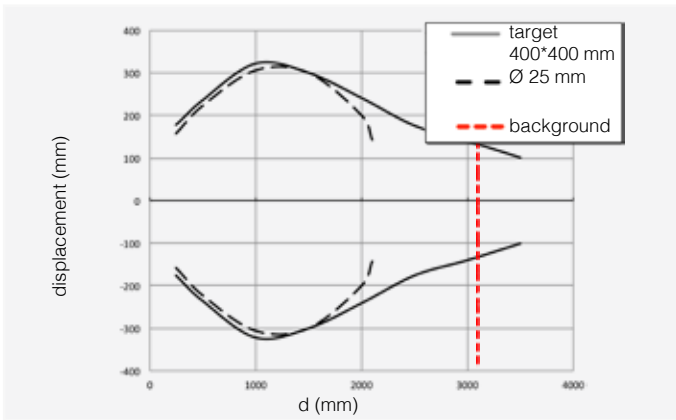

parallel displacement UTR2F/\*\*\_\*\*


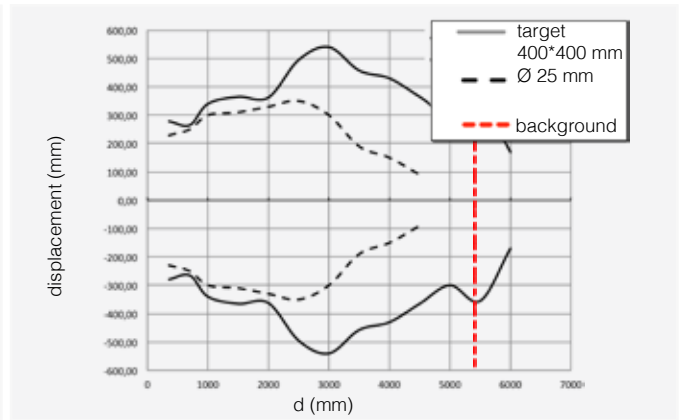


## available outputs



models with single digital output




models with single analogue output

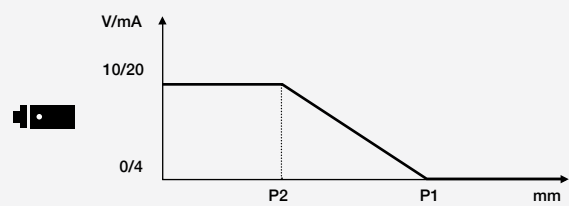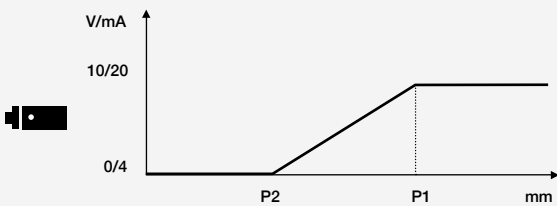

models with digital output + analogue output <sup>(1)</sup>

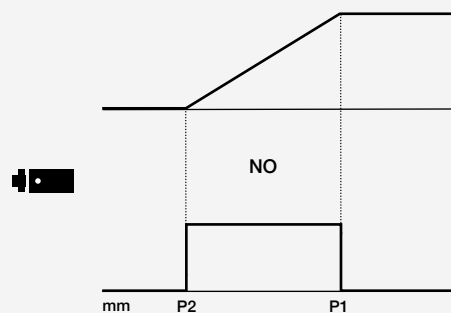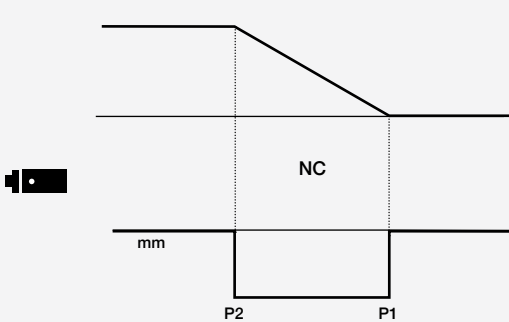

UT - UTR

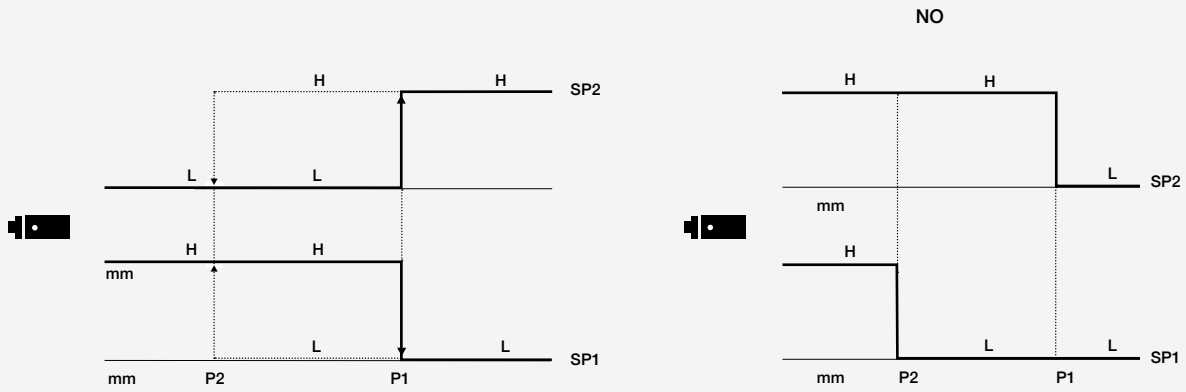

<sup>(1)</sup> Suitable, also, as single model output.

<sup>(2)</sup> In the double digital output model with the standard window and adjustable hysteresis functions if the target is removed from sensor detection range, the output type switches. These models are not forsen with NO/NC function.


- P1** maximum selected working distance and first point to select
- P2** minimum selected working distance and second point to select

## dimensions (mm)

plastic models

## dimensions (mm)

metallic models

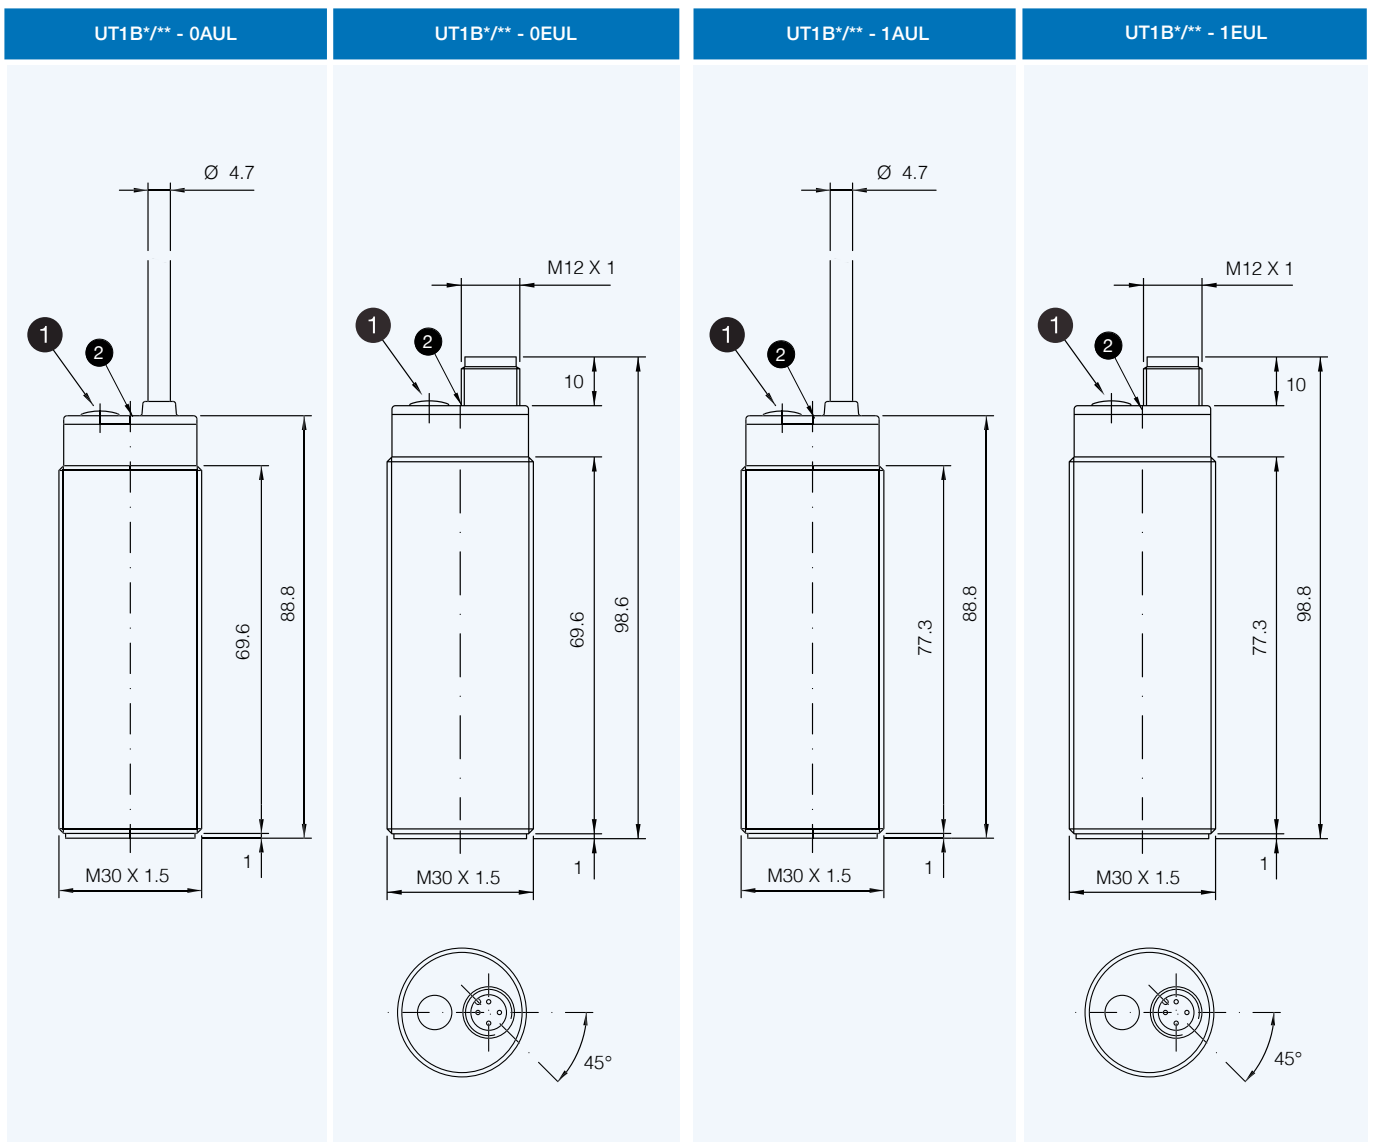


- 1** Teach-In button
- 2** LED




### dimensions (mm)

accessories included in all metallic models

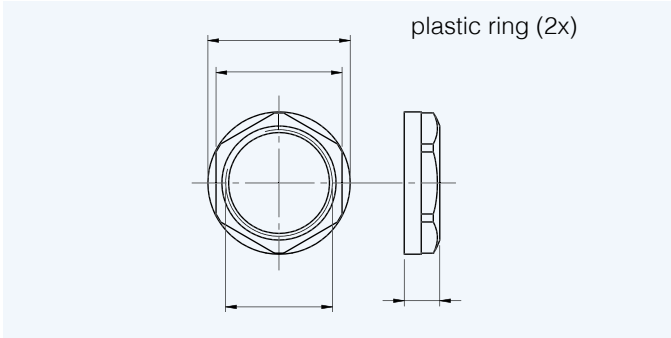



### dimensions (mm)

accessories included in all metallic models

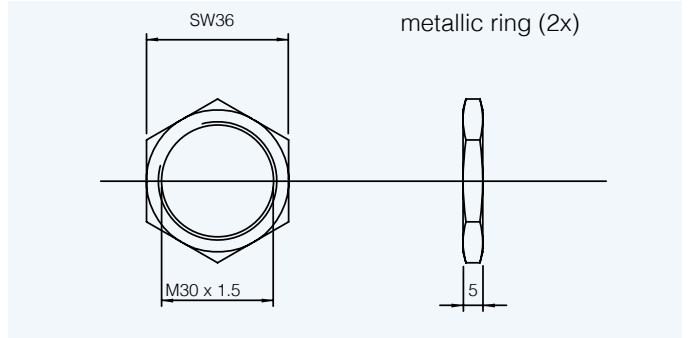

### dimensions (mm)

plastic models

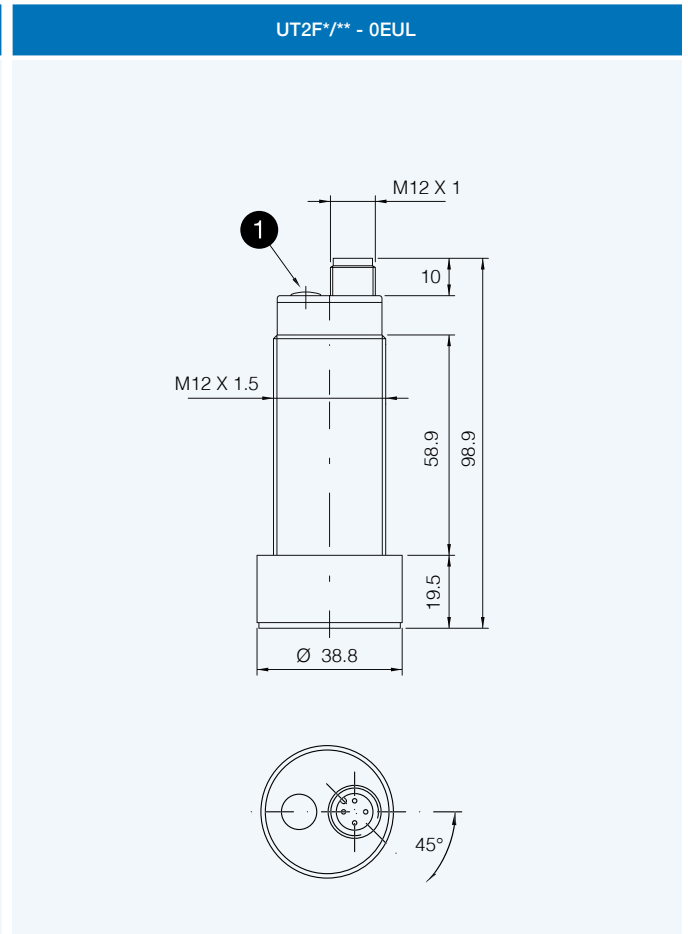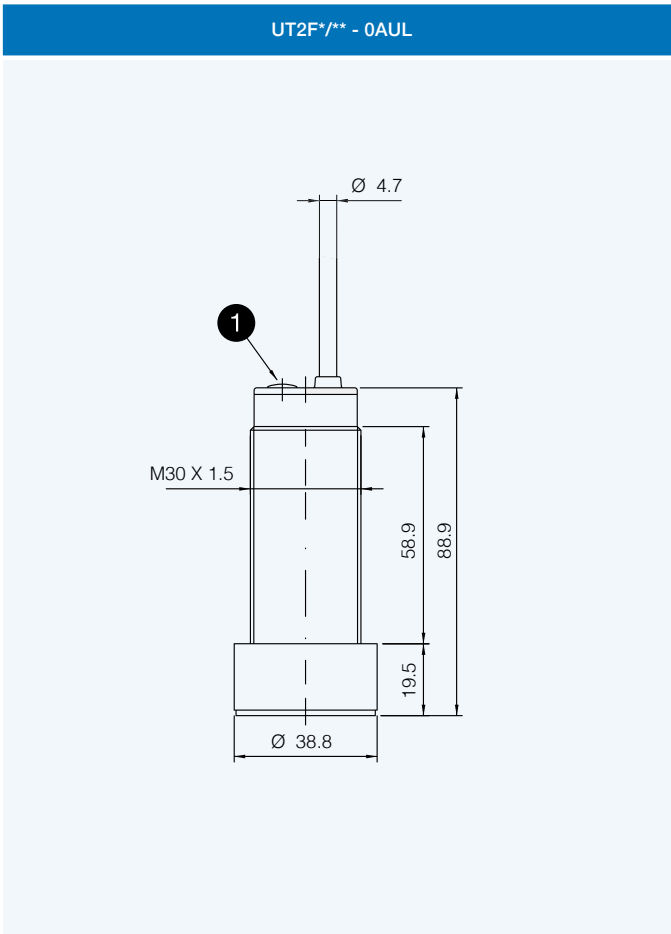

1 Teach-In button

### dimensions (mm)

accessories included in all metallic models

