

# Professional IP Monitor – IP Series

## VMLE2130M-V-IP16


54.6 cm, 21.5" TFT/LCD- IP 16 Ch ( Network ) Monitor LED Backlight

### Special features

- H264 compression format
- VGA/ DVI-D and Full HD Input
- Real-time display
- Graphical and text interfaces (GUI)
- Use Ethernet connection control
- Support HDMI video output (1920 x 1080 @30)
- Supports up to four network cameras via HUB
- Supports network protocols TCP/IP, DHCP, DNS, HTTP, SMTP
- System login



### Monitor Connection

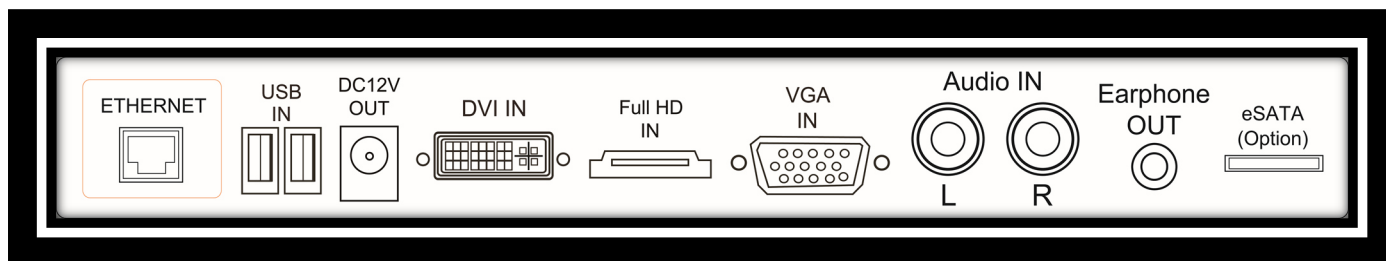

## Specifications

Model	VMLE2130M-V-IP16
LCD panel	21.5"
Visible area (mm)	476.6 x 268.1
Picture format	16 : 9
Max. resolution	1920 x 1080
Pixel dot pitch (mm)	0.248x0.248
Colours	16.7M
Brightness	250 cd/m <sup>2</sup> [LED]
Contrast	3000 :1
Response time(Tr/Tf)	1.3/3.7 ms
View angle (U/D/L/R)	89/89/89/89
Full HD input	1x Full HD
Audio input(R/L)	2x (RCA)
PC input	1x VGA input 1x DVI-D input
Earphone out	1xPhone jack ,3.5ψ
Speaker	2x built-in speaker (2 watt)
IP Video support	16x(1920*1080)+sub(960*576)+4Ref.+16Sub_Play/4Main_Play 16x(1280*960)+sub(960*576)+4Ref.+16Sub_Play/8Main_Play 9x(2048*1536)+sub(960*576)+4Ref.+9Sub_Play/4Main_Play 9x(2592*1944)+sub(960*576)+4Ref.+9Sub_Play/1Main_Play
OSD setting	Yes
Network Port	1x RJ45, 10M/100M
USB Port	2x USB 2.0 ports
HDD Port	1x e-SATA port
Power input	AC 100-240V 50/60Hz, Adapter DC 12V/5A
Power consumption	Approx. 24 watt
Dimensions (WxHxD) mm	531.2 x 322.5 x 71.2
Weight	5.7 kg
Operating temperature	Approx. 24 watt

Subject to technical changes without prior notice. Error excepted.