

made in spain

**SPECIAL BOTTLE JACKS**

With the same technical features as those of our BR jacks. Designed to suit special applications. The lower height of the BRS jacks facilitates easy access to low jacking points. However, the BR2L is used for vehicles with a high jacking point.



Rotatory pump socket. It can be operated from any position.



Safety overload valve. Up to 5t, **OPTIONAL**.



Hydraulic stroke limitation.

Special bottle jacks



**BR2LLC BR2L BR5EM BRS10**

Telescopic bottle jacks




**BRT1.2 BRT2 BRT2EM BRT12**

**TELESCOPIC BOTTLE JACKS**

They include the same technical improvements as our BR jacks. A telescopic piston allows for a very low initial height with a high lifting range.

The EM jacks are fitted with a specific lifting support for vehicles requiring this type of jacking head.

Other designs of jacks with special technical requirements can be manufactured on request, depending on quantities ordered. We also supply jacks fitted with a pressure gauge.

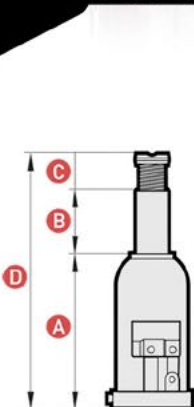

	BR2LLC	BR2L	BR3EM	BR5EM	BR55	BRS10	BRS15	BRS20
<b>CAPACITY (t)</b>	2	2	3	5	5	10	15	20
<b>A</b>	570	297	172	212	135	131	150	190
<b>B</b>	460	225	105	150	70	62	75	105
<b>C</b>	-	-	65	75	40	30	40	55
<b>D</b>	1030	522	338	437	245	223	225	350
<b>Weight (kg)</b>	10,3	6	3,8	4,7	3,7	5	7,2	9,5
<b>REFERENCES</b>	<b>BR2LLC</b>	<b>BR2L</b>	<b>BR3EM</b>	<b>BR5EM</b>	<b>BR55</b>	<b>BRS10</b>	<b>BRS15</b>	<b>BRS20</b>

Measures in mm.

	BRT1.2	BRT2	BRT2MI	BRT2EM	BRT5	BRT12	BRT20
<b>CAPACITY (t)</b>	1,2	2	2	2	5	12	20
<b>A</b>	160	145	145	170	215	245	180
<b>B</b>	230	165	165	212	300	326	205
<b>C</b>	-	50	50	-	-	-	-
<b>D</b>	390	360	360	382	515	571	385
<b>Weight (kg)</b>	5	4,8	5	5,4	8,3	15,4	22
<b>REFERENCES</b>	<b>BRT1.2</b>	<b>BRT2</b>	<b>BRT2MI</b>	<b>BRT2EM</b>	<b>BRT5</b>	<b>BRT12</b>	<b>BRT20</b>

Measures in mm.

