


Datasheet

Art.No. 71.354.2435.1

Hood BAS GOT GI 24 M32 A1

revos BASIC 500V size 24 hood with threaded collar M32, top cable entry, single locking lever

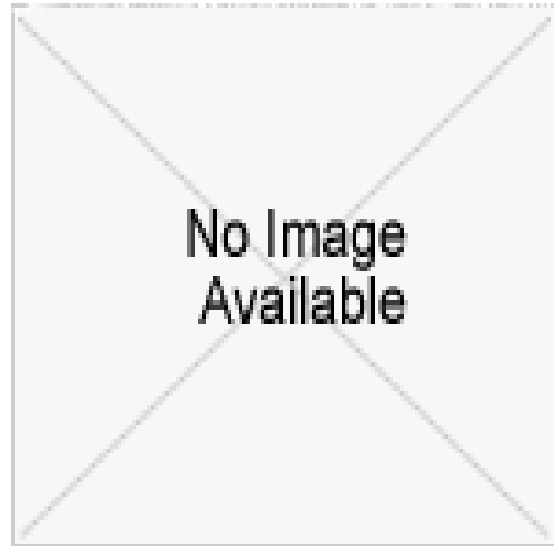

Art.No.	71.354.2435.1
EAN	4015573651791
Order unit	1 pieces

Approvals



Technical data

General

Housing material	Aluminium
Colour	Grey
Surface	With powder coating
Degree of protection (IP)	Other
UV resistant	Yes
Inflammability class of insulation material acc. with UL94	Other
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C

Model

DIN-size	24
Model	male
Locking mechanism	Single locking lever
Cable entry	Above
Type of cable	Thread
With cable screw gland	No
Thread size M	32
Hinged lid	No
EMC-version	No

Classification

ECLASS 8.1	27440202: Housing for industrial connectors
ETIM 6.0	: EC000437

ETIM 5.0	EC000437: Housing for industrial connectors
ETIM 4.0	EC000437: Housing for industrial connectors
ETIM 3.0	EC000437: Housing for industry plug connectors

Drawings

Varianten/ Variants

.0 .2 .3 .4 .5

Bestellnummer / Order number
Typ / Type
Variation / Variant

71.352.2435.5	BAS 60T 61 24 M25 A5	Kabe lverschraubung (KV), IP65 /Cable gland (CB), IP65
71.352.2435.4	BAS 60T 61 24 M25 A4	KV mit Zugentlastung, IP54 /Cable gland with strain relief, IP54
71.352.2435.3	BAS 60T 61 24 M25 A3	KV mit Zugentlastung und Kabe lverschraubung, IP54 /KV with strain relief and cable gland, IP54
71.352.2435.2	BAS 60T 61 24 M25 A2	Zwischenstück (Z)
71.352.2435.1	BAS 60T 61 24 M25 A1	Gez. Nabe lbohrung /Thread hole
71.352.2435.0	BAS 60T 61 24 M25 A0	Kabe lverschraubung (KV), IP54 /Cable gland (CB), IP54

Weitere Daten, siehe KATALOG oder eKatalog.
Additional data, see CATALOG or eCatalog.
www.wieland-electric.com
eshop.wieland-electric.com

GEHAUSEOBerteil
 Gehäuse 24-Kabe lbohrung (Geh-M25-M22)
 Hood size 24-cable inlet top-M25-M22