


Datasheet

Art.No. 70.800.4656.0

Female insert BAS BUCK 46 50 PC


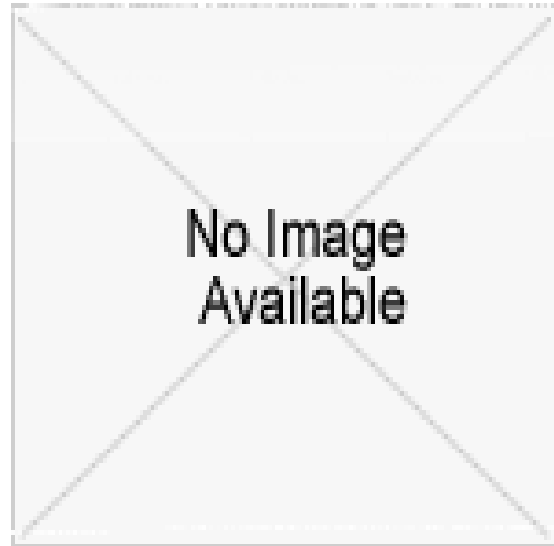


Art.No.	70.800.4656.0
EAN	4015573861930
Order unit	10 pieces


Drawings

Verpackung/packaging: 5 Stück im Karton/ 5 pieces in the cardboard

gezeichnet/drawn: 70.800.3256.0

X  
(um 180° gedreht/around 180° turned)



**Zubehör - Buchsenkontakte**  
Accessories - socket contact

Bestell-Nr.	Ømm <sup>2</sup>	AWG
02.123.70MM.0	0,5	20 AWG
02.123.71MM.0	0,75-1	18 AWG
02.123.72MM.0	1,5	16 AWG
02.123.73MM.0	2,5	14 AWG

MM	Oberfläche surface
01	vergoldet /gold plated
02	versilbert/silver plated

Weitere Daten siehe Katalog  
further data see catalog

**Technische Daten**  
Technical Data

Bemessungsspannung rated voltage	500V
Bemessungsstrom rated current	16A
Bemessungsstoßspannung rated peak voltage	6kV
Verschmutzungsgrad degree of pollution	3
Isoliermaterial insulating material	Polycarbonat
Brennbarkeitsklasse flammability rating	UL 94 V-0
Temperaturbereich temperature range	-40°C - +125°C

**Teile - Nr.**  
part no.

Typ type	A	B	Polz. pole
70.800.1056.0	BAS BUCK 10 50 PC	44	51 10
70.800.1856.0	BAS BUCK 18 50 PC	57	64 18
70.800.3256.0	BAS BUCK 32 50 PC	77,5	84 32
70.800.4656.0	BAS BUCK 46 50 PC	104	111 46

**BUCHSENE INSATZ**  
For Crimpcontacts 500V 16A  
insert insert for crimp contacts