


Datasheet

Art.No. 71.340.1635.1

Bottom BAS GUT GR 16 M25 A1

revos BASIC 500V size 16 closed-bottom base with 2 threaded collars M25, with cover, single locking lever

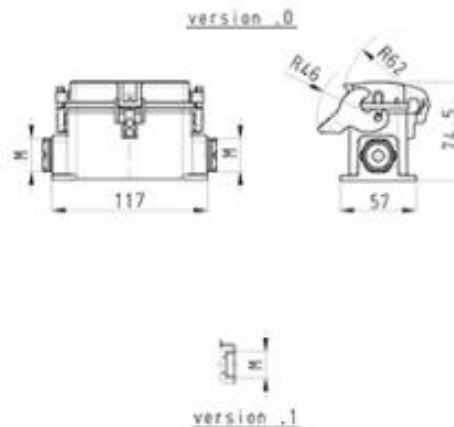

Art.No.	71.340.1635.1
EAN	4015573624849
Order unit	1 pieces

Approvals



Technical data

General

Housing material	Aluminium
Colour	Grey
Surface	With powder coating
Degree of protection (IP)	Other
UV resistant	Yes
Inflammability class of insulation material acc. with UL94	Other
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C

Model

DIN-size	16
Model	Surface mounting (base)
Locking mechanism	Single locking lever
Cable entry	Two-sided
Type of cable	Thread
With cable screw gland	No
Thread size M	25
Hinged lid	Yes
EMC-version	No

Classification

ECLASS 8.1	27440202: Housing for industrial connectors
ETIM 6.0	: EC000437

ETIM 5.0	EC000437: Housing for industrial connectors
ETIM 4.0	EC000437: Housing for industrial connectors
ETIM 3.0	EC000437: Housing for industry plug connectors

Drawings

Bohrbild /Cut out

Dimensions: 117, 56,5, M, 105, 65, Ø5,3/M5

Varianten/Variants

- .0
- .5

71.340.1635.5 BAS GUT GR 16 M25 A5 Kabelfestschraubung, IP65 montiert / Cable gland, IP65 assembled

71.340.1635.1 BAS GUT GR 16 M25 A1 Gewindebohrung / Thread hole

71.340.1635.0 BAS GUT GR 16 M25 A0 Kabelfestschraubung [KV], IP65 montiert / Cable gland [KV], IP65 assembled

Bestellnummer / Order number: **71.340.1635.0**

Typ / Type: **Bas**

Weitere Daten, siehe KATALOG oder eKatalog. / Additional data see CATALOG or eCatalog. www.wieland-electric.com
shop.wieland-electric.com

GEHÄUSEUNTERTEIL
 Baugröße 16-Kabelabzug 2-M5
 Housing size 16-cable outlet 2-M5