


Waterbath

WNB 29

The combination of corrosion-resistant stainless steel, precise electronics and multiple temperature protection guarantees the highest level of safety in the laboratory.



On this page, you can find all the essential technical data on the Memmert water bath. Our customer relations team will be pleased to help if you want further information. If you should require a customised special solution, please contact our technical specialists at sales@memmert.com.

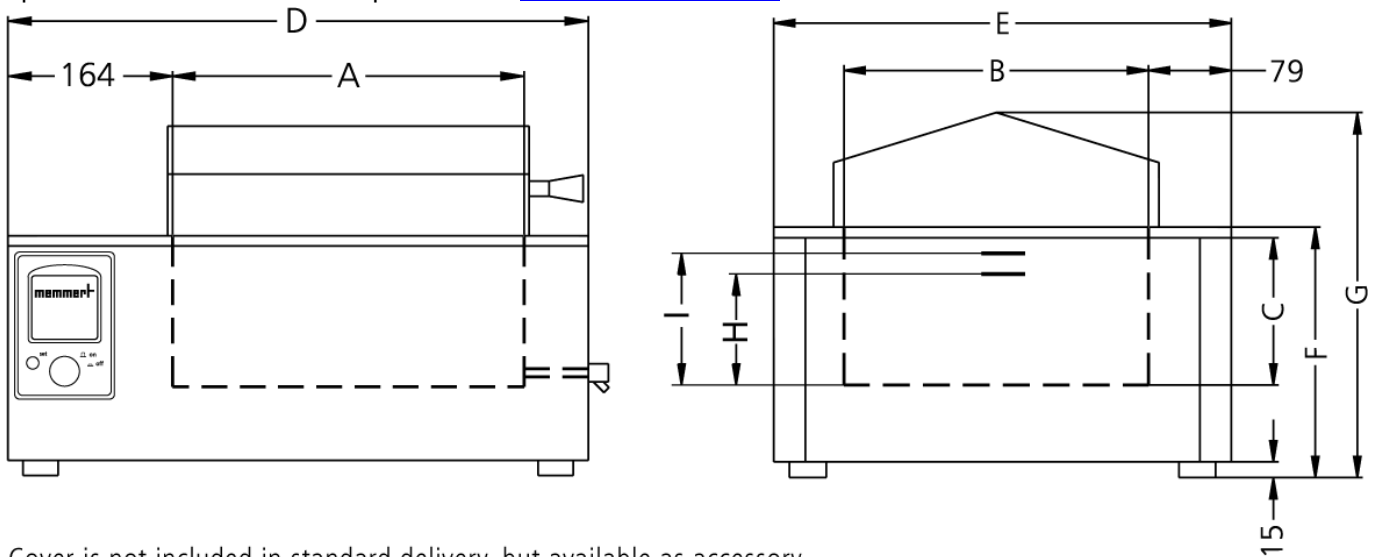

Cover is not included in standard delivery, but available as accessory.

Temperature

Setting temperature range	+10 to +95 °C and boiling stage
Working temperature range in °C	min. 5 above ambient up to +95 °C with additional boiling mode

Control of standard components

Temperature sensor	1 Pt100 sensor class A in 4-wire-circuit
Timer	integrated digital timer from 1 min. to 99,99 hours for:ON continuous operationWAIT (delayed on for continuous andlimited timed operation)HOLD

Safety

Temperature control	mechanical temperature limiter TB protectionclass 1 switching the heating off at approx. 30°Cabove max. temperature of the bath
Temperature control	in case of overtemperature due to failure,the heating is switched off at approx. 10°Cabove the set temperature (fixed value)
Autodiagnostic system	microprocessor PID-temperature controllerwith integrated autodiagnostic system withfault indicator

Heating concept

Heating Baths	corrosion-proof large-area heating onthree sides
----------------------	--

Standard equipment

Controller	digital display (LED) of set and actualtemperature (0,1°C resolution) and of (remaining)programme time
-------------------	--

Stainless steel interior

Dimensions W x H x D in mm	$w_{(A)} \times h_{(C)} \times d_{(B)}$: 590 x 140 x 350 mm
Interior	easy-to-clean interior, made of stainlesssteel, reinforced by deep drawn ribbing,material no. 1.4301 (ASTM 304), laser-welded
Volume	29 l
Liquid level min.	(H) 105 mm
Liquid level max.	(l) 120 mm

Textured stainless steel casing

Dimensions	$w_{(D)} \times h_{(G)} \times d_{(E)}$: 818 x 343 x 516 mm
-------------------	--

Electrical data

Voltage 230 V, 50/60 Hz

Electrical load approx. 2400 W (during heating)

Ambient conditions

Installation The vent openings in the left and back side must remain unobstructed. Minimum wall spacing on all sides is 80 mm. The minimum spacing from the top of the bath to the next ceiling is 750 mm.

Ambient temperature +5 °C to +40 °C

Humidity rh max. 80 %, non-condensing

Overvoltage category II

Pollution degree 2

Packing/shipping data

Transport information The appliances must be transported upright

Customs tariff number 8419 8998

Country of origin Federal Republic of Germany

WEEE-Reg.-No. DE 66812464

Dimensions approx incl. carton w x h x d: 910 x 610 x 400 mm

Net weight approx. 24 kg

Gross weight carton approx. 31 kg

Standard units are safety-approved and bear the test marks

