



الکتروپمپ خطی ( In Line )  
RP NFCVM 40-60/50

نوع پمپ	توان		جریان (آمپر)		قطر فلنج mm		آبدهی Q m3/h l/s	n ≈ 2900 rpm , 50 Hz													
	KW	HP	380 V A	220 V A	مکش	رانش		H (m)													
								2.5	5	6	8	9	10	11	13	14	15	16	18		
R.P NFCVM 40-60/50							0.69	1.39	1.67	2.22	2.50	2.78	3.06	3.61	3.89	4.17	4.44	5			
R.P NFCVM 40-60/50 D	0.37	0.5	1	2.6	50	50	H (m)	6.5	6.3	6	5.6	5.2	4.7	4.3	3	2.5	1.8	*	*		
R.P NFCVM 40-60/50 C	0.37	0.5	1	2.6				9	8.8	8.7	8.4	8	7.8	7.3	6	5.5	4.9	4	2.2		
R.P NFCVM 40-60/50 B	0.55	0.75	1.5	4				10.8	10.5	10.3	10	9.7	9.3	8.9	8	7.4	6.7	6	4.5		
R.P NFCVM 40-60/50 A	0.75	1	1.7	4.8				14.2	14	13.9	13.8	13.6	13.2	12.7	11.9	11.2	10.6	10	8.5		

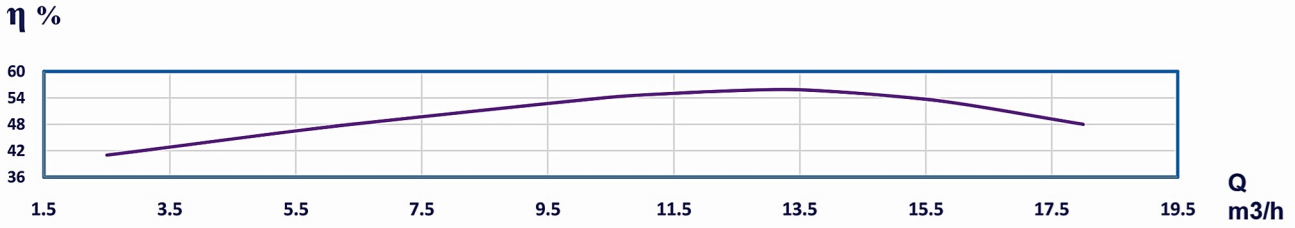

نوع پمپ	توان		جریان (آمپر)		قطر فلنج mm		آبدهی Q m3/h l/s	n ≈ 1450 rpm , 50 Hz											
	KW	HP	380 V A	220 V A	مکش	رانش		H (m)											
								2.5	3	4	5	6	7	8	9	10	11	12	13
R.P NFCV4 40-60/50							0.69	0.84	1.1	1.39	1.67	1.95	2.22	2.5	2.78	3	3.34	3.61	
R.P NFCV4 40-60/50 A	0.37	0.5	1.25	2.8	50	50	H (m)	4.4	4.35	4.3	4.2	4.1	3.9	3.6	3.3	3	2.7	2.2	1.9

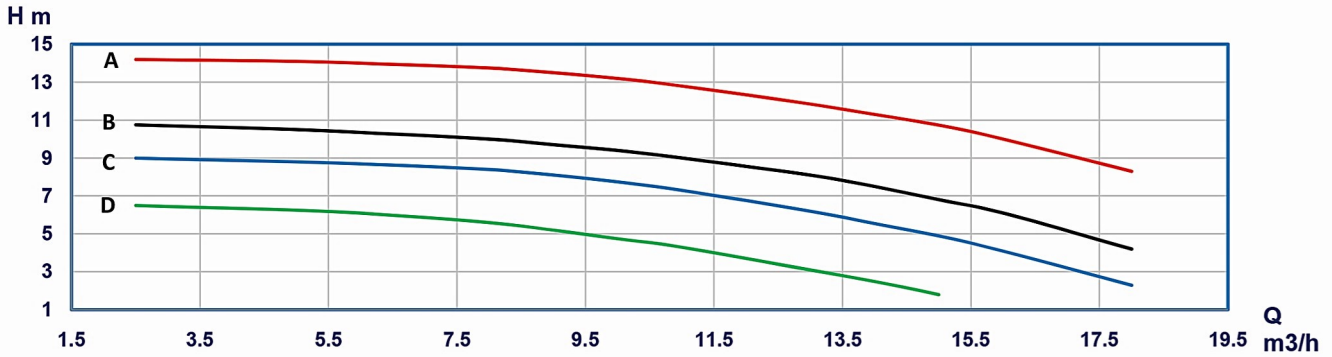