

FEED THROUGH TERMINAL

Current bar: Current bar made from electrolytic grade of copper or copper alloy provides high electrical conductivity and maximum mechanical strength. Current bar has serrations for ensuring firm grip of conductors.


Interconnecting Links: This range of terminals has special arrangements for accommodating interconnecting links starting from 2 ways to 10 ways. These links have Polyamide 6,6 caps for ensuring protection against electrical shock.



Labels: These terminals have SNAP-IN arrangement for terminal identification labels made from Polyamide 6,6 in white colour. Blank and printed markers can be made available.



Screws: Terminal screws are made using hardened steel. Screws are either Cheese head or Philips head type. These screws are suitably electroplated for environmental protection against corrosion.

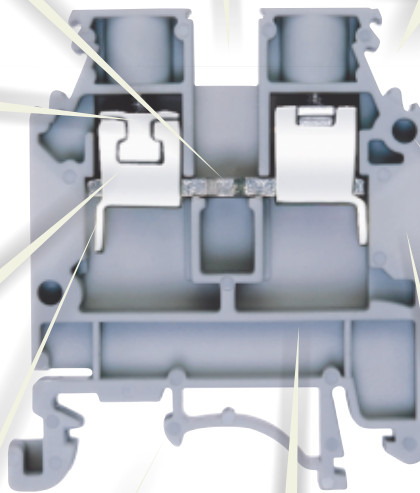

Special insert grooves are provided for snap fitting of compatible End Plate.

Clamp: 'elmex' terminals have clamp with **double interlock construction** that gives high level of mechanical stability to clamp and enhanced torque characteristics. These clamps are made up of CRCA steel and undergo heat treatment. Heat treatment ensures better mechanical properties and gives higher endurance.



Funnel shaped cable entry point in housing facilitates and guides conductor entry in the terminals.

Opening of clamp has flap that prevents conductor entry underneath the clamp.

Housing: Housing is made from insulating material Polyamide 6,6 – one of the most versatile engineering thermoplastic. It conforms to flammability grade V2 as per ANSI / UL Standard UL 94. Insulation housing in V0 grade is also available against specific customer requirements. This material has high value of CTI > 600 V and is RoHS compliant. Also it is free from Si compounds and halogenated compounds.



Mounting: Terminal has mounting arrangement compatible to both TS 32 and TS 35. This arrangement complies with DIN / IEC Standards.












Range: 'elmex' Feed Through terminals are capable of terminating cable sizes from 0.5 sq. mm. (20 AWG) to 120 sq. mm. (0-2 AWG).


FEED THROUGH TERMINAL KUT 2.5N

accessories



CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		KPXN	100	0.31
PARTITION PLATE WITHOUT FOOT		—	—	—
PARTITION PLATE WITH FOOT		KNBF2.5/10	100	0.60
SUPPORT FOR PROTECTION COVER		UHDD	100	0.80
PROTECTION COVER		PCK 3	100	7.00
END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80
MARKING LABEL		LABEL KN 5	100 STRIPS	0.08
WARNING LABEL		—	—	—
GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50

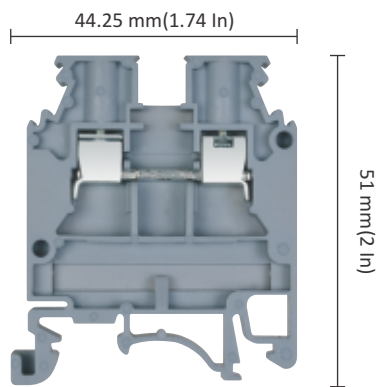TERMINAL PITCH	5 mm(0.20 Inch)		
RATED CROSS SECTION	2.5 sq mm		
CONNECTION	Flexible	0.5 sq mm - 2.5 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 4 sq mm	
WIRE STRIPPING LENGTH	10 mm		
TYPE OF CONNECTION	2 screw clamp and 1 tapped hole for cross connection		
SCREW SIZE	M2.6		




KUT 2.5N

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
		Flat Pin	60947-7-1	1059	22.2 No. 158	60079-7
	Ø 4	Round Pin				

TERMINAL TYPE	CAT#	STD. PKG.	WT/STD.PKG-KG
KUT 2.5N	KUT 2.5N	100	0.90

RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
IEC	1000 V	2.5 sq mm	24 A	0.4 Nm
CSA/UL	600 V	12-20 AWG	20 A	6 Lbin







COLOUR:	KUT 2.5N(G)	KUT 2.5N(K)
G - GREY, K - KHAKHI		
R - RED, Y - YELLOW, B - BLUE	KUT 2.5N(R)	KUT 2.5N(Y)
BL - BLACK, GR - GREEN	KUT 2.5N(BL)	KUT 2.5N(GR)

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50












inter connecting accessories



CAT# STD. PKG. WT/STD.PKG-KG





SHORTING LINK ASSEMBLY	- 2 WAY	CCLM2.5N	100	0.27
	- 3 WAY	CCLM2.5N	100	0.41
	- 4 WAY	CCLM2.5N	50	0.26
	- 5 WAY	CCLM2.5N	50	0.33
	- 10 WAY	CCLM2.5N	25	0.33
PERMANENT SHORTING LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—
COMB LINK	- 2 WAY	SLC2.5N	100	0.13
	- 3 WAY	SLC2.5N	100	0.19
	- 4 WAY	SLC2.5N	100	0.24
	- 5 WAY	SLC2.5N	50	0.16
	- 10 WAY	SLC2.5N	50	0.31
REMOVABLE SHORTING LINK		RSL2.5N	100	0.05
STUD FOR REMOVABLE SHORTING LINK		LSR2.5N	100	0.30


accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
END PLATE 	KPXN	100	0.31
PARTITION PLATE WITHOUT FOOT 	—	—	—
PARTITION PLATE WITH FOOT 	KNBF2.5/10	100	0.60
SUPPORT FOR PROTECTION COVER 	UHDD	100	0.80
PROTECTION COVER 	PCK 3	100	7.00
END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80
			
MARKING LABEL 	LABEL KN 5.5	100 STRIPS	0.08
WARNING LABEL 	—	—	—
GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50
			

FEED THROUGH TERMINAL KUT 4N





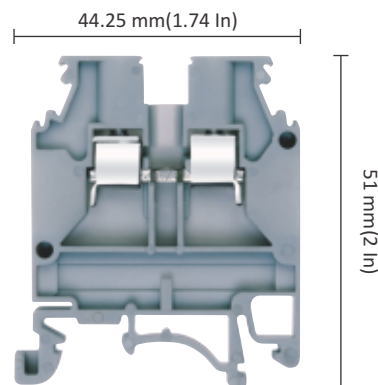

TERMINAL PITCH	6 mm(0.24 Inch)		
RATED CROSS SECTION	4 sq mm		
CONNECTION	Flexible	0.5 sq mm - 4 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 4 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	2 screw clamp and 1 tapped hole for cross connection		
SCREW SIZE	M3		


LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 5	 Flat Pin	60947-7-1	1059	22.2 No. 158	60079-7
		 Round Pin				



KUT 4N

inter connecting accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
SHORTING LINK ASSEMBLY			
- 2 WAY 	CCLA4N	100	0.32
- 3 WAY	CCLA4N	100	0.46
- 4 WAY	CCLA4N	50	0.31
- 5 WAY	CCLA4N	50	0.38
- 10 WAY	CCLA4N	25	0.38
PERMANENT SHORTING LINK			
- 2 WAY 	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK 	—	—	—
COMB LINK			
- 2 WAY 	SLC4N	100	0.20
- 3 WAY	SLC4N	100	0.30
- 4 WAY	SLC4N	100	0.40
- 5 WAY	SLC4N	50	0.25
- 10 WAY	SLC4N	50	0.50
REMOVABLE SHORTING LINK 	RSLDD	100	0.06
STUD FOR REMOVABLE SHORTING LINK 	LSR6N	100	0.65

	CAT#	STD. PKG.	WT/STD.PKG-KG		
TERMINAL TYPE	KUT 4N	100	1.15		
RATING	IEC	1000 V	4 sq mm	32 A	0.5 Nm
	CSA/UL	600 V	10-20 AWG	30 A	6 LbfIn
COLOUR:					
G - GREY, K - KHAKHI	KUT 4N(G)	KUT 4N(K)			
R - RED, Y - YELLOW, B - BLUE	KUT 4N(R)	KUT 4N(Y)	KUT 4N(B)		
BL - BLACK, GR - GREEN	KUT 4N(BL)	KUT 4N(GR)			
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36		
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36		
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34		
	CHKDS10	50	34.50		






FEED THROUGH TERMINAL KUT 6N

accessories



CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		KPXN	100	0.31
PARTITION PLATE WITHOUT FOOT		—	—	—
PARTITION PLATE WITH FOOT		KNBF2.5/10	100	0.60
SUPPORT FOR PROTECTION COVER		UHDD	100	0.80
PROTECTION COVER		PCK 3	100	7.00
END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80
MARKING LABEL		LABEL KN 8	100 STRIPS	0.12
WARNING LABEL		—	—	—
GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50

TERMINAL PITCH	8 mm (0.31 Inch)		
RATED CROSS SECTION	6 sq mm		
CONNECTION	Flexible	0.5 sq mm - 6 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 10 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	2 screw clamp and 1 tapped hole for cross connection		
SCREW SIZE	M3.5		

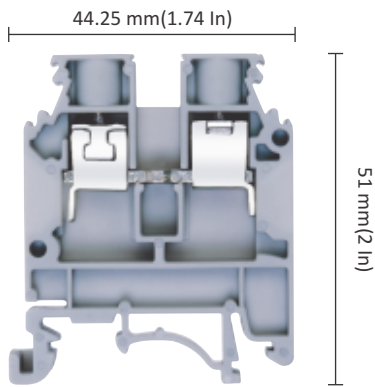


KUT 6N

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
		Flat Pin	60947-7-1	1059	22.2 No. 158	60079-7
	Ø 6	Round Pin				

TERMINAL TYPE	KUT 6N	50	0.80
---------------	--------	----	------

RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
	IEC	1000 V	6 sq mm	41 A
CSA/UL	600 V	8-20 AWG	50 A	13 Lbin







COLOUR:			
G - GREY, K - KHAKHI	KUT 6N(G)	KUT 6N(K)	
R - RED, Y - YELLOW, B - BLUE	KUT 6N(R)	KUT 6N(Y)	KUT 6N(B)
BL - BLACK, GR - GREEN	KUT 6N(BL)	KUT 6N(GR)	

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50






inter connecting accessories



CAT# STD. PKG. WT/STD.PKG-KG





SHORTING LINK ASSEMBLY	- 2 WAY	CCLA6N	100	0.58
	- 3 WAY	CCLA6N	100	0.86
	- 4 WAY	CCLA6N	50	0.58
	- 5 WAY	CCLA6N	50	0.71
	- 10 WAY	CCLA6N	25	0.72
PERMANENT SHORTING LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—
COMB LINK	- 2 WAY	SLC6	100	0.27
	- 3 WAY	SLC6	100	0.43
	- 4 WAY	SLC6	100	0.59
	- 5 WAY	SLC6	50	0.36
	- 10 WAY	SLC6	50	0.75
REMOVABLE SHORTING LINK		RSL6N	100	0.06
STUD FOR REMOVABLE SHORTING LINK		LSR6N	100	0.65


accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
END PLATE 	KPXN	100	0.31
PARTITION PLATE WITHOUT FOOT 	—	—	—
PARTITION PLATE WITH FOOT 	KNBF2.5/10	100	0.60
SUPPORT FOR PROTECTION COVER 	UHDD	100	0.80
PROTECTION COVER 	PCK 3	100	7.00
END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80
MARKING LABEL 	LABEL KN 10	100 STRIPS	0.15
WARNING LABEL 	—	—	—
GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50

FEED THROUGH TERMINAL KUT 10N




TERMINAL PITCH	10 mm(0.40 Inch)		
RATED CROSS SECTION	10 sq mm		
CONNECTION	Flexible	1.5 sq mm - 10 sq mm	
POSSIBILITY	Rigid	1.5 sq mm - 16 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	2 screw clamp and 1 tapped hole for cross connection		
SCREW SIZE	M4		

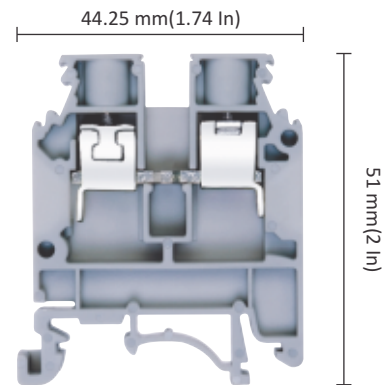
LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 7	 Flat Pin	60947-7-1	1059	22.2 No. 158	60079-7
		 Round Pin				



KUT 10N

inter connecting accessories





	CAT#	STD. PKG.	WT/STD.PKG-KG
SHORTING LINK ASSEMBLY	CCLA10N	100	0.76
- 2 WAY	CCLA10N	100	1.16
- 3 WAY	CCLA10N	50	0.78
- 4 WAY	CCLA10N	50	0.98
- 5 WAY	CCLA10N	25	0.98
- 10 WAY			
PERMANENT SHORTING LINK	—	—	—
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK 	—	—	—
COMB LINK	SLC10N	100	0.27
- 2 WAY	SLC10N	100	0.43
- 3 WAY	SLC10N	100	0.59
- 4 WAY	SLC10N	50	0.36
- 5 WAY	SLC10N	50	0.75
- 10 WAY			
REMOVABLE SHORTING LINK 	—	—	—
STUD FOR REMOVABLE SHORTING LINK 	—	—	—



	CAT#	STD. PKG.	WT/STD.PKG-KG		
TERMINAL TYPE	KUT 10N	50	0.90		
RATING	IEC	1000 V	10 sq mm	65 A	1.2 Nm
	CSA/UL	600 V	6-16 AWG	65 A	14 Lbln
COLOUR:	G - GREY, K - KHAKHI R - RED, Y - YELLOW, B - BLUE BL - BLACK, GR - GREEN				
	KUT 10N(G) KUT 10N(K) KUT 10N(R) KUT 10N(Y) KUT 10N(B) KUT 10N(BL) KUT 10N(GR)				
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36		
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36		
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34		
	CHKDS10	50	34.50		
					


FEED THROUGH TERMINAL KUT 16

accessories





CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		KPY	100	0.37
PARTITION PLATE WITHOUT FOOT		KBY	100	0.43
PARTITION PLATE WITH FOOT		KBZF	100	0.75
SUPPORT FOR PROTECTION COVER		UHDD	100	0.80
PROTECTION COVER		PCK 3	100	7.00
END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80
MARKING LABEL		LABEL KN 12	100 STRIPS	0.18
WARNING LABEL		WL 16	100	0.52
GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50

TERMINAL PITCH	12 mm (0.47 Inch)		
RATED CROSS SECTION	16 sq mm		
CONNECTION	Flexible	6 sq mm - 16 sq mm	
POSSIBILITY	Rigid	6 sq mm - 25 sq mm	
WIRE STRIPPING LENGTH	15 mm		
TYPE OF CONNECTION	2 screw clamps and 1 tapped hole for cross connection		
SCREW SIZE	M4		

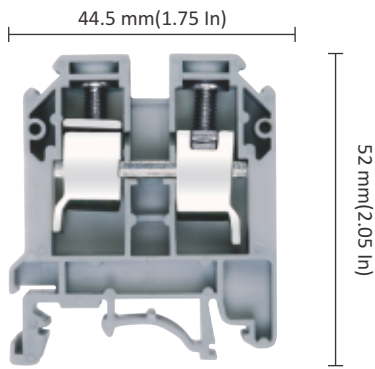

KUT 16

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 7	 Flat Pin  Round Pin	60947-7-1	1059	22.2 No. 158	60079-7


inter connecting accessories







CAT# STD. PKG. WT/STD.PKG-KG

TERMINAL TYPE	KUT16	100	2.70
---------------	-------	-----	------

RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
IEC	800 V	16 sq mm	76 A	1.2 Nm
CSA/UL	600 V	3-12 AWG	100 A	17 LbIn










COLOUR:	
G - GREY, K - KHAKHI	KUT 16(G) KUT 16(K)
R - RED, Y - YELLOW, B - BLUE	KUT 16(R) KUT 16(Y) KUT 16(B)
BL - BLACK, GR - GREEN	KUT 16(BL) KUT 16(GR)

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50



SHORTING LINK ASSEMBLY	- 2 WAY	CCLA 16	100	0.83
	- 3 WAY	CCLA 16	100	1.24
	- 4 WAY	CCLA 16	50	0.83
	- 5 WAY	CCLA 16	50	1.04
	- 10 WAY	CCLA 16	25	1.04
PERMANENT SHORTING LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—
COMB LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—
REMOVABLE SHORTING LINK		RSL16	100	0.16
STUD FOR REMOVABLE SHORTING LINK		LSR 10-16	100	0.49







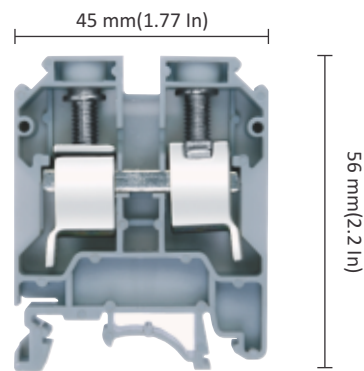
accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
END PLATE 	KPT	100	0.45
PARTITION PLATE WITHOUT FOOT 	KBT	100	0.56
PARTITION PLATE WITH FOOT 	KBZF	100	0.75
SUPPORT FOR PROTECTION COVER 	UHDD	100	0.80
PROTECTION COVER 	PCK 3	100	7.00
END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80
MARKING LABEL 	LABEL KN 12	100 STRIPS	0.18
WARNING LABEL 	WL 16	100	0.52
GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50

FEED THROUGH TERMINAL KUT 25



















TERMINAL PITCH	12 mm(0.47 Inch)		
RATED CROSS SECTION	25 sq mm		
CONNECTION	Flexible	6 sq mm - 25 sq mm	
POSSIBILITY	Rigid	6 sq mm - 25 sq mm	
WIRE STRIPPING LENGTH	15 mm		
TYPE OF CONNECTION	2 screw clamp and 1 tapped hole for cross connection		
SCREW SIZE	M5		


LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 7	 Flat Pin  Round Pin	60947-7-1	1059	22.2 No. 158	60079-7



KUT 25

inter connecting accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
SHORTING LINK ASSEMBLY			
- 2 WAY 	CCLA 25	100	0.83
- 3 WAY 	CCLA 25	100	1.24
- 4 WAY 	CCLA 25	50	0.83
- 5 WAY 	CCLA 25	50	1.04
- 10 WAY 	CCLA 25	50	2.08
PERMANENT SHORTING LINK			
- 2 WAY 	—	—	—
- 3 WAY 	—	—	—
- 4 WAY 	—	—	—
- 5 WAY 	—	—	—
- 10 WAY 	—	—	—
STUD FOR PERMANENT SHORTING LINK 	—	—	—
COMB LINK			
- 2 WAY 	—	—	—
- 3 WAY 	—	—	—
- 4 WAY 	—	—	—
- 5 WAY 	—	—	—
- 10 WAY 	—	—	—
REMOVABLE SHORTING LINK 	RSL 25	100	0.22
STUD FOR REMOVABLE SHORTING LINK 	LSR 10-16	100	0.49



	CAT#	STD. PKG.	WT/STD.PKG-KG		
TERMINAL TYPE	KUT 25	50	1.83		
RATING	IEC	1000 V	25 sq mm	101 A	2.3 Nm
	CSA/UL	600 V	2-10 AWG	115 A	20 Lbln
COLOUR:					
G - GREY, K - KHAKHI	KUT 25(G)	KUT 25(K)			
R - RED, Y - YELLOW, B - BLUE	KUT 25(R)	KUT 25(Y)	KUT 25(B)		
BL - BLACK, GR - GREEN	KUT 25(BL)	KUT 25(GR)			
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36		
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36		
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34		
	CHKDS10	50	34.50		






FEED THROUGH TERMINAL KUT 35

accessories

CAT# STD. PKG. WT/STD.PKG-KG

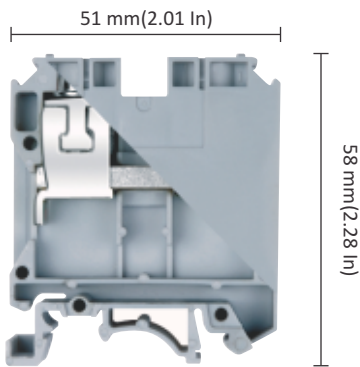TERMINAL PITCH	17 mm (0.67 Inch)		
RATED CROSS SECTION	35 sq mm		
CONNECTION	Flexible	10 sq mm - 35 sq mm	
POSSIBILITY	Rigid	10 sq mm - 35 sq mm	
WIRE STRIPPING LENGTH	17 mm		
TYPE OF CONNECTION	2 screw clamps and 1 tapped hole for cross connection		
SCREW SIZE	M6		




LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
		Flat Pin	60947-7-1	1059	22.2 No. 158	60079-7
	Ø 8	Round Pin				

KUT 35

	CAT#	STD. PKG.	WT/STD.PKG-KG
TERMINAL TYPE	KUT 35	50	2.94

	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE	
RATING	IEC	1000 V	35 sq mm	125 A	3 Nm
	CSA/UL	600 V	1-14 AWG	130 A	38 LbIn


COLOUR:	KUT 35(G)	KUT 35(K)
G - GREY, K - KHAKHI		
R - RED, Y - YELLOW, B - BLUE	KUT 35(R)	KUT 35(Y) KUT 35(B)
BL - BLACK, GR - GREEN	KUT 35(BL)	KUT 35(GR)

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50



inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG

SHORTING LINK ASSEMBLY	WAY	CCLA 35K	50	0.60
	- 3 WAY	CCLA 35K	50	0.90
	- 4 WAY	CCLA 35K	25	0.60
	- 5 WAY	CCLA 35K	25	0.38
	- 10 WAY	CCLA 35K	25	0.76

PERMANENT SHORTING LINK	WAY			
	- 2 WAY			
	- 3 WAY			
	- 4 WAY			
	- 5 WAY			
	- 10 WAY			

STUD FOR PERMANENT SHORTING LINK				
				










COMB LINK	WAY			
	- 2 WAY			
	- 3 WAY			
	- 4 WAY			
	- 5 WAY			
	- 10 WAY			

REMOVABLE SHORTING LINK		RSL 35K	100	0.25
				



STUD FOR REMOVABLE SHORTING LINK		LSR 35K	100	0.80
				




accessories


CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		Not Required		
PARTITION PLATE WITHOUT FOOT		—	—	—
PARTITION PLATE WITH FOOT		—	—	—
SUPPORT FOR PROTECTION COVER		—	—	—
PROTECTION COVER		—	—	—
END CLAMPS		—	—	—
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		—	—	—
MARKING LABEL		LABEL KN 17	100 STRIPS	0.22
WARNING LABEL		—	—	—
GROUP MARKING CARRIER		—	—	—
		SCUNMLH	50	0.60

FEED THROUGH TERMINAL KUT 50

TERMINAL PITCH	20.5 mm(0.81 Inch)		
RATED CROSS SECTION	50 sq mm		
CONNECTION	Flexible	16 sq mm - 50 sq mm	
POSSIBILITY	Rigid	16 sq mm - 70 sq mm	
WIRE STRIPPING LENGTH	24 mm		
TYPE OF CONNECTION	2 screw clamp and 1 tapped hole for cross connection		
SCREW SIZE	M6		



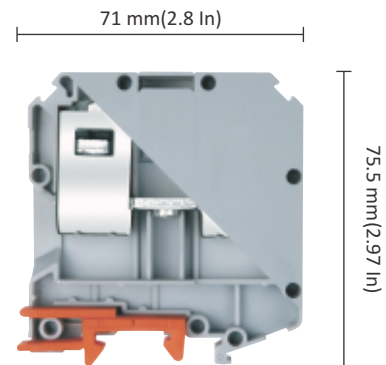
LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 8	 Flat Pin Round Pin	60947-7-1	1059	22.2 No. 158	60079-7



KUT 50

inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG

SHORTING LINK ASSEMBLY	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY	CCLA50 CCLA50 — — —	50 50 — — —	2.00 3.00 — — —
PERMANENT SHORTING LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY	— — — — —	— — — — —	— — — — —
STUD FOR PERMANENT SHORTING LINK		—	—	—
COMB LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY	— — — — —	— — — — —	— — — — —
REMOVABLE SHORTING LINK		—	—	—
STUD FOR REMOVABLE SHORTING LINK		—	—	—


	CAT#	STD. PKG.	WT/STD.PKG-KG	
TERMINAL TYPE	KUT 50	10	1.27	
RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
	IEC	1000 V	50 sq mm	150 A
CSA/UL	600 V	2/0-6 AWG	150 A	60 Lbln
COLOUR:				
G - GREY, K - KHAKHI	KUT 50(G)	KUT 50(K)		
R - RED, Y - YELLOW, B - BLUE	KUT 50(R)	KUT 50(Y)	KUT 50(B)	
BL - BLACK, GR - GREEN	KUT 50(BL)	KUT 50(GR)		
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36	
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36	
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34	
	CHKDS10	50	34.50	



FEED THROUGH TERMINAL KUT 95

accessories

CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		NOT REQUIRED		
-----------	---	--------------	--	--

PARTITION PLATE WITHOUT FOOT		—	—	—
------------------------------	---	---	---	---

PARTITION PLATE WITH FOOT		—	—	—
---------------------------	---	---	---	---

SUPPORT FOR PROTECTION COVER		—	—	—
------------------------------	---	---	---	---

PROTECTION COVER		—	—	—
------------------	---	---	---	---



END CLAMPS		—	—	—
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64




MARKING LABEL		LABEL KN 17	100 STRIPS	0.22
---------------	---	-------------	------------	------



WARNING LABEL		—	—	—
---------------	---	---	---	---

GROUP MARKING CARRIER		—	—	—
		SCUNMLH	50	0.60

TERMINAL PITCH	25 mm (0.98 Inch)		
RATED CROSS SECTION	95 sq mm		
CONNECTION	Flexible	25 sq mm - 95 sq mm	
POSSIBILITY	Rigid	25 sq mm - 120 sq mm	
WIRE STRIPPING LENGTH	33 mm		
TYPE OF CONNECTION	2 screw clamps and 1 tapped hole for cross connection		
SCREW SIZE	M8		

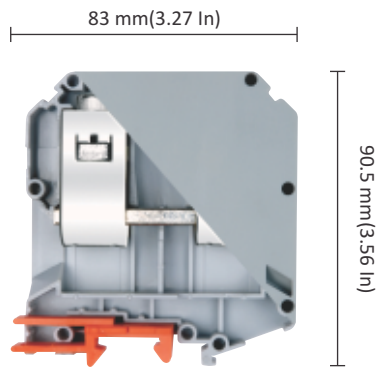

KUT 95

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
		Flat Pin	60947-7-1	1059	22.2 No. 158	60079-7
	Ø 9	Round Pin				


inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG

TERMINAL TYPE	KUT 95	10	2.23
---------------	--------	----	------

RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
IEC	1000 V	95 sq mm	232 A	20 Nm
CSA/UL	600 V	4/0-2 AWG	230 A	160 Lbln

COLOUR:	
G - GREY, K - KHAKHI	KUT 95(G) KUT 95(K)
R - RED, Y - YELLOW, B - BLUE	KUT 95(R) KUT 95(Y) KUT 95(B)
BL - BLACK, GR - GREEN	KUT 95(BL) KUT 95(GR)

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50

SHORTING LINK ASSEMBLY	- 2 WAY	CCLA 95	50	2.80
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—

PERMANENT SHORTING LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—

STUD FOR PERMANENT SHORTING LINK		—	—	—
----------------------------------	---	---	---	---

COMB LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—

REMOVABLE SHORTING LINK		—	—	—
-------------------------	---	---	---	---

STUD FOR REMOVABLE SHORTING LINK		—	—	—
----------------------------------	---	---	---	---

