


Fuse Terminals

Labels: These terminals have SNAP-IN arrangement for terminal identification labels made from Polyamide 6,6 in white colour. Blank and printed markers can be made available.



Current bar: Current bar made from electrolytic grade of copper or copper alloy provides high electrical conductivity and maximum mechanical strength. Current bar has serrations for ensuring firm grip of conductors.

Screws: Terminal screws are made using hardened steel. Screws are either Cheese head or Philips head type. These screws are suitably electroplated for environmental protection against corrosion.



'*elmex*' Fuse Terminals has hinged lever made from Polyamide 6,6. This lever facilitates easy removal / replacement of Fuse. This terminals can accommodate glass cartridge fuse of Ø5 X 20 size conforming to IEC standard 60127-2.



Clamps: '*elmex*' terminals have clamp with **double interlock construction** that give high level of mechanical stability to clamp and enhanced torque characteristics. These clamps are made up of CRCA steel and undergo heat treatment. Heat treatment ensures better mechanical properties and gives higher endurance.



Housing: Housing is made from insulating material Polyamide 6,6 – one of the most versatile engineering thermoplastic. It conforms to flammability grade V2 as per ANSI / UL Standard UL 94. Insulation housing in V0 grade is also available against specific customer requirements. This material has high value of CTI > 600 V and is RoHS compliant. Also it is free from Si compounds and halogenated compounds.



Mounting: Terminal has mounting arrangement compatible to both TS 32 and TS 35. This arrangement complies with DIN / IEC Standards.




Range: '*elmex*' Fuse terminals are capable of terminating cable sizes from 0.5 sq mm (20 AWG) to 50 sq mm (6 AWG).

FUSE TERMINAL KUDF 4

accessories

CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		Not Required		
-----------	---	--------------	--	--

PARTITION PLATE WITHOUT FOOT		—	—	—
------------------------------	---	---	---	---

PARTITION PLATE WITH FOOT		KBZF	100	0.75
---------------------------	---	------	-----	------

SUPPORT FOR PROTECTION COVER		—	—	—
------------------------------	---	---	---	---

PROTECTION COVER		—	—	—
------------------	---	---	---	---


END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80






MARKING LABEL		LABEL KN 8	100 STRIPS	0.12
---------------	---	------------	------------	------

WARNING LABEL		—	—	—
---------------	---	---	---	---





GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50

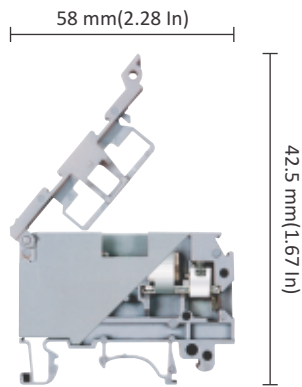

TERMINAL PITCH	8 mm(0.31 Inch)		
RATED CROSS SECTION	4 sq mm		
CONNECTION	Flexible	0.5 sq mm - 4 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 4 sq mm	
WIRE STRIPPING LENGTH	9 mm		
TYPE OF CONNECTION	2 screw clamps		
SCREW SIZE	M3		



KUDF 4


LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 5	Flat  Round 	60947-7-1	1059	22.2 No.158	60079-15







inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG

TERMINAL TYPE	KUDF 4	100	1.36
---------------	--------	-----	------

RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
	IEC	800 V	4 sq mm	6.3 A
CSA/UL	600 V	12-20 AWG	7 A	6 Lbin










COLOUR:			
G - GREY, K - KHAKHI	KUDF 4(G)	KUDF 4(K)	
R - RED, Y - YELLOW, B - BLUE	KUDF 4(R)	KUDF 4(Y)	KUDF 4(B)
BL - BLACK, GR - GREEN	KUDF 4(BL)	KUDF 4(GR)	
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50

SHORTING LINK ASSEMBLY	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
PERMANENT SHORTING LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—	
COMB LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		UFSL	100	0.14
			UFSL	100	0.20
			UFSL	100	0.28
			UFSL	50	0.17
			UFSL	50	0.33
REMOVABLE SHORTING LINK		—	—	—	
STUD FOR REMOVABLE SHORTING LINK		—	—	—	



accessories

CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		Not Required		
PARTITION PLATE WITHOUT FOOT		—	—	—
PARTITION PLATE WITH FOOT		KBZF	100	0.75
SUPPORT FOR PROTECTION COVER		—	—	—
PROTECTION COVER		—	—	—
END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80
MARKING LABEL		LABEL KN 8	100 STRIPS	0.12
WARNING LABEL		—	—	—
GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50


FUSE TERMINAL KUDF 4D*

* TYPE	AVAILABLE SIGNAL VOLTAGE
KUDF 4D1	24 VDC
KUDF 4D2	48 VDC
KUDF 4D3	110 VDC
KUDF 4D4	220 VDC
KUDF 4D5	12 VDC

TERMINAL PITCH 8 mm(0.31 Inch)

RATED CROSS SECTION 4 sq mm


CONNECTION Flexible 0.5 sq mm - 4 sq mm 

POSSIBILITY Rigid 0.5 sq mm - 4 sq mm 





WIRE STRIPPING LENGTH 9 mm

TYPE OF CONNECTION 2 screw clamps

SCREW SIZE M3


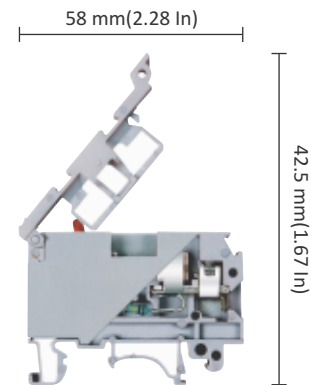






KUDF 4D*

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 5	Flat  Round 	60947-7-1	1059	22.2 No.158	—

inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG

SHORTING LINK ASSEMBLY	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
PERMANENT SHORTING LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—	—
COMB LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		UFSL	100	0.14 0.20 0.28 0.17 0.33
REMOVABLE SHORTING LINK		—	—	—	—
STUD FOR REMOVABLE SHORTING LINK		—	—	—	—

CAT# STD. PKG. WT/STD.PKG-KG


TERMINAL TYPE KUDF 4D 100 1.39

	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
RATING IEC	800 V	4 sq mm	6.3 A	0.4 Nm
CSA/UL	600 V	12-20 AWG	7 A	6 Lbln

COLOUR:

G - GREY, K - KHAKHI
R - RED, Y - YELLOW, B - BLUE
BL - BLACK, GR - GREEN



KUDF 4D(G) KUDF 4D(K)
KUDF 4D(R) KUDF 4D(Y) KUDF 4D(B)
KUDF 4D(BL) KUDF 4D(GR)


MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50



FUSE TERMINAL KUDF 4A*

* TYPE	AVAILABLE SIGNAL VOLTAGE
KUDF 4A1	110 VAC
KUDF 4A2	220 VAC

TERMINAL PITCH	8 mm(0.31 Inch)		
RATED CROSS SECTION	4 sq mm		
CONNECTION	Flexible	0.5 sq mm - 4 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 4 sq mm	
WIRE STRIPPING LENGTH	9 mm		
TYPE OF CONNECTION	2 screw clamps		
SCREW SIZE	M3		

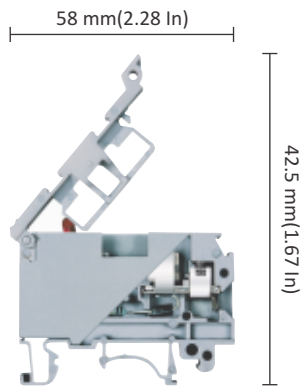

KUDF 4A*

CAT# STD. PKG. WT/STD.PKG-KG

TERMINAL TYPE	KUDF 4A	100	1.42
---------------	---------	-----	------

VOLTAGE RATED CROSS SECTION CURRENT TORQUE


RATING

IEC	800 V	4 sq mm	6.3 A	0.4 Nm
CSA/UL	600 V	12-20 AWG	7 A	6 Lbin

COLOUR:

G - GREY, K - KHAKHI
R - RED, Y - YELLOW, B - BLUE
BL - BLACK, GR - GREEN










KUDF 4A(G) KUDF 4A(K)
KUDF 4A(R) KUDF 4A(Y) KUDF 4A(B)
KUDF 4A(BL) KUDF 4A(GR)





MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50



accessories







CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		Not Required		
PARTITION PLATE WITHOUT FOOT		—	—	—
PARTITION PLATE WITH FOOT		KBZF	100	0.75
SUPPORT FOR PROTECTION COVER		—	—	—
PROTECTION COVER		—	—	—
END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80
				
MARKING LABEL		LABEL KN 8	100 STRIPS	0.12
WARNING LABEL		—	—	—
GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50
				

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 5	Flat  Round 	60947-7-1	1059	22.2 No.158	—










inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG



SHORTING LINK ASSEMBLY	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
PERMANENT SHORTING LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
STUD FOR PERMANENT SHORTING LINK			—	—	—
COMB LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		UFSL	100	0.14
			UFSL	100	0.20
			UFSL	100	0.28
			UFSL	50	0.17
			UFSL	50	0.33
REMOVABLE SHORTING LINK			—	—	—
STUD FOR REMOVABLE SHORTING LINK			—	—	—




accessories


CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		Not Required		
PARTITION PLATE WITHOUT FOOT		—	—	—
PARTITION PLATE WITH FOOT		KBZF	100	0.75
SUPPORT FOR PROTECTION COVER		—	—	—
PROTECTION COVER		—	—	—
END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80
MARKING LABEL		LABEL KN 8	100 STRIPS	0.12
WARNING LABEL		—	—	—
GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50

FUSE TERMINAL KUDDF 4

TERMINAL PITCH	8 mm(0.31 Inch)		
RATED CROSS SECTION	2.5 sq mm		
CONNECTION	Flexible	0.5 sq mm - 2.5 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 4 sq mm	
WIRE STRIPPING LENGTH	9 mm		
TYPE OF CONNECTION	4 screw clamps		
SCREW SIZE	M3		





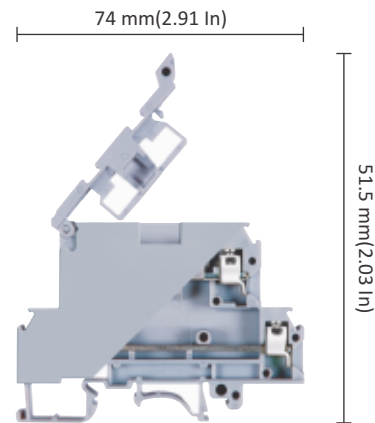

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 5		60947-7-1	1059	22.2 No.158	60079-15




KUDDF 4

inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG



SHORTING LINK ASSEMBLY	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—
PERMANENT SHORTING LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—
COMB LINK	- 2 WAY	UFSL	100	0.14
	- 3 WAY	UFSL	100	0.20
	- 4 WAY	UFSL	100	0.28
	- 5 WAY	UFSL	50	0.17
	- 10 WAY	UFSL	50	0.33
REMOVABLE SHORTING LINK		—	—	—
STUD FOR REMOVABLE SHORTING LINK		—	—	—


	CAT#	STD. PKG.	WT/STD.PKG-KG		
TERMINAL TYPE	KUDDF 4	50	1.13		
RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE	
	IEC	630 V	2.5 sq mm	6.3 AUT, 28 ALT	0.5 Nm
	CSA/UL	300 V	12-24 AWG	10 AUT, 20 ALT	7 Lbln
COLOUR:	G - GREY, K - KHAKHI R - RED, Y - YELLOW, B - BLUE BL - BLACK, GR - GREEN				
	KUDDF 4(G) KUDDF 4(K) KUDDF 4(R) KUDDF 4(Y) KUDDF 4(B) KUDDF 4(BL) KUDDF 4(GR)				
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36		
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36		
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34		
	CHKDS10	50	34.50		



FUSE TERMINAL KUDDF 4D*

* TYPE	AVAILABLE SIGNAL VOLTAGE
KUDDF 4D1	24 VDC
KUDDF 4D2	48 VDC
KUDDF 4D3	110 VDC
KUDDF 4D4	220 VDC
KUDDF 4D5	12 VDC

TERMINAL PITCH	8 mm(0.31 Inch)		
RATED CROSS SECTION	2.5 sq mm		
CONNECTION	Flexible	0.5 sq mm - 10 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 10 sq mm	
WIRE STRIPPING LENGTH	9 mm		
TYPE OF CONNECTION	4 screw clamps		
SCREW SIZE	M3		

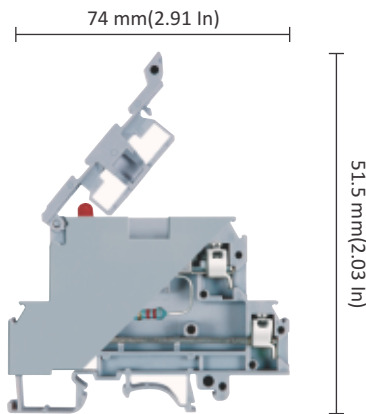

KUDDF 4D*

CAT# STD. PKG. WT/STD.PKG-KG

TERMINAL TYPE KUDDF 4D 50 1.14

VOLTAGE RATED CROSS SECTION CURRENT TORQUE

RATING

IEC 630 V 2.5 sq mm 6.3 AUT, 28 ALT 0.5 Nm

CSA/UL 300 V 12-24 AWG 10 AUT, 20 ALT 7 Lbin

COLOUR:


G - GREY, K - KHAKHI
R - RED, Y - YELLOW, B - BLUE
BL - BLACK, GR - GREEN

KUDDF 4D(G) KUDDF 4D(K)
KUDDF 4D(R) KUDDF 4D(Y) KUDDF 4D(B)
KUDDF 4D(BL) KUDDF 4D(GR)

MOUNTING CHANNEL CHS3/5/10 100/100/50 22/37/36

STANDARD LENGTHS CHK3/5/10 100/100/100 11/19/36










300 mm, 500 mm, 1000 mm CHK3S/5/10 100/100/100 11/17/34





 CHKDS10 50 34.50



accessories







CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		NOT REQUIRED		
PARTITION PLATE WITHOUT FOOT		—	—	—
PARTITION PLATE WITH FOOT		KBZF	100	0.75
SUPPORT FOR PROTECTION COVER		—	—	—
PROTECTION COVER		—	—	—
END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80
				
MARKING LABEL		LABEL KN 8	100 STRIPS	0.12
WARNING LABEL		—	—	—
GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50
				






LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 7	Flat  Round 	60947-7-1	1059	22.2 No.158	—

inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG



SHORTING LINK ASSEMBLY	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—
PERMANENT SHORTING LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—
COMB LINK	- 2 WAY	UFSL	100	0.14
	- 3 WAY	UFSL	100	0.20
	- 4 WAY	UFSL	100	0.28
	- 5 WAY	UFSL	50	0.17
	- 10 WAY	UFSL	50	0.33
REMOVABLE SHORTING LINK		—	—	—
STUD FOR REMOVABLE SHORTING LINK		—	—	—




accessories


	CAT#	STD. PKG.	WT/STD.PKG-KG
END PLATE 	EPF	50	0.40
PARTITION PLATE WITHOUT FOOT 	—	—	—
PARTITION PLATE WITH FOOT 	KBZF	100	0.75
SUPPORT FOR PROTECTION COVER 	—	—	—
PROTECTION COVER 	—	—	—
END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80
MARKING LABEL 	LABEL KN 12	100 STRIPS	0.18
WARNING LABEL 	—	—	—
GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50

FUSE TERMINAL KUDDF 4A*

* TYPE	AVAILABLE SIGNAL VOLTAGE
KUDDF 4A1	110 VAC
KUDDF 4A2	220 VAC







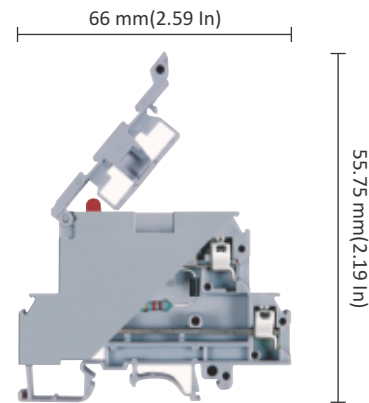TERMINAL PITCH	10 mm(0.47 Inch)
RATED CROSS SECTION	10 sq mm
CONNECTION	Flexible 0.5 sq mm - 10 sq mm 
POSSIBILITY	Rigid 0.5 sq mm - 10 sq mm 
WIRE STRIPPING LENGTH	10 mm
TYPE OF CONNECTION	2 screw clamps
SCREW SIZE	M4


LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 5	 Flat Round	60947-7-1	1059	22.2 No.158	—



KUDDF 4A*

inter connecting accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
SHORTING LINK ASSEMBLY			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
			
PERMANENT SHORTING LINK			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
			
STUD FOR PERMANENT SHORTING LINK 	—	—	—
COMB LINK			
- 2 WAY	UFSL	100	0.14
- 3 WAY	UFSL	100	0.20
- 4 WAY	UFSL	100	0.28
- 5 WAY	UFSL	50	0.17
- 10 WAY	UFSL	50	0.33
			
REMOVABLE SHORTING LINK 	—	—	—
STUD FOR REMOVABLE SHORTING LINK 	—	—	—

	CAT#	STD. PKG.	WT/STD.PKG-KG		
TERMINAL TYPE	KUDDF 4A	50	2.10		
RATING	IEC	1000 V	10 sq mm	12 A	1.4 Nm
	CSA/UL	600 V	6-18 AWG	12 A	12 Lbln
COLOUR:					
G - GREY, K - KHAKHI	KUDDF 4A(G)	KUDDF 4A(K)			
R - RED, Y - YELLOW, B - BLUE	KUDDF 4A(R)	KUDDF 4A(Y)	KUDDF 4A(B)		
BL - BLACK, GR - GREEN	KUDDF 4A(BL)	KUDDF 4A(GR)			
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36		
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36		
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34		
	CHKDS10	50	34.50		



FUSE TERMINAL KUF 10

accessories

CAT# STD. PKG. WT/STD.PKG-KG


END PLATE		EPF	50	0.40
-----------	---	-----	----	------

PARTITION PLATE WITHOUT FOOT		—	—	—
------------------------------	---	---	---	---

PARTITION PLATE WITH FOOT		KBZF	100	0.75
---------------------------	---	------	-----	------


SUPPORT FOR PROTECTION COVER		—	—	—
------------------------------	---	---	---	---



PROTECTION COVER		—	—	—
------------------	---	---	---	---


END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80

MARKING LABEL		LABEL KN 12	100 STRIPS	0.18
---------------	---	-------------	------------	------





WARNING LABEL		—	—	—
---------------	---	---	---	---

GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50

TERMINAL PITCH	12 mm(0.47 Inch)		
RATED CROSS SECTION	10 sq mm		
CONNECTION	Flexible	0.5 sq mm - 10 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 10 sq mm	
WIRE STRIPPING LENGTH	10 mm		
TYPE OF CONNECTION	2 screw clamps		
SCREW SIZE	M4		

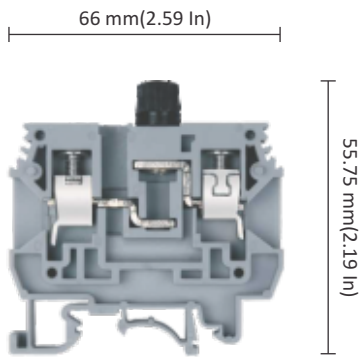


KUF 10

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 7	Flat  Round 	60947-7-1	1059	22.2 No.158	60079-15

TERMINAL TYPE	CAT#	STD. PKG.	WT/STD.PKG-KG
KUF 10	50	2.10	

RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
IEC	1000 V	10 sq mm	12 A	1.4 Nm
CSA/UL	600 V	6-18 AWG	12 A	12 Lbln

COLOUR:	
G - GREY, K - KHAKHI	KUF 10(G) KUF 10(K)
R - RED, Y - YELLOW, B - BLUE	KUF 10(R) KUF 10(Y) KUF 10(B)
BL - BLACK, GR - GREEN	KUF 10(BL) KUF 10(GR)
MOUNTING CHANNEL	CHS3/5/10 100/100/50 22/37/36
STANDARD LENGTHS	CHK3/5/10 100/100/100 11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10 100/100/100 11/17/34
	CHKDS10 50 34.50

inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG

SHORTING LINK ASSEMBLY	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—

PERMANENT SHORTING LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—

STUD FOR PERMANENT SHORTING LINK		—	—	—
----------------------------------	---	---	---	---










COMB LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—

REMOVABLE SHORTING LINK		—	—	—
-------------------------	---	---	---	---



STUD FOR REMOVABLE SHORTING LINK		—	—	—
----------------------------------	---	---	---	---







accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
END PLATE 	EPFH	100	0.32
PARTITION PLATE WITHOUT FOOT 	—	—	—
PARTITION PLATE WITH FOOT 	KBZF	100	0.75
SUPPORT FOR PROTECTION COVER 	—	—	—
PROTECTION COVER 	—	—	—
END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80
MARKING LABEL 	LABEL KN 9	100 STRIPS	0.13
WARNING LABEL 	—	—	—
GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50

FUSE TERMINAL KUFH 4




TERMINAL PITCH	9 mm(0.35 Inch)		
RATED CROSS SECTION	4 sq mm		
CONNECTION	Flexible	0.5 sq mm - 4 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 6 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	2 screw clamps		
SCREW SIZE	M3		

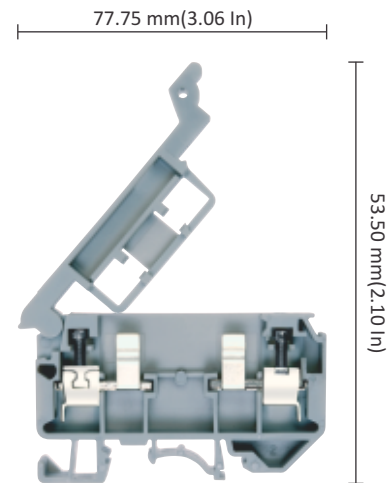
LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 5		60947-7-1	1059	22.2 No.158	60079-15



KUFH 4

inter connecting accessories



	CAT#	STD. PKG.	WT/STD.PKG-KG
SHORTING LINK ASSEMBLY			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
PERMANENT SHORTING LINK			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK 	—	—	—
COMB LINK			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
REMOVABLE SHORTING LINK 	—	—	—
STUD FOR REMOVABLE SHORTING LINK 	—	—	—


	CAT#	STD. PKG.	WT/STD.PKG-KG		
TERMINAL TYPE	KUFH 4	50	1.30		
RATING	IEC	800 V	4 sq mm	12 A	0.5 Nm
	CSA/UL	600 V	10-24 AWG	12 A	8 Lbln
COLOUR:					
G - GREY, K - KHAKHI	KUFH 4(G)	KUFH 4(K)			
R - RED, Y - YELLOW, B - BLUE	KUFH 4(R)	KUFH 4(Y)	KUFH 4(B)		
BL - BLACK, GR - GREEN	KUFH 4(BL)	KUFH 4(GR)			
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36		
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36		
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34		
	CHKDS10	50	34.50		



FUSE TERMINAL KUFH 4D*

* TYPE	AVAILABLE SIGNAL VOLTAGE
KUFH 4D1	24 VDC
KUFH 4D2	48 VDC
KUFH 4D3	110 VDC
KUFH 4D4	220 VDC
KUFH 4D5	12 VDC

TERMINAL PITCH	9 mm(0.35 Inch)		
RATED CROSS SECTION	4 sq mm		
CONNECTION	Flexible	0.5 sq mm - 4 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 6 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	2 screw clamps		
SCREW SIZE	M3		

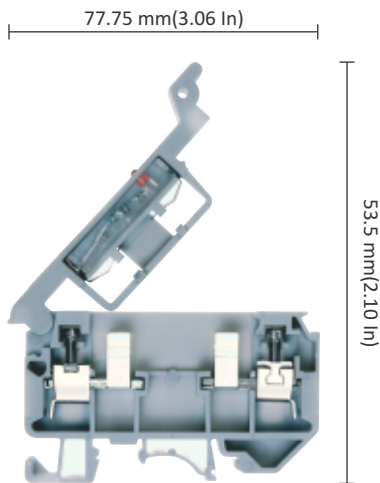

KUFH 4D*

CAT# STD. PKG. WT/STD.PKG-KG

TERMINAL TYPE	KUFH 4D	50	1.30
---------------	---------	----	------

VOLTAGE RATED CROSS SECTION CURRENT TORQUE


RATING

IEC	800 V	4 sq mm	12 A	0.5 Nm
CSA/UL	600 V	10-24 AWG	12 A	8 Lbin

COLOUR:

G - GREY, K - KHAKHI
R - RED, Y - YELLOW, B - BLUE
BL - BLACK, GR - GREEN

KUFH 4D(G) KUFH 4D(K)
KUFH 4D(R) KUFH 4D(Y) KUFH 4D(B)
KUFH 4D(BL) KUFH 4D(GR)

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50



accessories

CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		EPFH	100	0.32
-----------	---	------	-----	------

PARTITION PLATE WITHOUT FOOT		—	—	—
------------------------------	---	---	---	---

PARTITION PLATE WITH FOOT		KBZF	100	0.75
---------------------------	---	------	-----	------

SUPPORT FOR PROTECTION COVER		—	—	—
------------------------------	---	---	---	---

PROTECTION COVER		—	—	—
------------------	---	---	---	---


END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80







MARKING LABEL		LABEL KN 9	100 STRIPS	0.13
---------------	---	------------	------------	------

WARNING LABEL		—	—	—
---------------	---	---	---	---

GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50



LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 5	Flat  Round 	60947-7-1	1059	22.2 No.158	—

inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG

SHORTING LINK ASSEMBLY	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—

PERMANENT SHORTING LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—










STUD FOR PERMANENT SHORTING LINK		—	—	—
----------------------------------	---	---	---	---

COMB LINK	- 2 WAY	—	—	—
	- 3 WAY	—	—	—
	- 4 WAY	—	—	—
	- 5 WAY	—	—	—
	- 10 WAY	—	—	—

REMOVABLE SHORTING LINK		—	—	—
-------------------------	---	---	---	---



STUD FOR REMOVABLE SHORTING LINK		—	—	—
----------------------------------	---	---	---	---

accessories


	CAT#	STD. PKG.	WT/STD.PKG-KG
END PLATE 	EPFH	100	0.32
PARTITION PLATE WITHOUT FOOT 	—	—	—
PARTITION PLATE WITH FOOT 	KBZF	100	0.75
SUPPORT FOR PROTECTION COVER 	—	—	—
PROTECTION COVER 	—	—	—
END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80
MARKING LABEL 	LABEL KN 9	100 STRIPS	0.13
WARNING LABEL 	—	—	—
GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50

FUSE TERMINAL KUFH 4A*

* TYPE	AVAILABLE SIGNAL VOLTAGE
KUFH 4A1	110 VAC
KUFH 4A2	220 VAC




TERMINAL PITCH	9 mm(0.35 Inch)	
RATED CROSS SECTION	4 sq mm	
CONNECTION	Flexible	0.5 sq mm - 4 sq mm 
POSSIBILITY	Rigid	0.5 sq mm - 6 sq mm 
WIRE STRIPPING LENGTH	12 mm	
TYPE OF CONNECTION	2 screw clamps	
SCREW SIZE	M3	

77.75 mm(3.06 In)

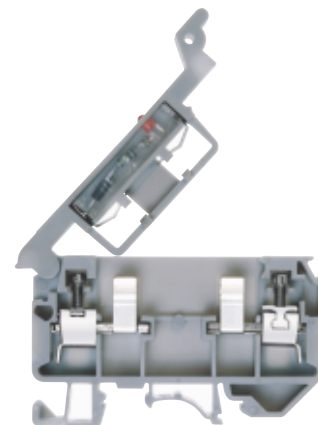



















53.5 mm(2.10 In)

KUFH 4A*

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 5	 Flat Round	60947-7-1	1059	22.2 No.158	—

inter connecting accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
SHORTING LINK ASSEMBLY			
- 2 WAY 	—	—	—
- 3 WAY 	—	—	—
- 4 WAY 	—	—	—
- 5 WAY 	—	—	—
- 10 WAY 	—	—	—
PERMANENT SHORTING LINK			
- 2 WAY 	—	—	—
- 3 WAY 	—	—	—
- 4 WAY 	—	—	—
- 5 WAY 	—	—	—
- 10 WAY 	—	—	—
STUD FOR PERMANENT SHORTING LINK 	—	—	—
COMB LINK			
- 2 WAY 	—	—	—
- 3 WAY 	—	—	—
- 4 WAY 	—	—	—
- 5 WAY 	—	—	—
- 10 WAY 	—	—	—
REMOVABLE SHORTING LINK 	—	—	—
STUD FOR REMOVABLE SHORTING LINK 	—	—	—


	CAT#	STD. PKG.	WT/STD.PKG-KG
TERMINAL TYPE	KUFH 4A	50	1.30

	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE	
RATING	IEC	800 V	4 sq mm	12 A	0.5 Nm
	CSA/UL	600 V	10-24 AWG	12 A	8 Lbln

COLOUR:

G - GREY, K - KHAKHI
R - RED, Y - YELLOW, B - BLUE
BL - BLACK, GR - GREEN

KUFH 4A(G) KUFH 4A(K)
KUFH 4A(R) KUFH 4A(Y) KUFH 4A(B)
KUFH 4A(BL) KUFH 4A(GR)

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50




FUSE TERMINAL UBDF 4



LED KIT
Voltage: 12 VDC, 24VDC,
48 VDC, 110 VDC, 220 VDC
110 VAC, 220VAC

TERMINAL PITCH	8.25 mm(0.32 Inch)		
RATED CROSS SECTION	4 sq mm		
CONNECTION	Flexible	0.5 sq mm - 4 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 6 sq mm	
WIRE STRIPPING LENGTH	8 mm		
TYPE OF CONNECTION	2 screw clamps		
SCREW SIZE	M3		

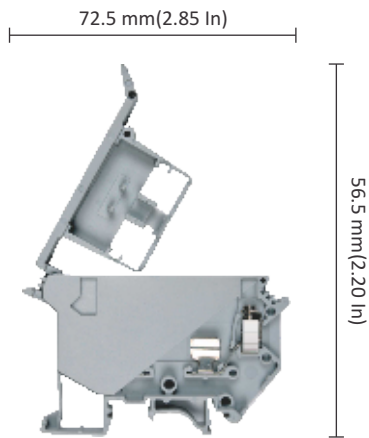

UBDF 4

CAT# STD. PKG. WT/STD.PKG-KG

TERMINAL TYPE	UBDF 4	100	2.10
---------------	--------	-----	------

VOLTAGE RATED CROSS SECTION CURRENT TORQUE

RATING

IEC	1000 V	4 sq mm	6.3 A	0.5 Nm
CSA/UL	600 V	10-24 AWG	10 A	5 Lbin

COLOUR:

G - GREY, K - KHAKHI
R - RED, Y - YELLOW, B - BLUE
BL - BLACK, GR - GREEN

UBDF 10(G) UBDF 10(K)
UBDF 10(R) UBDF 10(Y) UBDF 10(B)
UBDF 10(BL) UBDF 10(GR)

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50



accessories

CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		Not Required		
PARTITION PLATE WITHOUT FOOT		—	—	—
PARTITION PLATE WITH FOOT		—	—	—
SUPPORT FOR PROTECTION COVER		—	—	—
PROTECTION COVER		—	—	—
END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80
MARKING LABEL		LABEL U8.25	100 STRIPS	0.16
WARNING LABEL		—	—	—
GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
		Flat	60947-7-1	1059	22.2 No.158	60079-15
	Ø 5	Round				

inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG

SHORTING LINK ASSEMBLY	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY	—	—	—
PERMANENT SHORTING LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—
COMB LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY	CLUF	100	0.20
		CLUF	100	0.28
		CLUF	100	0.36
		CLUF	50	0.22
		CLUF	50	0.40
REMOVABLE SHORTING LINK		—	—	—
STUD FOR REMOVABLE SHORTING LINK		—	—	—