



Distribution Block

Labels: These terminals have SNAP-IN arrangement for terminal identification labels made from Polyamide 6,6 in white colour. Blank and printed markers can be made available.




Current bar: Current bar made from electrolytic grade of copper or copper alloy provides high electrical conductivity and maximum mechanical strength. Current bar has serrations for ensuring firm grip of conductors.

This range of terminals has sectional / multi way current bar which is common for termination of incoming as well as outgoing conductors.



Screws: Terminal screws are made using hardened steel. Screws are either Cheese head or Philips head type. These screws are suitably electroplated for environmental protection against corrosion.

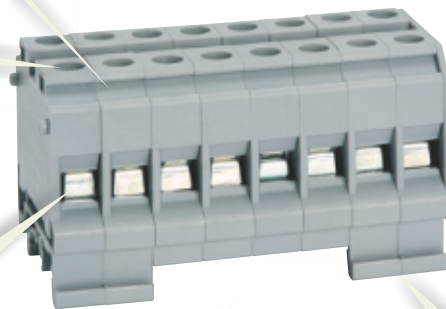

Clamps: 'elmex' terminals have clamp with double interlock construction that give high level of mechanical stability to clamp and enhanced torque characteristics. These clamps are made up of CRCA steel and undergo heat treatment. Heat treatment ensures better mechanical properties and gives higher endurance.



Housing: Housing is made from insulating material Polyamide 6,6 – one of the most versatile engineering thermoplastic. It conforms to flammability grade V2 as per ANSI / UL Standard UL 94. Insulation housing in V0 grade is also available against specific customer requirements. This material has high value of CTI > 600 V and is RoHS compliant. Also it is free from Si compounds and halogenated compounds.



Mounting: Terminal has mounting arrangement compatible to both TS 32 and TS 35. This arrangement complies with DIN / IEC Standards.



Range: 'elmex' Distribution Blocks are capable of terminating cable sizes from 0.5 sq mm (20 AWG) to 50 sq mm (6 AWG).






'elmex' Distribution block has common bus bar that ensure minimal voltage drop across the distribution circuit. Suitable distribution block needs to be selected from different variants depending upon incoming and outgoing current requirements.

DISTRIBUTION BLOCK

DBK 8

accessories

CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		—	—	—
PARTITION PLATE WITHOUT FOOT		KBX	100	0.46
PARTITION PLATE WITH FOOT		KBXF	100	0.54
SUPPORT FOR PROTECTION COVER		—	—	—
PROTECTION COVER		—	—	—

END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80





MARKING LABEL		LABEL KN 10	100 STRIPS	0.15
---------------	---	-------------	------------	------


WARNING LABEL		—	—	—
---------------	---	---	---	---





GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50



TERMINAL PITCH	82 mm (3.23 Inch)		
RATED CROSS SECTION	IC - 10 sq mm, OG - 10 sq mm		
CONNECTION	Flexible	2.5 sq mm – 10 sq mm	
POSSIBILITY	Rigid	2.5 sq mm - 16 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	Screw clamps		
SCREW SIZE	M4		

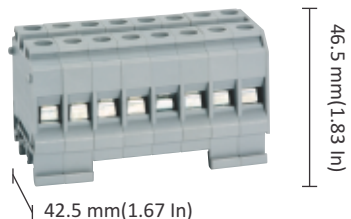DBK 8



LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 7	Flat  Round 	60947-7-1	1059	—	—


inter connecting accessories







CAT# STD. PKG. WT/STD.PKG-KG

TERMINAL TYPE	DBK 8	1	0.16
---------------	-------	---	------

RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
	IEC	800 V	IC - 10 sq mm, OG - 10 sq mm	57 A
CSA/UL	600 V	16-6 AWG	65 A	14 LbIn

COLOUR:	
G - GREY, K - KHAKHI	DBK 8(G) DBK 8(K)
R - RED, Y - YELLOW, B - BLUE	DBK 8(R) DBK 8(Y) DBK 8(B)
BL - BLACK, GR - GREEN	DBK 8(BL) DBK 8(GR)

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50

SHORTING LINK ASSEMBLY	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
PERMANENT SHORTING LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—	
COMB LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
REMOVABLE SHORTING LINK		—	—	—	
STUD FOR REMOVABLE SHORTING LINK		—	—	—	





accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
END PLATE		—	—
PARTITION PLATE WITHOUT FOOT	KBX	100	0.46
PARTITION PLATE WITH FOOT	KBXF	100	0.54
SUPPORT FOR PROTECTION COVER		—	—
PROTECTION COVER		—	—
END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80
MARKING LABEL	LABEL KN 10	100 STRIPS	0.15
WARNING LABEL		—	—
GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50

DISTRIBUTION BLOCK

DBK 1X2

TERMINAL PITCH	53 mm (2.09 inch)		
RATED CROSS SECTION	IC - 35 sq mm, OG - 10 sq mm		
CONNECTION	Flexible	IC - 10 sq mm – 50 sq mm, OG - 2.5 sq mm – 10 sq mm	
POSSIBILITY	Rigid	IC - 10 sq mm – 50 sq mm, OG - 2.5 sq mm – 16 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	1 Nut connection for IC and screw clamp connection for OG		
SCREW SIZE	IC – M8, OG – M4		

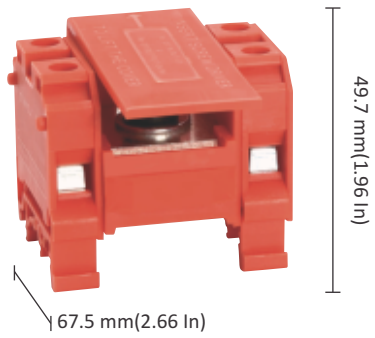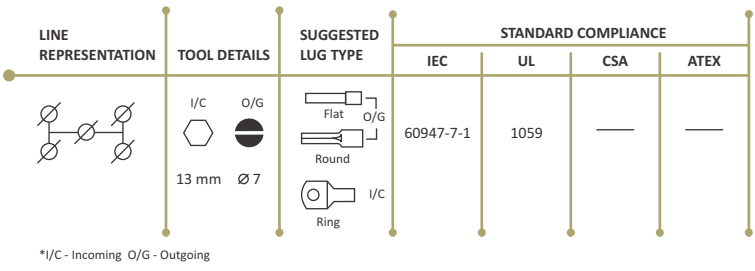

DBK 1X2

inter connecting accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
SHORTING LINK ASSEMBLY	- 2 WAY	—	—
	- 3 WAY	—	—
	- 4 WAY	—	—
	- 5 WAY	—	—
	- 10 WAY	—	—
PERMANENT SHORTING LINK	- 2 WAY	—	—
	- 3 WAY	—	—
	- 4 WAY	—	—
	- 5 WAY	—	—
	- 10 WAY	—	—
STUD FOR PERMANENT SHORTING LINK		—	—
COMB LINK	- 2 WAY	—	—
	- 3 WAY	—	—
	- 4 WAY	—	—
	- 5 WAY	—	—
	- 10 WAY	—	—
REMOVABLE SHORTING LINK		—	—
STUD FOR REMOVABLE SHORTING LINK		—	—

	CAT#	STD. PKG.	WT/STD.PKG-KG	
TERMINAL TYPE	DBK 1X2	1	0.13	
RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
	IEC 800 V	IC - 35 sq mm, OG - 10 sq mm	IC - 114 A, OG - 57 A	IC - 6 Nm, OG - 1.2 Nm
	CSA/UL 600 V	IC - 8-1 AWG, OG - 16-6 AWG	IC - 130 A, OG - 130 A	IC - 55 LbIn Nm, OG - 14 LbIn
COLOUR:	G - GREY, K - KHAKHI R - RED, Y - YELLOW, B - BLUE BL - BLACK, GR - GREEN			
	DBK 1X2(G)	DBK 1X2(K)		
	DBK 1X2(R)	DBK 1X2(Y)	DBK 1X2(B)	
	DBK 1X2(BL)	DBK 1X2(GR)		
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36	
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36	
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34	
	CHKDS10	50	34.50	








DISTRIBUTION BLOCK

DBK 1X4

accessories

CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		—	—	—
PARTITION PLATE WITHOUT FOOT		KBX	100	0.46
PARTITION PLATE WITH FOOT		KBXF	100	0.54
SUPPORT FOR PROTECTION COVER		—	—	—
PROTECTION COVER		—	—	—

END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80





MARKING LABEL		LABEL KN 10	100 STRIPS	0.15
---------------	---	-------------	------------	------


WARNING LABEL		—	—	—
---------------	---	---	---	---









GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50

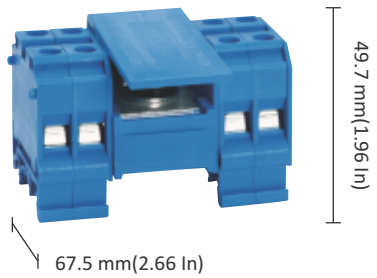

TERMINAL PITCH	73 mm (2.87 Inch)		
RATED CROSS SECTION	IC - 35 sq mm, OG - 10 sq mm		
CONNECTION	Flexible	IC - 10 sq mm – 50 sq mm, OG - 2.5 sq mm – 10 sq mm	
POSSIBILITY	Rigid	IC - 10 sq mm – 50 sq mm, OG - 2.5 sq mm – 16 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	1 Nut connection for IC and screw clamp connection for OG		
SCREW SIZE	IC – M8, OG – M4		

DBK 1X4



LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	I/C  13 mm O/G  Ø 7	Flat  O/G  Round  I/C  Ring 	60947-7-1	1059	—	—

*I/C - Incoming O/G - Outgoing


inter connecting accessories







CAT# STD. PKG. WT/STD.PKG-KG

TERMINAL TYPE	DBK 1X4	1	0.16
---------------	---------	---	------

RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
IEC	800 V	IC - 35 sq mm, OG - 10 sq mm	IC - 114 A, OG - 57 A	IC - 6 Nm, OG - 1.2 Nm
CSA/UL	600 V	IC - 8-1 AWG, OG - 16-6 AWG	IC - 130 A, OG - 130 A	IC - 55 Lbin Nm, OG - 14 Lbin

COLOUR:	
G - GREY, K - KHAKHI	DBK 1X4(G) DBK 1X4(K)
R - RED, Y - YELLOW, B - BLUE	DBK 1X4(R) DBK 1X4(Y) DBK 1X4(B)
BL - BLACK, GR - GREEN	DBK 1X4(BL) DBK 1X4(GR)

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50

SHORTING LINK ASSEMBLY	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
PERMANENT SHORTING LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—	
COMB LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
REMOVABLE SHORTING LINK		—	—	—	
STUD FOR REMOVABLE SHORTING LINK		—	—	—	




accessories


	CAT#	STD. PKG.	WT/STD.PKG-KG
END PLATE		—	—
PARTITION PLATE WITHOUT FOOT	KBX	100	0.46
PARTITION PLATE WITH FOOT	KBXF	100	0.54
SUPPORT FOR PROTECTION COVER		—	—
PROTECTION COVER		—	—
END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80
MARKING LABEL	LABEL KN 10	100 STRIPS	0.15
WARNING LABEL		—	—
GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50

DISTRIBUTION BLOCK DBK 1X8

TERMINAL PITCH	113 mm (4.45 Inch)	
RATED CROSS SECTION	IC - 35 sq mm, OG - 10 sq mm	
CONNECTION	Flexible	IC - 10 sq mm – 50 sq mm, OG - 2.5 sq mm – 10 sq mm
POSSIBILITY	Rigid	IC - 10 sq mm – 50 sq mm, OG - 2.5 sq mm – 16 sq mm
WIRE STRIPPING LENGTH	12 mm	
TYPE OF CONNECTION	1 Nut connection for IC and screw clamp connection for OG	
SCREW SIZE	IC – M8, OG – M4	

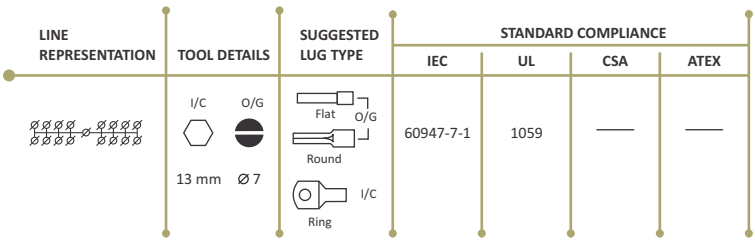

*I/C - Incoming O/G - Outgoing

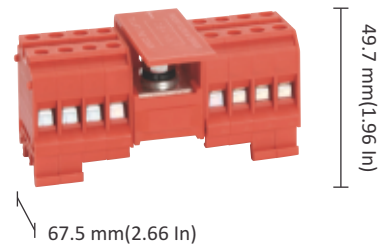

DBK 1X8

inter connecting accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
SHORTING LINK ASSEMBLY	- 2 WAY	—	—
	- 3 WAY	—	—
	- 4 WAY	—	—
	- 5 WAY	—	—
	- 10 WAY	—	—
PERMANENT SHORTING LINK	- 2 WAY	—	—
	- 3 WAY	—	—
	- 4 WAY	—	—
	- 5 WAY	—	—
	- 10 WAY	—	—
STUD FOR PERMANENT SHORTING LINK		—	—
COMB LINK	- 2 WAY	—	—
	- 3 WAY	—	—
	- 4 WAY	—	—
	- 5 WAY	—	—
	- 10 WAY	—	—
REMOVABLE SHORTING LINK		—	—
STUD FOR REMOVABLE SHORTING LINK		—	—

	CAT#	STD. PKG.	WT/STD.PKG-KG	
TERMINAL TYPE	DBK 1X8	1	0.22	
RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
	IEC 800 V	IC - 35 sq mm, OG - 10 sq mm	IC - 114 A, OG - 57 A	IC - 6 Nm, OG - 1.2 Nm
	CSA/UL 600 V	IC - 8-1 AWG, OG - 16-6 AWG	IC - 130 A, OG - 130 A	IC - 55 LbIn Nm, OG - 14 LbIn
COLOUR:				
G - GREY, K - KHAKHI	DBK 1X8(G)	DBK 1X8(K)		
R - RED, Y - YELLOW, B - BLUE	DBK 1X8(R)	DBK 1X8(Y)	DBK 1X8(B)	
BL - BLACK, GR - GREEN	DBK 1X8(BL)	DBK 1X8(GR)		
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36	
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36	
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34	
	CHKDS10	50	34.50	








DISTRIBUTION BLOCK

FDBK 8

accessories

CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		—	—	—
PARTITION PLATE WITHOUT FOOT		KBX	100	0.46
PARTITION PLATE WITH FOOT		KBXF	100	0.54
SUPPORT FOR PROTECTION COVER		—	—	—
PROTECTION COVER		—	—	—


END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80





MARKING LABEL		LABEL KN 6.5	100 STRIPS	0.10
---------------	---	--------------	------------	------


WARNING LABEL		—	—	—
---------------	---	---	---	---





GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50



TERMINAL PITCH	55.5 mm (2.19 Inch)		
RATED CROSS SECTION	IC - 4 sq mm, OG - 4 sq mm		
CONNECTION	Flexible	0.5 sq mm – 4 sq mm	
POSSIBILITY	Rigid	0.5 sq mm - 6 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	1 Nut connection for IC and screw clamp connection for OG		
SCREW SIZE	M3		

FDBK 8



LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	 Ø 5	Flat  Round 	60947-7-1	1059	—	—


inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG







TERMINAL TYPE	FDBK 8	1	0.09
---------------	--------	---	------

	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE	
RATING	IEC	800 V	IC - 4 sq mm, OG - 4 sq mm	32 A	0.5 Nm
	CSA/UL	600 V	20-10 AWG	35 A	7 LbIn

COLOUR:	
G - GREY, K - KHAKHI	FDBK 8(G) FDBK 8(K)
R - RED, Y - YELLOW, B - BLUE	FDBK 8(R) FDBK 8(Y) FDBK 8(B)
BL - BLACK, GR - GREEN	FDBK 8(BL) FDBK 8(GR)

MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34
	CHKDS10	50	34.50



SHORTING LINK ASSEMBLY	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
PERMANENT SHORTING LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—	
COMB LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
REMOVABLE SHORTING LINK		—	—	—	
STUD FOR REMOVABLE SHORTING LINK		—	—	—	

accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
END PLATE		—	—
PARTITION PLATE WITHOUT FOOT	KBX	100	0.46
PARTITION PLATE WITH FOOT	KBXF	100	0.54
SUPPORT FOR PROTECTION COVER		—	—
PROTECTION COVER		—	—
END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80
MARKING LABEL	LABEL KN 6.5	100 STRIPS	0.10
WARNING LABEL		—	—
GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50


DISTRIBUTION BLOCK

FDBK 1X4

TERMINAL PITCH	61.5 mm (2.42 Inch)		
RATED CROSS SECTION	IC - 25 sq mm, OG - 4 sq mm		
CONNECTION	Flexible	IC - 10 sq mm – 25 sq mm, OG - 0.5 sq mm – 4 sq mm	
POSSIBILITY	Rigid	IC - 10 sq mm – 25 sq mm, OG - 0.5 sq mm – 6 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	1 Nut connection for IC and screw clamp connection for OG		
SCREW SIZE	IC – M6, OG – M3		

LINE REPRESENTATION	TOOL DETAILS	SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
			IEC	UL	CSA	ATEX
	I/C: 10 mm O/G: Ø 5	Flat O/G Round Ring I/C	60947-7-1	1059	—	—

*I/C - Incoming O/G - Outgoing

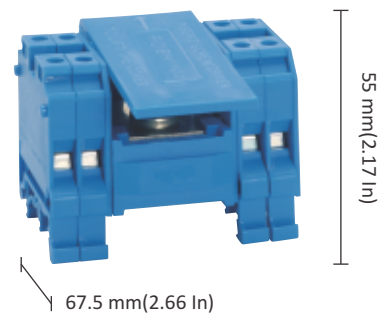

FDBK 1X4

inter connecting accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
SHORTING LINK ASSEMBLY			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
PERMANENT SHORTING LINK			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—
COMB LINK			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
REMOVABLE SHORTING LINK		—	—
STUD FOR REMOVABLE SHORTING LINK		—	—

	CAT#	STD. PKG.	WT/STD.PKG-KG				
TERMINAL TYPE	FDBK 1X4	1	0.08				
RATING	IEC	800 V	IC - 25 sq mm, OG - 4 sq mm	IC - 64 A, OG - 32 A	IC - 2.5 Nm, OG - 0.5 Nm		
	CSA/UL	600 V	IC - 12-4 AWG, OG - 20-10 AWG	IC - 80 A, OG - 80 A	IC - 22 LbIn, OG - 7 LbIn		
COLOUR:	G - GREY, K - KHAKHI R - RED, Y - YELLOW, B - BLUE BL - BLACK, GR - GREEN						
	FDBK 1X4(G)	FDBK 1X4(K)	FDBK 1X4(B)	FDBK 1X4(Y)	FDBK 1X4(R)	FDBK 1X4(BL)	FDBK 1X4(GR)
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36				
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36				
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34				
	CHKDS10	50	34.50				








DISTRIBUTION BLOCK

FDBK 1X8

accessories

CAT# STD. PKG. WT/STD.PKG-KG

END PLATE		—	—	—
PARTITION PLATE WITHOUT FOOT		KBX	100	0.46
PARTITION PLATE WITH FOOT		KBXF	100	0.54
SUPPORT FOR PROTECTION COVER		—	—	—
PROTECTION COVER		—	—	—


END CLAMPS		SCKN	100	0.80
		SCUN	100	0.94
		SCUSL	50	0.63
		SCUDD	50	0.64
		DCKN	100	0.80






MARKING LABEL		LABEL KN 6.5	100 STRIPS	0.10
---------------	---	--------------	------------	------





WARNING LABEL		—	—	—
---------------	---	---	---	---

GROUP MARKING CARRIER		SCKNMLH	50	0.55
		SCUNMLH	50	0.60
		DCKNMLH	50	0.50

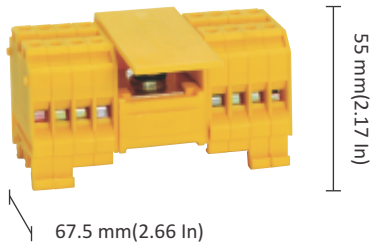

TERMINAL PITCH	88.5 mm (3.48 Inch)		
RATED CROSS SECTION	IC - 25 sq mm, OG - 4 sq mm		
CONNECTION	Flexible	IC - 10 sq mm – 25 sq mm, OG - 0.5 sq mm – 4 sq mm	
POSSIBILITY	Rigid	IC - 10 sq mm – 25 sq mm, OG - 0.5 sq mm – 6 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	1 Nut connection for IC and screw clamp connection for OG		
SCREW SIZE	IC – M6, OG – M3		



LINE REPRESENTATION	TOOL DETAILS		SUGGESTED LUG TYPE	STANDARD COMPLIANCE			
				IEC	UL	CSA	ATEX
	I/C	O/G	 Flat  Round  Ring	60947-7-1	1059	—	—
	13 mm	Ø 5					

*I/C - Incoming O/G - Outgoing


FDBK 1X8







inter connecting accessories

CAT# STD. PKG. WT/STD.PKG-KG

TERMINAL TYPE	FDBK 1X8	1	0.15
---------------	----------	---	------

RATING	VOLTAGE	RATED CROSS SECTION	CURRENT	TORQUE
	IEC	800 V	IC - 25 sq mm, OG - 4 sq mm	IC - 64 A, OG - 32 A
CSA/UL	600 V	IC - 12-4 AWG, OG - 20-10 AWG	IC - 80 A, OG - 80 A	IC - 22 LbIn, OG - 7 LbIn

COLOUR:	
G - GREY, K - KHAKHI	FDBK 1X8(G) FDBK 1X8(K)
R - RED, Y - YELLOW, B - BLUE	FDBK 1X8(R) FDBK 1X8(Y) FDBK 1X8(B)
BL - BLACK, GR - GREEN	FDBK 1X8(BL) FDBK 1X8(GR)
MOUNTING CHANNEL	CHS3/5/10 100/100/50 22/37/36
STANDARD LENGTHS	CHK3/5/10 100/100/100 11/19/36
300 mm, 500 mm, 1000 mm	CHKS3/5/10 100/100/100 11/17/34
	CHKDS10 50 34.50

SHORTING LINK ASSEMBLY	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
PERMANENT SHORTING LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
STUD FOR PERMANENT SHORTING LINK		—	—	—	
COMB LINK	- 2 WAY - 3 WAY - 4 WAY - 5 WAY - 10 WAY		—	—	—
REMOVABLE SHORTING LINK		—	—	—	
STUD FOR REMOVABLE SHORTING LINK		—	—	—	






accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
END PLATE	—	—	—
PARTITION PLATE WITHOUT FOOT	KBX	100	0.46
PARTITION PLATE WITH FOOT	KBXF	100	0.54
SUPPORT FOR PROTECTION COVER	—	—	—
PROTECTION COVER	—	—	—
END CLAMPS	SCKN	100	0.80
	SCUN	100	0.94
	SCUSL	50	0.63
	SCUDD	50	0.64
	DCKN	100	0.80
MARKING LABEL	LABEL KN 10/6.5	100 STRIPS	0.15/0.10
WARNING LABEL	—	—	—
GROUP MARKING CARRIER	SCKNMLH	50	0.55
	SCUNMLH	50	0.60
	DCKNMLH	50	0.50


DISTRIBUTION BLOCK

DFBK 12

TERMINAL PITCH	90 mm (3.54 Inch)		
RATED CROSS SECTION	10 sq mm, 4 sq mm		
CONNECTION	Flexible	2.5 sq mm – 10 sq mm, 0.5 sq mm – 4 sq mm	
POSSIBILITY	Rigid	2.5 sq mm - 16 sq mm, 0.5 sq mm – 6 sq mm	
WIRE STRIPPING LENGTH	12 mm		
TYPE OF CONNECTION	Screw clamps		
SCREW SIZE	M4, M3		

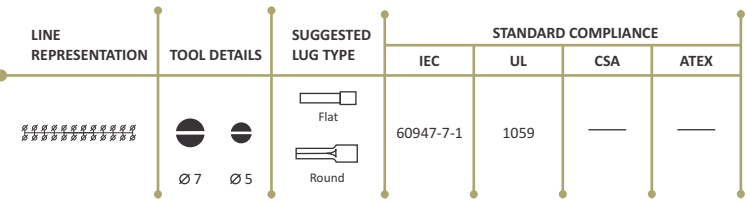

*I/C - Incoming O/G - Outgoing

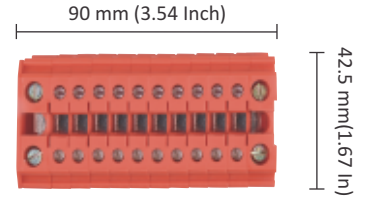

DFBK 12

inter connecting accessories

	CAT#	STD. PKG.	WT/STD.PKG-KG
SHORTING LINK ASSEMBLY			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
PERMANENT SHORTING LINK			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
STUD FOR PERMANENT SHORTING LINK	—	—	—
COMB LINK			
- 2 WAY	—	—	—
- 3 WAY	—	—	—
- 4 WAY	—	—	—
- 5 WAY	—	—	—
- 10 WAY	—	—	—
REMOVABLE SHORTING LINK	—	—	—
STUD FOR REMOVABLE SHORTING LINK	—	—	—

	CAT#	STD. PKG.	WT/STD.PKG-KG		
TERMINAL TYPE	DFBK 12	1	0.16		
RATING	IEC	800 V	10 sq mm, 4 sq mm	50 A	1.2 Nm, 0.5Nm
	CSA/UL	600 V	16-6 AWG, 20-10 AWG	120 A	14 Lbln, 7 Lbln
COLOUR:					
G - GREY, K - KHAKHI	DBK 8(G)	DBK 8(K)			
R - RED, Y - YELLOW, B - BLUE	DBK 8(R)	DBK 8(Y)	DBK 8(B)		
BL - BLACK, GR - GREEN	DBK 8(BL)	DBK 8(GR)			
MOUNTING CHANNEL	CHS3/5/10	100/100/50	22/37/36		
STANDARD LENGTHS	CHK3/5/10	100/100/100	11/19/36		
300 mm, 500 mm, 1000 mm	CHKS3/5/10	100/100/100	11/17/34		
	CHKDS10	50	34.50		

