



Made in turkey



ساخت کشور ترکیه

جهت اطلاع از قیمت های تعداد کالا با شماره های زیر تماس بگیرید:

031-32680335

سنسور فشار اتمک مناسب برای مایعات و هوای فشرده و مواد غیر فاسد شدنی و مایعات غیر چسب ناک و مورد استفاده برای کنترل سطح مایعات مخازن .

برای اندازه گیری فشار 100 میلی بار و خروجی جریان 4 تا 20 میلی امپرساخت کشور ترکیه.



**PRESSURE TRANSMITTER**  
“ Flush Diaphragm / Industrial Applications “

**BT-214-G1**




- Flush Diaphragm / Relative pressure measurement
- Chemistry , Food , Sanitary and etc. applications
- Stainless stell case and wetted parts
- EMC and Reverse polarity protection
- Analog output 4...20mA or 0...10VDC
- Standart ranges available from stock
- High Sensitivity
- Internal “ZERO” and “SPAN” adjustment
- Cost Effective

#### BT-214 G1/2 Technical Specifications

Pressure Range	Relative pressure measurement From 1 BAR to 400 BAR and 100mbar to 600mbar different ranges
Output	4...20mA ( 2 Wire ) , 0...10VDC ( 3 Wire ) ( Internal “ZERO” and “SPAN” adjustment )
Pressure connection	G1/2“ male
Electrical Connection	Female connector DIN43650
Power Supply	24VDC
Accuracy	%0,5 @ +25°C
Protection Class	IP65
Media Temperature	-40°C +120°C
Membran	Seramic
Housing Material	Stainless steel ( 304L )
Weight	120 gram

#### Applications

- Chemistry
- Food
- Sanitary
- Level Control
- Water Technologies
- Automation Applications

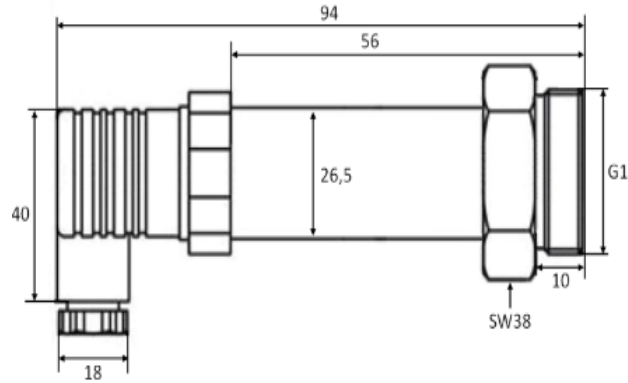

Pin No	Signal
--------	--------

2 Wire 4-20mA Connection	
1	+24VDC Power Supply
2	4...20mA Analog Out

Pin No	Signal
--------	--------

3 Wire 0-10VDC Connection	
1	+24VDC Power Supply
2	GND
3	0...10VDC Analog Out

## Order Code

### Model No

**B T - 1 0 - 2 1 4 - 1 B A R**

#### Output

10 Series : 4-20mA  
20 Series : 0-10VDC

#### Diaphragm Model

210 Series : Standart Diaphragm

#### Defined Pressure Range

From 1 BAR to 600 BAR and  
100mbar to 600mbar different ranges