



1/3" Sony CCD Dome Camera, 600 TVL, 2.8 ~ 12 mm Varifocal Lens, DNR, D-WDR, OSD




Specifications

TV SYSTEM	NTSC	PAL
Pickup device	1/3" 410K Sony super HAD II color CCD	
Number of pixels	NTSC: 768(H)x494(V)	PAL: 752(H)x582(V)
System of signal	NTSC/PAL	
Horizontal resolution	Color: 600 TV Lines	
Mini illumination	0.1 Lux /F1.2	
Lens	2.8 ~ 12mm DC Auto iris lens	
S/N ratio	>50 dB	
Gamma correction	> 0.45	
Operation temperature	-10~50°C	
Video output	Composite Video 1.0Vp-p/75Ω	
Vandal Proof	Yes	
DNR	Yes	
Power supply	DC12V 10% 5.0 Watt	



Dimensions

Part name & Dimension

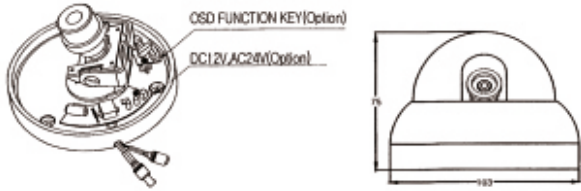

Installation

Step.1



Stick a pad for free-screwing

Step.2




Fix the surface mount bracket by screws on the pad

Step.3



Adjust desired scene by turning and moving the hemisphere by hand

Step.4



Put the dome cover over the base and fix the dome cover on the base by L-wrench

Setup Menu Flow

OSD MENU SETTING

LENS	MANUAL		
	DC		
	VIDEO		
EXPOSURE	SHUTTER	AUTO, 1/60(50), FLK, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/5000, 1/10000, 1/100000	
	BRIGHTNESS	0-255	
	AGC	OFF, LOW, MIDDLE, HIGH	
	DWDR	LEVEL	0-35
WHITE BAL	ATW1		
	ATW2		
	ATW.-SET		
MANUAL	COLOR TEMP		
	BLUE		
	RED		
BACKLIGHT	BLC	AREA SEL	AREA1, AREA2
		AREA STATE	ON, OFF
		GAIN	0-255
		HEIGHT	0-4
	WIDTH	0-15	
	LEFT/RIGHT	0-13	
	TOP/BOTTOM	0-11	
	HLC	LEVEL	0-255
MODE		ALL DAY, NIGHT ONLY	
D...>N LEVEL		33-208	
D...>N DELAY		1-30 SEC	
AUTO	N...>D LEVEL	0-80	
	N...>D DELAY	1-30 SEC	
	COLOR		
	B/W	BURST	ON, OFF
		IR GAIN	0-255
		HEIGHT	0-8
WIDTH		0-13	
LEFT/RIGHT	0-2		
TOP/BOTTOM	0-10		
EXIT			
DPC	COVER THE LENS THAN PRESS ENTER KEY		
MOTION	CAM TITLE	ON, OFF	
	AREA SEL	AREA 1-4	
	AREA STATE	ON, OFF	
	HEIGHT	0-13	
	WIDTH	0-13	
	LEFT/RIGHT	0-11	
	TOP/BOTTOM	0-11	
	DEGREE	0-255	
	VIEW	ON, OFF	

OSD MENU SETTING

SPECIAL	PRIVACY	AREA SEL	AREA1-8		
		AREA STATE	ON, OFF		
		HEIGHT	0-133		
		WIDTH	0-180		
		LEFT/RIGHT	0-167		
		TOP/BOTTOM	0-116		
		COLOR	0-15		
		LT	0-110		
	PAR. LINE	LB	0-170		
		RT	0-110		
		RB	0-110		
		F	0-110		
		N	0-110		
		T	0-110		
		LENS SHAD	LEVEL	0-255	
		2DNR	ON, OFF		
	IMAGE ADJ	MIRROR	ON, OFF		
		FONT COLOR	FONT	0-15	
		CONTRAST	ID & TITLE	0-15	
		SHARPNESS	0-51		
DISPLAY		CRT	PED LEVEL	0-63	
			COLOR GAIN	0-255	
			GAMMA	0.5-1.0	
		LCD	PED LEVEL	0-63	
			COLOR GAIN	0-255	
			GAMMA	0.5-1.0	
USER	PED LEVEL	0-63			
	COLOR GAIN	0-255			
NEG. IMAGE	ON, OFF				
COMM ADJ	CAM ID				
	BAUD RATE				
	PROTOCOL				
	DISPLAY ID				
	ID POS				
LANGUAGE	ENGLISH, CHINESE				
VERSION	21 01 10				
RESET	FACTORY	RESET			
EXIT					

* Depending on setting of sub menu, the default value may be changed.

