



# Test Report: LRS-200-24

---

200W Single Output Switching Power Supply

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY TEST

## ■ RELIABILITY TEST


ENVIRONMENT TEST

## DESIGN VERIFY TEST


### OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 21.6~ 28.8V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta: 25°C	21.329V~30.081V/230VAC 21.274V~30.073V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -1.5%~ 1.5%	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1:- 0.04%~ 0.04%
3	LINE REGULATION (Max)	V1: -0.5%~ 0.5%	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: -0.02%~-0.02%
4	LOAD REGULATION(Max)	V1:-0.5%~ 0.5%	I/P: 230VAC O/P:FULL -MIN LOAD Ta:25°C	V1: 0.0%~ 0%
5	OVER/UNDERSHOOT TEST	< ±10%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 150mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 82.0mVp-p

high frequency :

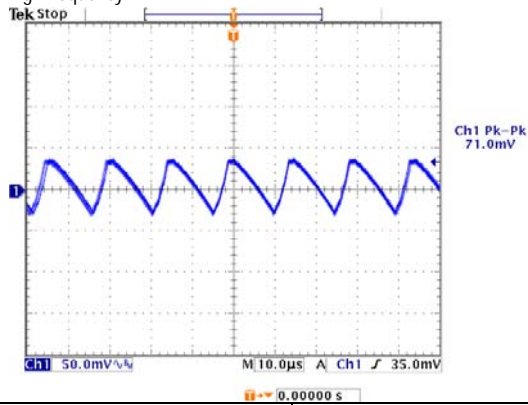


low frequency :

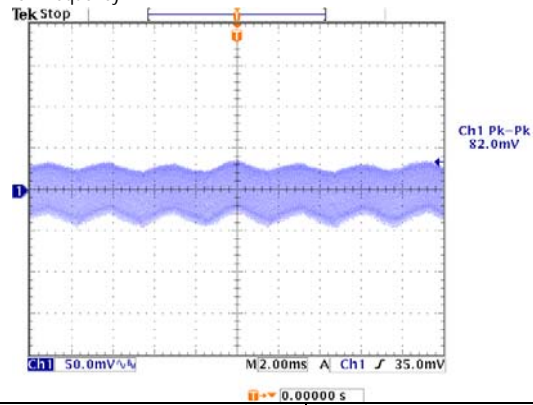

7	SET UP TIME(Max)	230VAC/1300ms 115VAC/ 1300ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 944ms 115VAC/ 1042ms
---	------------------	---------------------------------	--	---------------------------------


INPUT=230VAC/50HZ @ FULL LOAD

CH1 : Output Voltage CH4 : AC Input Voltage

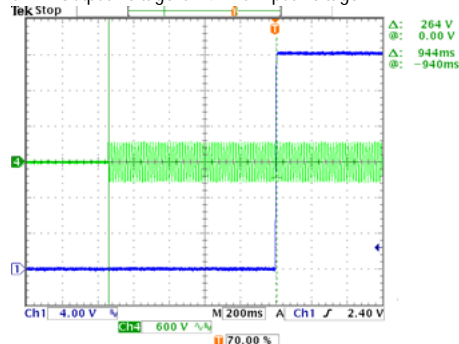

INPUT=115VAC/60HZ @ FULL LOAD







CH1 : Output Voltage CH4 : AC Input Voltage

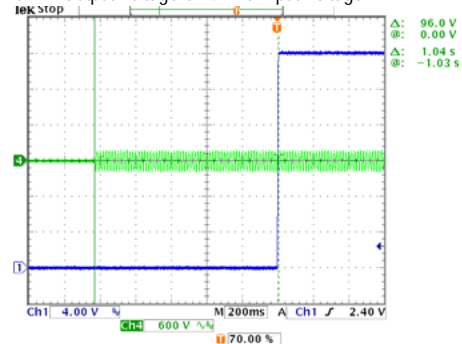



200W Single Output Switching Power Supply



LRS-200series

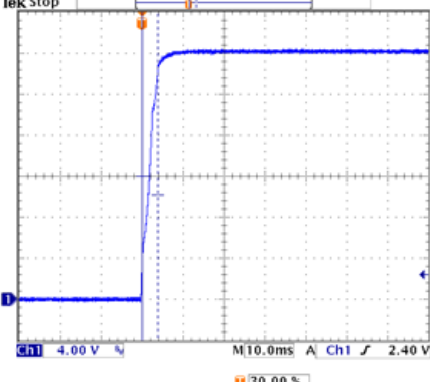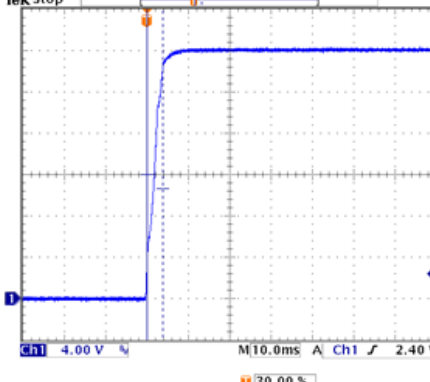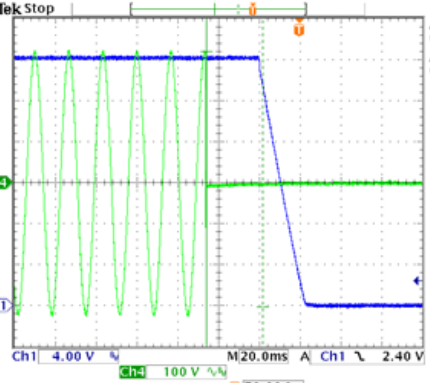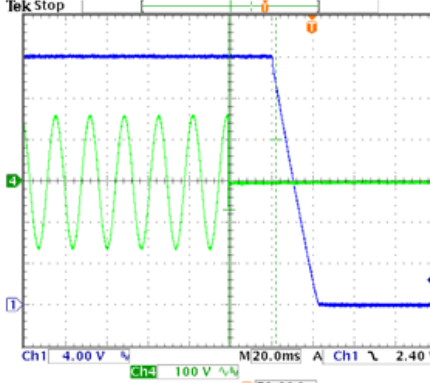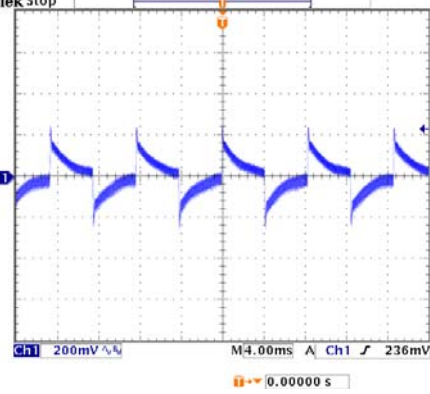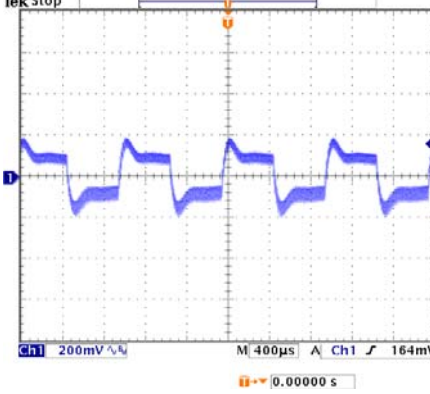8	RISE TIME (Max)	230VAC/ 50ms 115VAC/ 50ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 3.80ms 115VAC/3.80ms
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p> 		
9	HOLD UP TIME(Typ)	230VAC/ 16ms 115VAC/ 12ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 27.6ms 115VAC/ 22.8ms
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH4 : AC Input Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH4 : AC Input Voltage</p> 		
10	DYNAMIC LOAD	V1: 1200 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	496mVp-p 388mVp-p
<p>FULL /50% LOAD 50%DUTY / 120HZ</p> 		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p> 		



INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	136V~264V
			I/P: (1)LOW-LINE-3V=167 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:170 VAC ~264 VAC O/P:FULL-MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ)	230V/ 2.2.A 115V/ 4A	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I =2.03A/ 230VAC I =3.74A/ 115VAC
4	LEAKAGE CURRENT	< 2 mA / 240 VAC	I/P: 240 VAC O/P: Min LOAD Ta: 25°C	L-FG: 0.460 mA N-FG: 0.460 mA
5	NO LOAD CONSUMPTION	< 0.75 W	I/P: 115VAC I/P: 230VAC O/P: NO LOAD Ta: 25°C	< 0.57W < 0.52 W
6	INRUSH CURRENT(Typ)	230V/ 60A 115V/ 60A COLD START	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I =50.0A/ 230VAC I =47.2A/ 115VAC

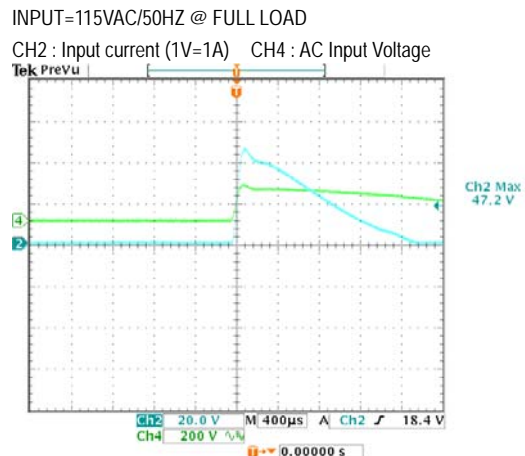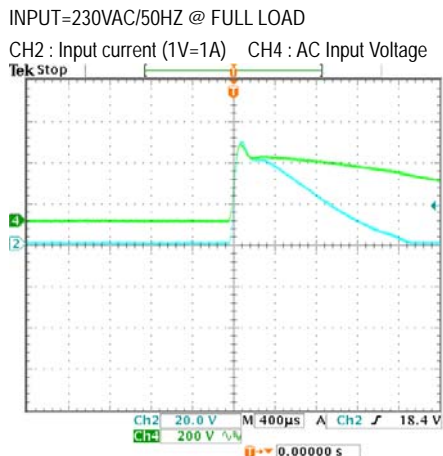



200W Single Output Switching Power Supply

LRS-200series

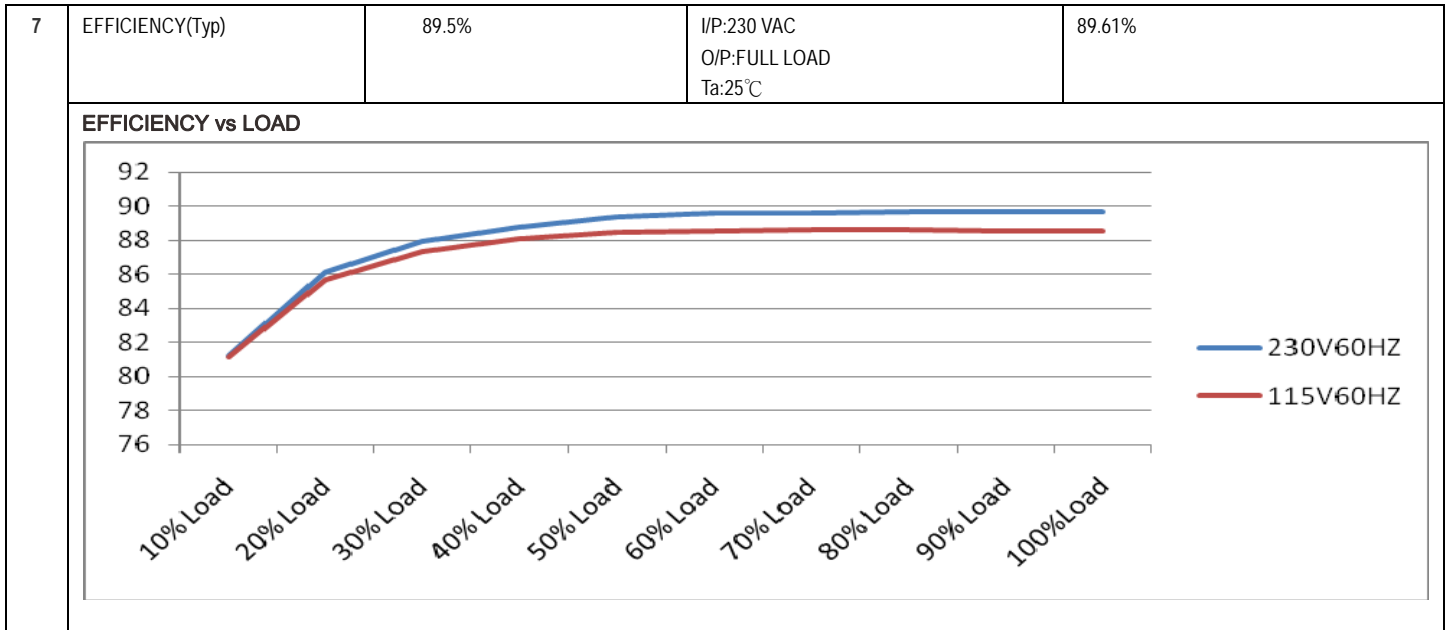

**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110 %- 140 %	I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	128.63%/ 230VAC 127.61%/115VAC Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	CH: 28.8 V- 33.6 V	30.7V/ 230VAC 31.8V/115VAC O/P: MIN LOAD Ta:25°C	Hiccup mode, recovers automatically after fault condition is removed
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230 VAC O/P: FULL LOAD	O.T.P. Active Hiccup mode, recovers automatically after fault condition is removed
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

## COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) <b>Peak Voltage</b>	Q1 Rated 13A/600V	I/P:High-Line +3V =267V O/P: (1)Full Load Turn on (2)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (3)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25°C	(1)436V (2)440V (3)440V
2	Diode <b>Peak Voltage</b>	Q102 Rated 20 A/150V  Q103 Rated 20A/200V	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2)Output Short Ta:25°C	Q102: (1)118V (2)122V  Q103: (1)170V (2)160V
3	<b>Input Capacitor Voltage</b>	C5 Rated: 330 μ / 200V	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1)180V (2)186V (3)181V
4	<b>Control IC Voltage Test</b>	PWM IC U1 Rated 28 V (MAX.) 10V (MIN.)	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Output short (3)No load VR (min) Ta:25°C	U1 (1) 20.5V (2) 20.3V (3) 20.5V

## SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG :2KVAC/min O/P-FG:0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:0.6 KVAC/min Ta:25°C	I/P-O/P: 2.431mA I/P-FG: 3.34mA O/P-FG:2.72 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 9999MΩ I/P-FG: 9999MΩ O/P-FG: 9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	22mΩ

## RELIABILITY TEST

### ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																
1	TEMPERATURE RISE TEST	MODEL: LRS-200-24 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=24.6°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=48.4°C																																																																																		
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 24.6 °C</th> <th>HIGH AMBIENT Ta=48.4 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>U1</td><td>58.3°C</td><td>79.7°C</td></tr> <tr><td>2</td><td>LF1</td><td>50.5°C</td><td>73.3°C</td></tr> <tr><td>3</td><td>BD1</td><td>54.0°C</td><td>75.8°C</td></tr> <tr><td>4</td><td>C36</td><td>62.8°C</td><td>86.5°C</td></tr> <tr><td>5</td><td>C5</td><td>59.3°C</td><td>80.1°C</td></tr> <tr><td>6</td><td>C6</td><td>60.1°C</td><td>80.6°C</td></tr> <tr><td>7</td><td>T2</td><td>59.2°C</td><td>81.1°C</td></tr> <tr><td>8</td><td>Q1</td><td>64.5°C</td><td>88.4°C</td></tr> <tr><td>9</td><td>Q2</td><td>60.4°C</td><td>83.9°C</td></tr> <tr><td>10</td><td>T1coil</td><td>85.4°C</td><td>108.6°C</td></tr> <tr><td>11</td><td>RTH3</td><td>79.2°C</td><td>102.2°C</td></tr> <tr><td>12</td><td>L100</td><td>84.3°C</td><td>108.8°C</td></tr> <tr><td>13</td><td>C106</td><td>49.5°C</td><td>73.9°C</td></tr> <tr><td>14</td><td>Q102</td><td>68.0°C</td><td>89.7°C</td></tr> <tr><td>15</td><td>Q103</td><td>71.7°C</td><td>93.7°C</td></tr> <tr><td>16</td><td>C201</td><td>56.7°C</td><td>80.2°C</td></tr> <tr><td>17</td><td>C200</td><td>64.6°C</td><td>88.1°C</td></tr> <tr><td>18</td><td>L101</td><td>65.9°C</td><td>88.5°C</td></tr> <tr><td>19</td><td>RTH1</td><td>86.7°C</td><td>106.9°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 24.6 °C	HIGH AMBIENT Ta=48.4 °C	1	U1	58.3°C	79.7°C	2	LF1	50.5°C	73.3°C	3	BD1	54.0°C	75.8°C	4	C36	62.8°C	86.5°C	5	C5	59.3°C	80.1°C	6	C6	60.1°C	80.6°C	7	T2	59.2°C	81.1°C	8	Q1	64.5°C	88.4°C	9	Q2	60.4°C	83.9°C	10	T1coil	85.4°C	108.6°C	11	RTH3	79.2°C	102.2°C	12	L100	84.3°C	108.8°C	13	C106	49.5°C	73.9°C	14	Q102	68.0°C	89.7°C	15	Q103	71.7°C	93.7°C	16	C201	56.7°C	80.2°C	17	C200	64.6°C	88.1°C	18	L101	65.9°C	88.5°C	19	RTH1	86.7°C	106.9°C
NO	Position	ROOM AMBIENT Ta= 24.6 °C	HIGH AMBIENT Ta=48.4 °C																																																																																	
1	U1	58.3°C	79.7°C																																																																																	
2	LF1	50.5°C	73.3°C																																																																																	
3	BD1	54.0°C	75.8°C																																																																																	
4	C36	62.8°C	86.5°C																																																																																	
5	C5	59.3°C	80.1°C																																																																																	
6	C6	60.1°C	80.6°C																																																																																	
7	T2	59.2°C	81.1°C																																																																																	
8	Q1	64.5°C	88.4°C																																																																																	
9	Q2	60.4°C	83.9°C																																																																																	
10	T1coil	85.4°C	108.6°C																																																																																	
11	RTH3	79.2°C	102.2°C																																																																																	
12	L100	84.3°C	108.8°C																																																																																	
13	C106	49.5°C	73.9°C																																																																																	
14	Q102	68.0°C	89.7°C																																																																																	
15	Q103	71.7°C	93.7°C																																																																																	
16	C201	56.7°C	80.2°C																																																																																	
17	C200	64.6°C	88.1°C																																																																																	
18	L101	65.9°C	88.5°C																																																																																	
19	RTH1	86.7°C	106.9°C																																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230 VAC O/P: 125% LOAD Ta: 25°C	TEST: OK																																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 264VAC/100VAC O/P: 100 % LOAD Ta= -25 °C	TEST: OK																																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P: 272 VAC O/P: FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST: OK																																																																																
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0-50°C)	I/P: 230 VAC O/P: FULL LOAD	±0.005%/°C (0-50°C)																																																																																
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																																																



## 200W Single Output Switching Power Supply

# LRS-200series

7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -25°C~ 70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec	OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10-500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 5G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta=50 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 50 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 50 °C LIFE TIME	(1) 553675HRS (2) 93919HRS (3) 138388HRS (4) 183951HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE: 347.5KHRS	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C	

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ